



T60GT▶
Temperproof RFID Label

T60GT

T60GT Vehicle Tag

Air interface protocol

EPC Global Class1 Gen2 ISO 18000-6C

Operational frequency

Global 860-960MHz

Tag dimensions

97 x 24 mm / 3.819 " x 0.247 "

Applications:



Mechanical Specification

Substrate	PET
Weight	1g / pc
Delivery format	5000 pcs on reel
Pitch on reel	25.797 mm / 1.02"
Reel core inner diameter	76 mm / 3"
Tag dimensions	97 x 24 mm / 3.819" x 0.247"



Environmental Resistance

Operating temperature	-20°C~80°C / -4°F~176°F
Ambient temperature	-20°C~80°C / -4°F~176°F
Storage condition	2 year at +20°C / 50% RH
Expected lifetime	2 years in normal operating conditions
Tamper Proof, UV Protection	



Electrical Specification

Device type	Class 1 Generation 2 passive UHF RF ID transponder
Air interface protocol	EPC Global Class1 Gen2 ISO 18000-6C
Operational frequency	Global 860-960MHz
IC type	Monza 4QT (In addition to the special requirements)
Memory configuration	EPC 128 bits; Unique TID 48 bits; User Memory 512 bits
Read range (2W ERP)	Up to 5 m / 16.404 ft

Unwinding Direction

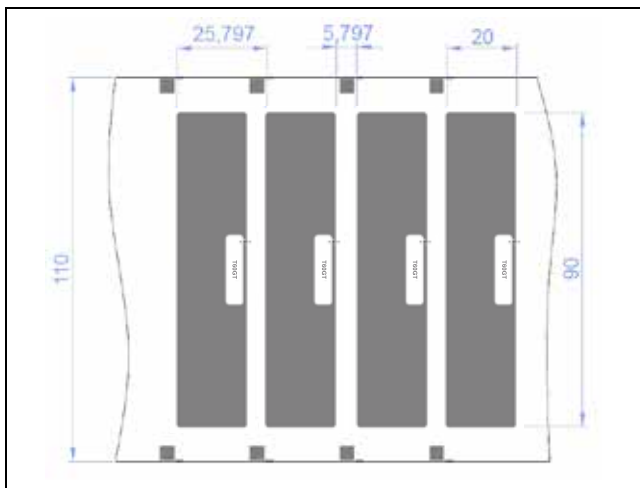

Average

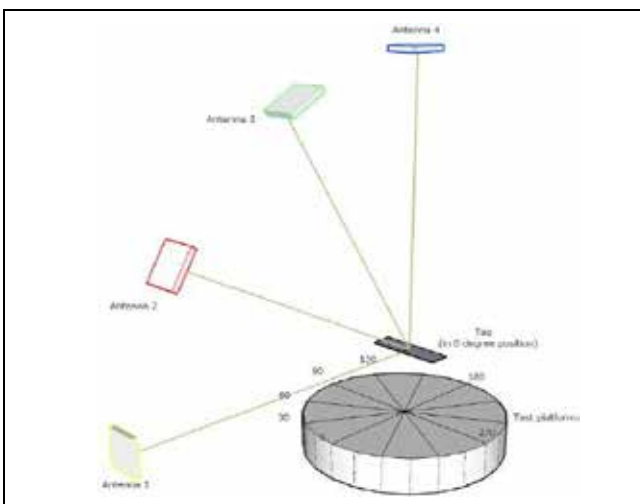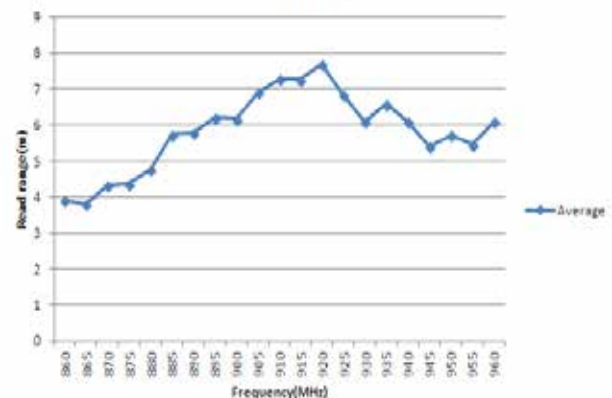

Yenidoğan Merve Mah. Atatürk Cad. No 314 - Sancaktepe - ISTANBUL

Mobile: +90 553 268 6634 / Fax: +90 216 465 9402

www.rfidmarket.com.tr