


SVK 4000

ENCLOSURE COOLER

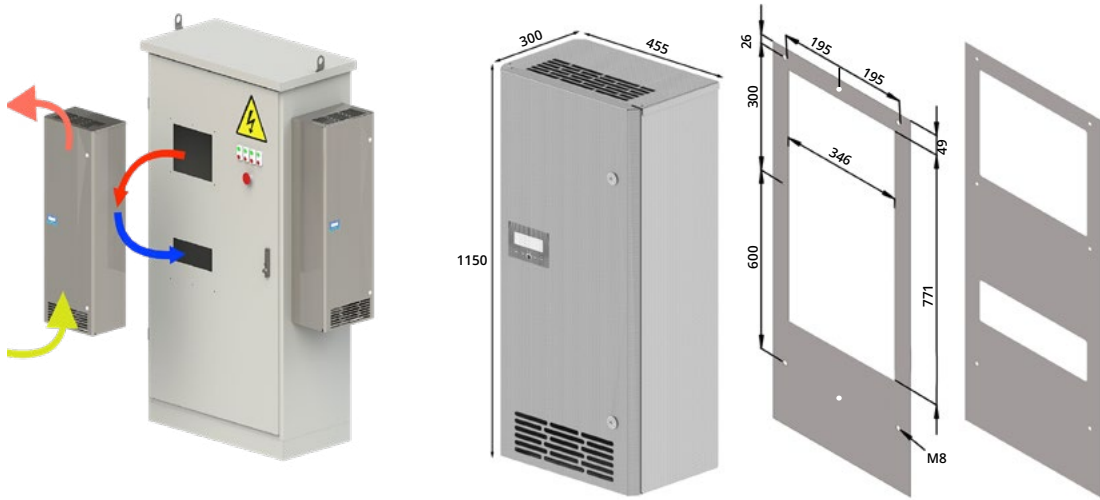

TECHNICAL DETAILS

	SVK 4000
Cooling Capacity (L35 / L35)	3700 W
Type Of Refrigerant	R134A
Amount Of Refrigerant	950 gr
Adjustability Range	15 °C...35 °C
Hysteresis	4 °C
External Circuit	1425 m³/h
Internal Circuit	945 m³/h
Rated Frequency	50/60 Hz
Input Voltage	380 V - 415 V
Power Absorbed L35 L35	1040 W
Current Cooling ON	2.6 A
Starting / High-Current (RLA / LRA)	4.0 A / 13.0 A
Weight	62 kg
Height x Width x Depth mm	1150 x 455 x 300
Corrosion Protection (cover)	Stainless or Painted Steel
Orientation	Wall Mount
System of Protection	IP 54
Ambient Air Temperature	-20 °C ... +55 °C
Compressor	Embraco
Fans	EbmPapst
Communication Options	EtherNet/IP , ModBus TCP or RTU
Mobile Control	GooglePlay - AppStore




3700 Watt

Cooling Capacity

- **Easy Installation**, Wall Mount / Door Type
- **Smart System**, Digital Smart Controller
- **Steel Case**, Stainless Steel or Painted
- **Easy Maintenance**, Openable Cover
- **A Class Equipment**, High Quality parts



PRODUCT PARTS

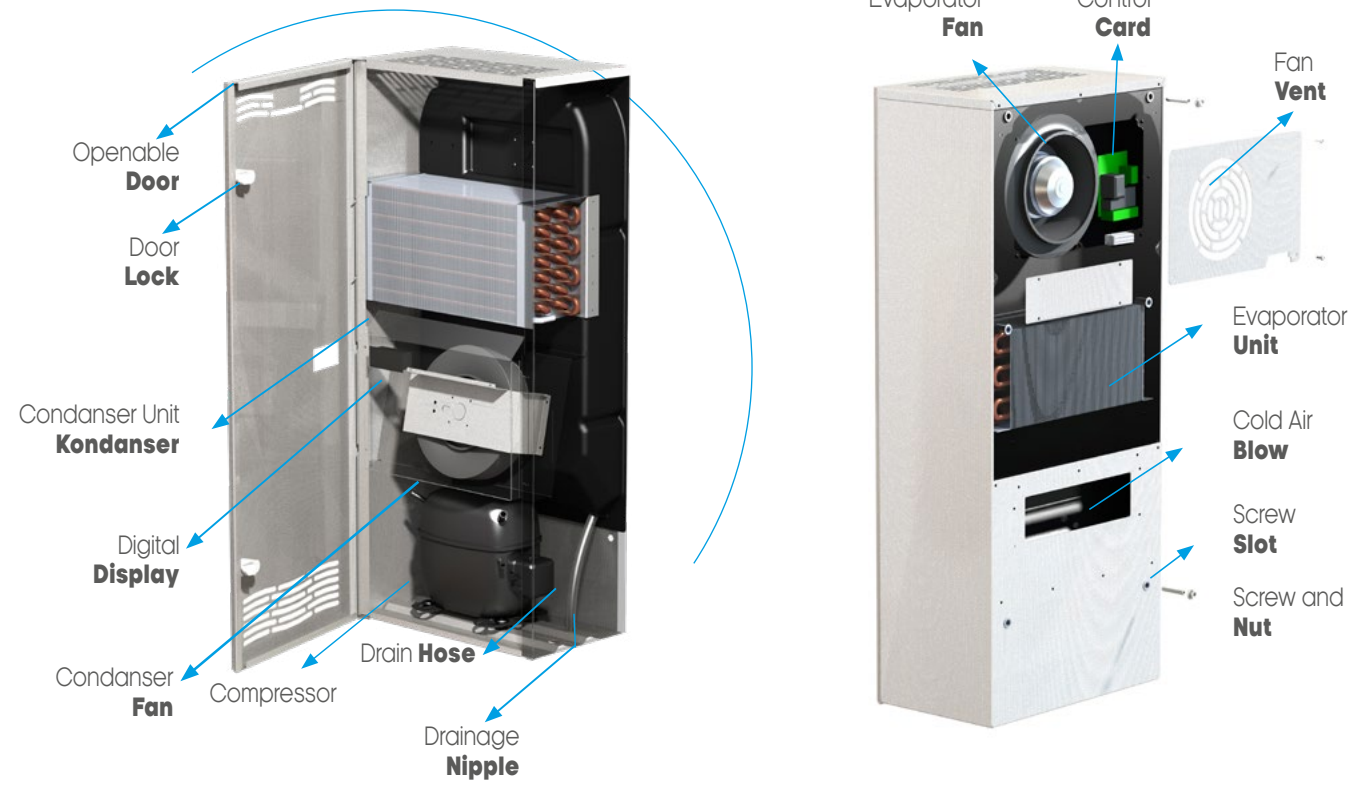


PRODUCT DESCRIPTION

- 1- Openable cover, Easy Maintenance
- 2- Smart digital display and Smart electronic control
- 3- Remote control with Ethernet and RS485 Communication
- 4- Door switch connection
- 5- Fault warning system/dry contact; faults can be read on PLC or 220 V output
- 6- Three-sensor protection; Advance information feature for maintenance
- 7- Steel out body, modern design. Stainless or painted (optional)

ELECTRONIC CONTROL




DISPLAY

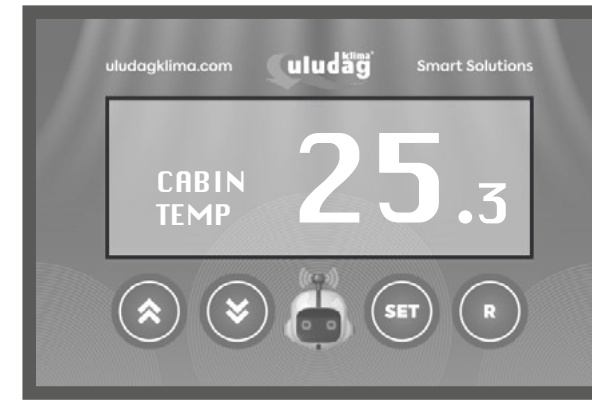

ETHERNET

CONTROL BOARDS

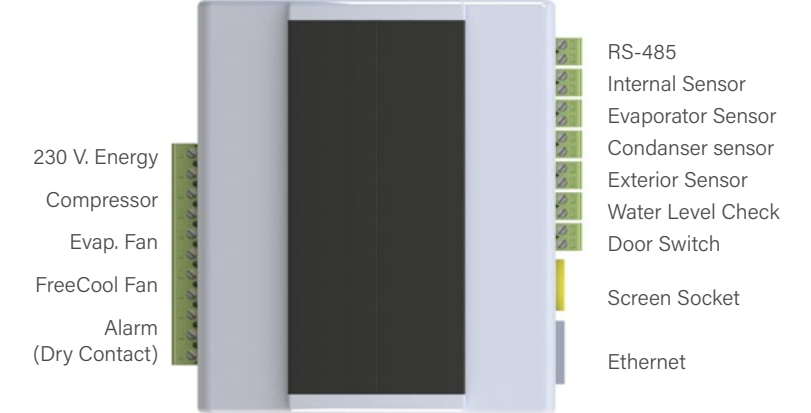

INSTALLATION


01 TEMPLATE



02 CUTTING



03 FIXING



04 ENERGY

