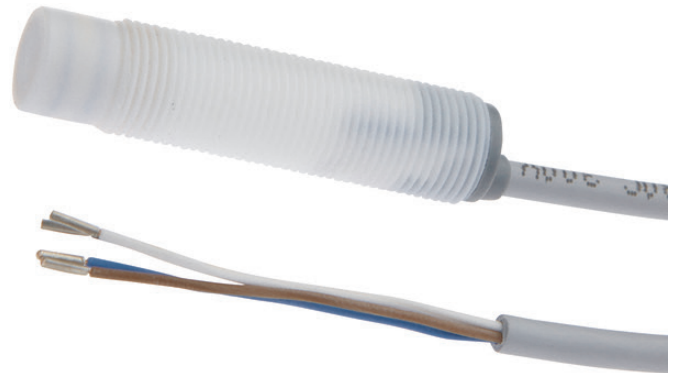


KN12C606
CAPACITIVE SENSORS • ENLARGED AMBIENT TEMPERATURE

Capacitive proximity switches are contact-free sensors. They detect metallic and non-metallic objects, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material, its dimensions and the response sensitivity, which is set via a potentiometer. The vibration-resistant sensors can be approached laterally or frontally. Capacitive proximity switches are used for presence detection (e.g. sealing detection), positioning (e.g. PET bottles), counting (e.g. plastic caps), level detection (e.g. lubricant) or distance measurements (e.g. thickness measurement) of solid and liquid materials.


MECHANICAL FEATURES

Active area material of sensor	PTFE
Ambient temperature	-25 °C ... 100 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	PTFE
Increased ambient temperatures > 80°C	+
Material of cable sheath	Silicone
Mechanical mounting condition for sensor	Non-flush
Number of cores	4
Pressure-proof	-
Sensor length	50 mm
Teflon housing	+
Thread pitch	1 mm
Thread size, metric	12
Wire cross section	0.14 mm ²

ELECTRICAL FEATURES

Cascadable	-
Max. output current	250 mA
Reverse polarity protection	+
Setting procedure	Manual adjustment
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 35 V
Switching distance	4 mm
Switching distance	0.5 mm ... 10 mm
Type of electrical connection	Cable
Type of switching function	Programmable/configurable
Type of switching output	PNP
Voltage type	DC
With monitoring function of downstream devices	-

OTHER FEATURES

Level detection

+

Other

Packaging dimensions

77.0mm x 25.0mm x 123.0mm

Shipping weight

0.1kg

Tariff code

85365019

Classification

ipf product group

700

eClass 8.0

27270102

eClass 9.0

27270102

eClass 9.1

27270102

ETIM-5.0

EC002715


ETIM-6.0

EC002715

ETIM-7.0

EC002715

Connection

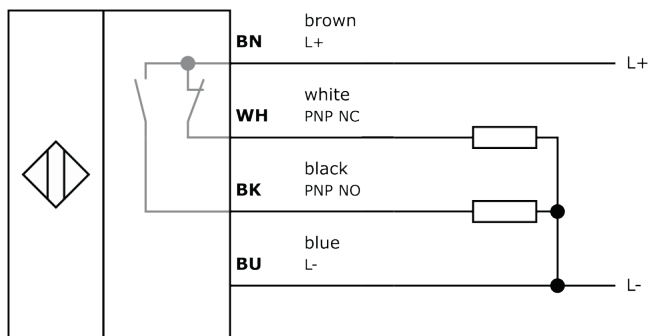

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Please download the software or driver required for operating your new device on our homepage: www.ipf.de

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.