




Dimensions

Overall Height (H)	Container Height (H)	Lenght (L)	Width (W)
Unit: mm 58±1.5	52±1.5	97±1.5	24±1

unit:mm

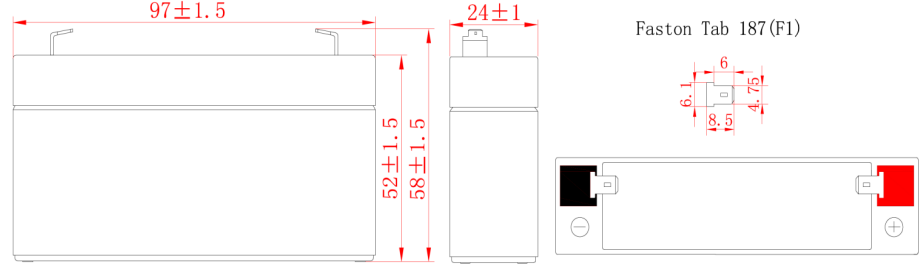

Features

PXEC series are the universal battery, which adopt the AGM valve Control technology and high purity raw materials.

The battery own the advantage of high consistency, good performance and long cycle Life. The battery are applicable to UPS/EPS, medical equipment and safety system.

Specification

Internal Cell	3
Nominal Voltage	6
Capacity	1.3Ah @ 20hr-rate to 1.75V/cell @25°C (77°F)
Weight	Approx. 0.29 kg±3%
Max. Discharging Current	19.5A(5sec)
Internal resistance	Approx. 40 mΩ
Operating Temperature Range	Discharge: -15°C~50°C (5°F~122°F) Charge: -15°C~40°C (5°F~104°F) Storage: -15°C~40°C (5°F~104°F)
Nominal Operating Temperature Range	25°C±3°C(77°F±5°F)
Float Charging Voltage	6.75~6.9V VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	0.65A
Equalization and Cycle Service	7.2~7.5V VDC/unit average at 25°C (77°F)
Self Discharge	Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	F1-Faston Tab187
Container Material	ABS UL 94-HB


Constant Current Discharge Characteristics Unit:A (25°C,77°C)

F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	4.19	2.39	1.37	0.76	0.320	0.218	0.123	0.066
1.67V	4.11	2.33	1.36	0.75	0.318	0.217	0.123	0.066
1.7V	4.05	2.29	1.35	0.74	0.316	0.215	0.122	0.066
1.75V	3.86	2.18	1.32	0.73	0.311	0.212	0.121	0.065
1.8V	3.47	2.02	1.27	0.69	0.299	0.205	0.118	0.064
1.85V	2.69	1.70	1.17	0.63	0.273	0.191	0.112	0.061


Constant Power Discharge Unit:W (25°C,77°C)

F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	7.17	4.57	2.65	1.44	0.631	0.426	0.242	0.131
1.67V	6.86	4.35	2.63	1.43	0.626	0.425	0.241	0.130
1.7V	6.63	4.20	2.62	1.42	0.622	0.423	0.240	0.130
1.75V	6.06	3.89	2.57	1.40	0.612	0.416	0.237	0.129
1.8V	5.22	3.46	2.48	1.35	0.589	0.402	0.232	0.127
1.85V	4.07	2.90	2.28	1.26	0.543	0.381	0.221	0.122


Trickle (or Float) Design Life

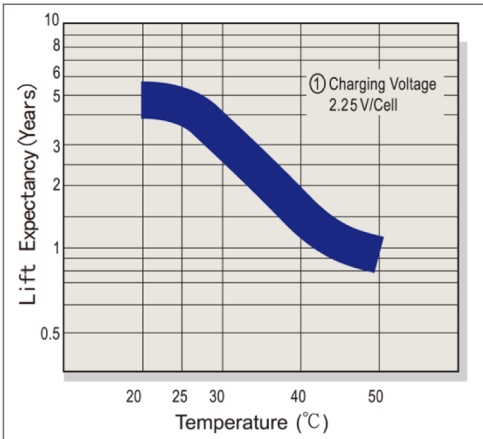


Capacity Retention Characteristic

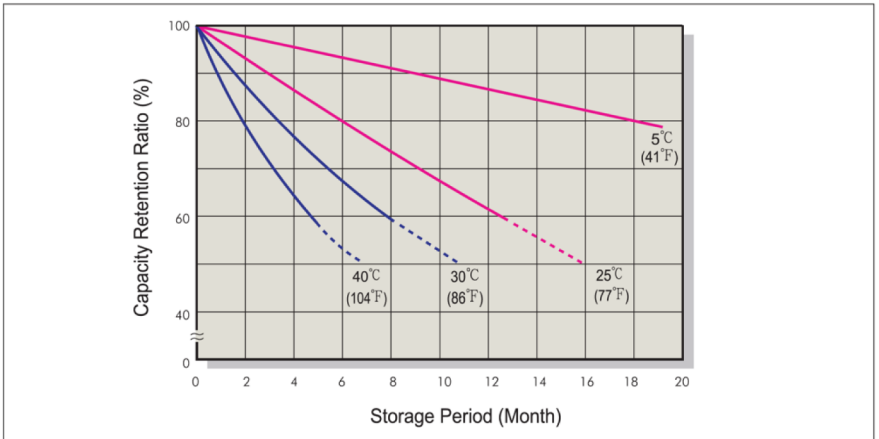


Battery Voltage and Charge Time for Standby Use

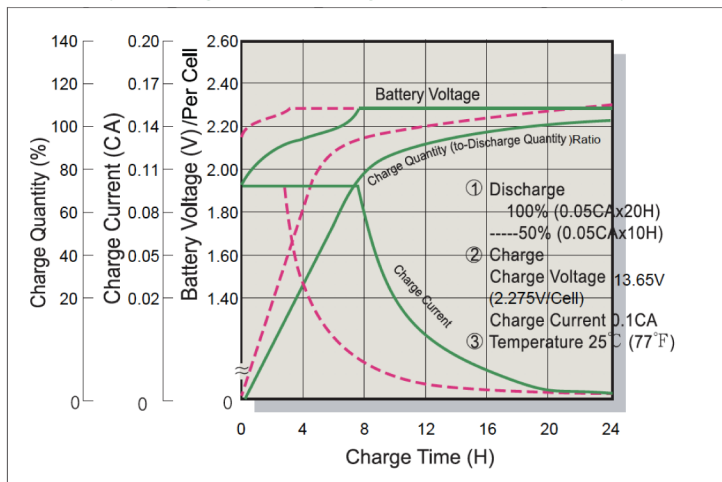


Cycle Service Life

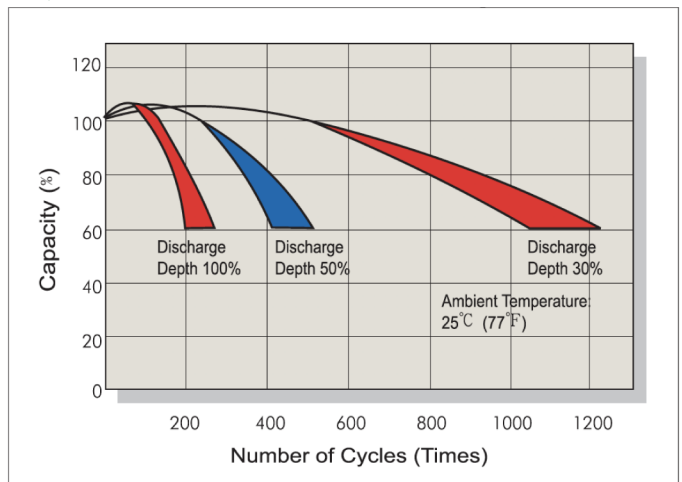

Battery Voltage and Charge Time for Cycle Use

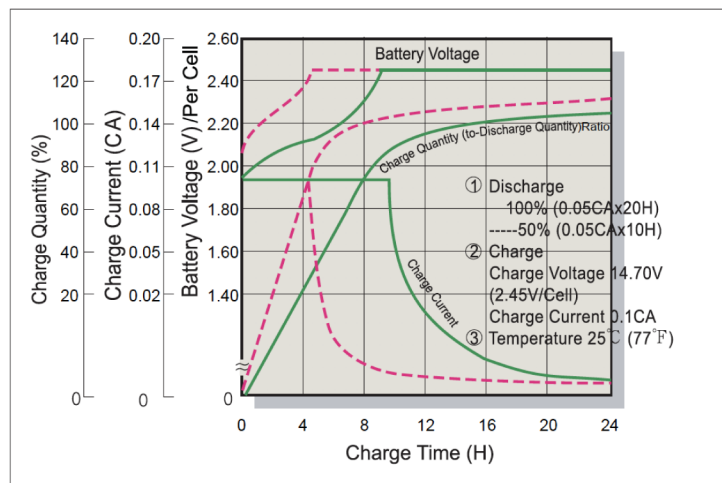

Terminal Voltage (V) and Discharge Time

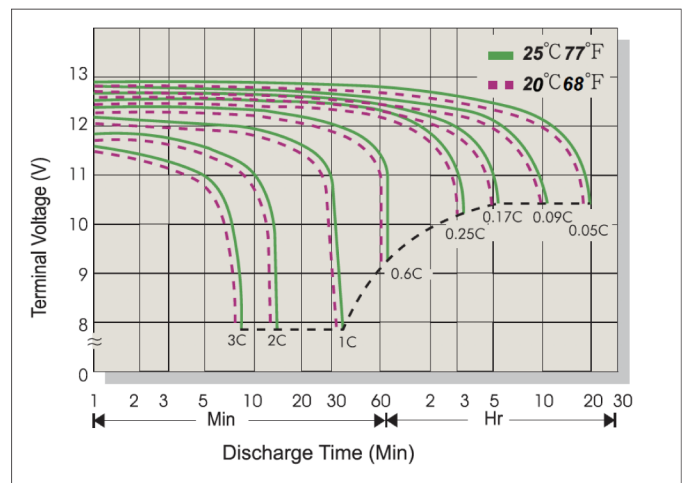

Charging Procedures

Application	Charge Voltage (V/Cell)		Max. Charge Current
	Temperature	Set Point / Allowable Range	
Cycle Use	25°C(77°F)	2.45 / 2.40~2.50	0.3C
Standby	25°C(77°F)	2.275 / 2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.65	1.6
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

Effect of temperature on capacity(20HR)

Temperature	Dependency of Capacity(20HR)
40°C	103%
25°C	100%
0°C	85%
-15°C	65%

Self-discharge Characteristics

Storage Time	Preservation Rate
3 months	91%
6 months	82%
12 months	64%