

## 632026

European Region

European Region

### BRIGHT



- White LED provides 75 lumens of light on high and 23 lumens on low.

### ECONOMICAL



- Useable light for 20 hours between battery changes with Energizer® MAX® batteries
- Lifetime LED never needs replacing

### DURABLE



- Survives 2-metre drop test
- Shatterproof lens
- Approved by global agencies for intrinsically safe lights

### WATER RESISTANT



- Meets IEC 60529 IPX4 standards
- Continues to operate after exposure to splashing water from all directions

Approved by global safety agencies, the Energizer® ATEX Headlight is ideal for work in harsh conditions. The light is water resistant, dustproof and survives a 2 metre drop. Built to take tough conditions on the job, it provides a dependable hands-free lighting solution. Four lighting modes are controlled by 2 easy to operate push button switches. The light pivots to direct the beam where you need it; and the comfortable, adjustable head band stays where you put it, whether on your head or on a hard hat.



- UL/CUL intrinsic safety for hazardous locations Class I Div. 1 Groups A,B,C, & D, Class II Div.1 Groups E,F,&G, and Class III Div.1; T4
- ATEX intrinsically safe flashlight for IM2/II1G Ex ia I/IIC T4
- IECEX intrinsically safe flashlight for Ga Ex ia IIC T4
- 20°C to 40°C ambient operating range.
- CE 0539
- EN60529 ingress protection level IP64.

#### Before Using Your Flashlight:

Please read all instructions and cautionary markings on the package and light


### Product Detail:

- Designation:** Energizer ATEX Headlight
- SAP:** 632026
- Colour:** Orange and Black
- Power Source:** Three "AA"
- IEC:** LR03
- Lamp:** One White High Power LED
- Additional Lamps:** Two Red and one Green LED
- Lamp Life (hr):** Lifetime
- Lamp Output (lumens):** High - 75, Low - 23
- Beam Distance (m):** High -125, Low - 60
- Peak Beam Intensity (cd):** High -3906, Low - 900
- Run Time (h:mm):** High - 20, Low- 66
- Typical Weight:** 230 grams with batteries
- Dimensions (mm):** Light- 79.2 x 28.7 x 53.8  
Battery Pack- 76.2 x 69.9 x 28.7

### Performance:

#### Run Time

Continuous Drain to End of Useable Light (21° C)

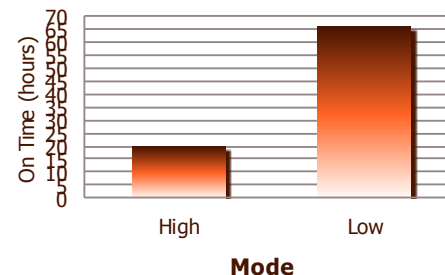

#### Important Notice

This datasheet contains information specific to products manufactured at the time of its publication  
**Contents herein do not constitute a claim or warranty**  
 ©Energizer / All Rights Reserved