

Ø0,1 to Ø2.5 inch

AXXAIR


Drill / Driver:


- **QuiXS** quick change system
- 18V motor
- Lithium-Ion technology
- LED battery charge indicator
- Supplied with two 3Ah 18V batteries, rapid battery charger

Burr-free tube squaring and bevelling machine

- Accurate manual advance (0.1 mm steps)
- Quick blade adjustment, no disassembly required
- Light and compact: 7.1 kg with battery
- Removable support foot
- 30° and 45° **outside bevel** possible with optional tool holder.
- squaring and bevelling in one operation*



Jaws open wide for easy positioning of tube.

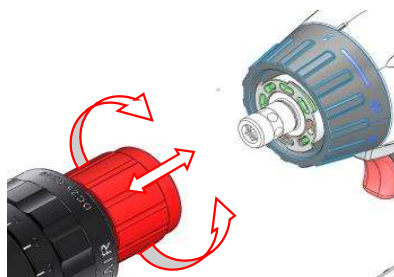

QuiXS: Lets you change the head or fit a chuck in just a few seconds.



Tool adjusted to the diameter of tube to be machined in just a few seconds.


Reference:	Accessories:	Consumables:
DC 65-G2: squaring machine, dia. 0,1 to 2,5 inches diameter with 220V battery charger.	DCM65A-XX: Jaws for diameters between 1 and 2,5 inches for the DC65. DCM65B-XX: Jaws for diameters between 0,1 and 1 inch. for the DC65. DCM625: Spacer for fitting DC25 jaws on a DC65. DC65-P300: 30° bevel tool holder DC65-P450: 45° bevel tool holder	DC-OUT1: Box of 10 blades, TIALN HSS-E . DC-UOUT1: Blade, TIALN HSS-E (single unit) DC-OUT2: Blade mounting screw.

•Bevelling possible over the whole of the machine's range (0,1 to 2,5 inches),

* • If squaring and bevelling, range between 0,8 and 2 inches diameter, max height of bevel 0,1 inch.

MADE IN FRANCE
GLOBAL PROCESS
www.axxair.com

Ø0,1 to Ø2.5 inch

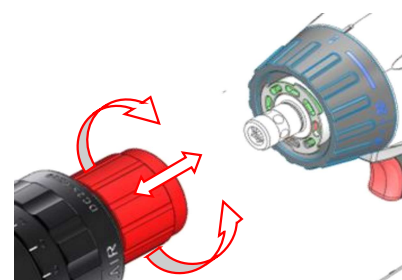

DC25 and DC65 package

AXXAIR offers a set which combines the best in squaring in a single box.

- **3.0Ah 18V** drill driver with all accessories.
- DC25 squaring head
- DC65 squaring head

With the QuiXS system, you can change from one set-up to another in just a few seconds.

DC25: true up tubes with a light, ultra-compact machine.

DC65: **squaring and bevelling** (optional bevelling tool holder) on the bench or directly on the tubes (dismountable foot).

Reference:	Accessories:	Consumables:
DCPACK-G2: DC25 + DC65 pack with 3.0Ah 18V motor and 220V rapid charger.	DCM65A-XX: Jaws for diameters between 1 and 2,5 inch for the DC65. DCM65B-XX: Jaws for diameters between 0,1 and 1 inch for the DC65. DCM625: Spacer for fitting DC25 jaws on a DC65. DC65-P300: 30° bevel tool holder DC65-P450: 45° bevel tool holder DCM25-XX: XX mm diameter jaws for the DC25.	DC-OUT1: Box of 10 blades, TIALN HSS-E . DC-UOUT1: Blade, TIALN HSS-E (single unit) DC-OUT2: Blade mounting screw.




Consumables – DC25 and DC65

DC-OUT1: Box of 10 HSS-E blades, high-performance coating.

DC-UOUT1: HSS-E blades, high-performance coating (single unit).

DC-OUT2: Blade tightening screw.

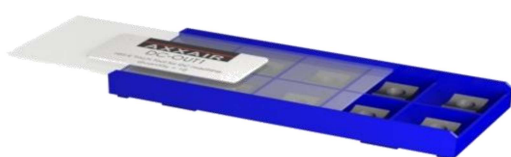

Reversible blade (two cutting edges).

Accessories:

DCM25-XX: Jaws for DC25 machine. Tube diameter = XX.XX mm (3 to 1 inch).

DC25

DCM65A-XX: Jaws for DC65 machine. Tube diameter between 1 and 2,5 inches.

DCM65B-XX: Jaws for DC65 machine. Tube diameter between 0,1 and 1 inch.

DC65

Stainless steel jaws, so as not to pollute the tube. A set of jaws is necessary for each outside diameter of tube to be machined.

DCM6525: Spacer for fitting DC25 jaws on a DC65

DC65

DC65-P450: Tool holder for bevelling the outer edge at 45° *

DC65

DC65-P300: Tool holder for bevelling the outer edge at 30° *

DC65



- Tool holders are supplied without blades.
- bevelling possible over the whole of the machine's range (0,1 to 2,5 inches),
- If squaring and bevelling, range between 20 and 53 mm diameter, max. height of bevel 0,1 inch.