

IB061170

INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, Ø6,5mm 60long, Flush, Sn: 1.5, 10-30V DC, NPN
NO, Connector M8 3pin, IP67, Stainless steel 1.4305



MECHANICAL FEATURES

| | |
|------------------------------------------|------------------------|
| | IV000197 |
| Active area material of sensor | PBT |
| Ambient temperature | -25 °C ... 70 °C |
| Degree of protection (IP) | IP67 |
| Housing design | Cylinder plain |
| Housing material | Stainless steel 1.4305 |
| Mechanical mounting condition for sensor | Flush |
| Pressure-proof | - |
| Sensor diameter | 6.5 mm |
| Sensor length | 60 mm |

ELECTRICAL FEATURES

| | |
|-----------------------------------|-----------------------|
| Cascadable | - |
| Correction factor (aluminum) | 0.3 |
| Correction factor (brass) | 0.4 |
| Correction factor (copper) | 0.2 |
| Correction factor (St37) | 1 |
| Correction factor (stainl. steel) | 0.7 |
| Hysteresis | 15 % |
| No-load current | 15 mA |
| Number of pins | 3 |
| Rated switching current | 200 mA |
| Relative repeat accuracy | 10 % |
| Reverse polarity protection | + |
| Short-circuit protection | + |
| Suitable for safety functions | - |
| Supply voltage | 10 V ... 30 V |
| Switching distance | 1.5 mm |
| Switching frequency | 1000 Hz |
| Type of electrical connection | Connector M8 |
| Type of switching function | Normally open contact |
| Type of switching output | NPN |
| Voltage drop | 2 V |

ELECTRICAL FEATURES

| | |
|------------------------------------------------|----|
| Voltage type | DC |
| With LED display | + |
| With monitoring function of downstream devices | - |


Other

| | |
|----------------------|-----------------------|
| Packaging dimensions | 100mm x 0.0mm x 120mm |
| Shipping weight | 0.01kg |
| Tariff code | 85365019 |

Classification

| | |
|-------------------|----------|
| ipf product group | 203 |
| eClass 8.0 | 27270101 |
| eClass 9.0 | 27270101 |
| eClass 9.1 | 27270101 |
| ETIM-5.0 | EC002714 |
| ETIM-6.0 | EC002714 |
| ETIM-7.0 | EC002714 |

Connection

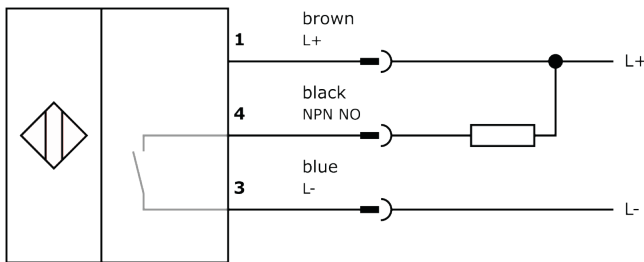

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.