

IB08E067

INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, M8x1 30long, Flush, Sn: 2, 12-30V DC, 100°C, PNP
NO, Cable connector M8 3pin 0.6m PTFE, IP67, Stainless steel



MECHANICAL FEATURES

Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 100 °C
Cable length	0.6 m
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing material	Stainless steel
Increased ambient temperatures > 80°C	+
Material of cable sheath	PTFE
Mechanical mounting condition for sensor	Flush
Number of cores	3
Pressure-proof	-
Sensor length	30 mm
Thread length	30 mm
Thread pitch	1 mm
Thread size, metric	8
Wire cross section	0.14 mm ²

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	20 %
No-load current	12 mA
Norm measuring plate	8x8x1
Number of pins	3
Operating voltage	12 V ... 30 V
Rated switching current	50 mA
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	12 V ... 30 V
Switching distance	2 mm
Switching frequency	5000 Hz
Type of electrical connection	Cable connector M8
Type of switching function	Normally open contact

ELECTRICAL FEATURES

Type of switching output	PNP
Voltage drop	3 V
Voltage type	DC
With monitoring function of downstream devices	-


Other

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.04kg
Tariff code	85365019


Classification

ipf product group	700
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

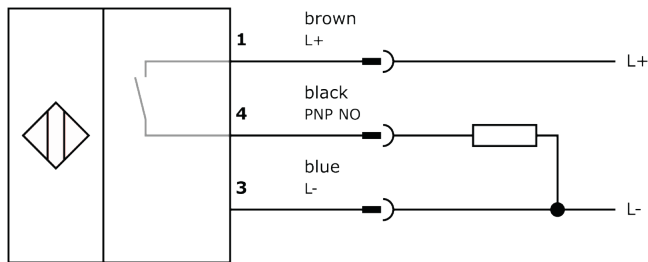

Dimensional drawing

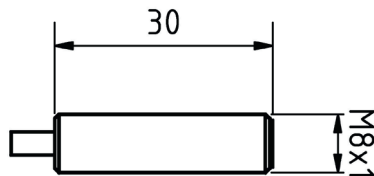

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Any software, drivers or IOOD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.
LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.