

IB120026

INDUCTIVE SENSORS • DISTANCE MEASUREMENT

sensor inductive, analog, M12x1 60long, Flush, Sn: 0-6, 18-30V DC, 0-10V/4-20mA, Connector M12 PUR (Polyurethane), IP67, Brass Chrome-plated



MECHANICAL FEATURES

Active area material of sensor	PBTP
Ambient temperature	-25 °C ... 70 °C
Atmospheric-change resistant (temperature cycle)	-
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
High-pressure-proof sensors	-
Housing coating	Chrome-plated
Housing material	Brass
Increased ambient temperatures > 80°C	-
Material of cable sheath	PUR (Polyurethane)
Mechanical mounting condition for sensor	Flush
Sensor length	60 mm
Thread pitch	1 mm
Thread size, metric	12

ELECTRICAL FEATURES

Distance measuring sensors	+
Magnetic field resistant	-
Measuring range length	0 mm ... 6 mm
No-load current	10 mA
Operating voltage	18 V ... 30 V
Reverse polarity protection	+
Short-circuit protection	+
Supply voltage	18 V ... 30 V
Type of analog output	0 V ... 10 V / 4 mA ... 20 mA
Type of electrical connection	Connector M12
Voltage type	DC

OTHER FEATURES

Devices for hose mounting	-
Feeding technology	-
Harsh environmental conditions	-
Hygienic and wet area	-

OTHER FEATURES

Metallic sensor surface	-
Oil and cooling lubricants	-
Ring-shaped sensors	-
Welding-proof sensors	-


Other

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.04kg
Tariff code	85365019


Classification

ipf product group	209
eClass 8.0	27270802
eClass 9.0	27270802
eClass 9.1	27270802
ETIM-5.0	EC001818
ETIM-6.0	EC001818
ETIM-7.0	EC001818

Connection

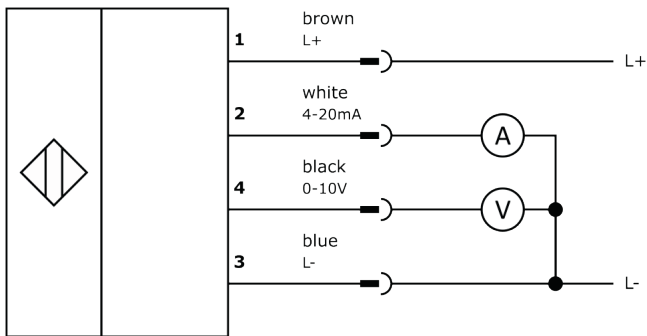

Dimensional drawing

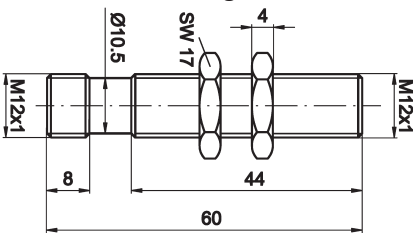

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.