


## SS896084

### FLOW SENSORS • SENSORS FOR WATER

sensor flow, Calorimetric, G1/4 inch, Anschluss an Verstärker, Pressure resistance 100bar

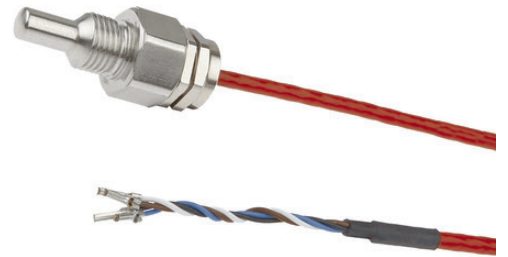

#### MECHANICAL FEATURES

Cable length	2 m
Design	Cylinder, screw-thread
Measuring range of flow velocity with water	0.01 m/s ... 1.5 m/s
Medium temperature	10 °C ... 120 °C
Pressure resistance	100 bar
Sensing element material	Stainless steel 1.4571
Thread length	25 mm
Type of process connection	G1/4 inch

#### ELECTRICAL FEATURES

Adjustable responding value for flow for liquids	0.03 m/s ... 3 m/s
Connection to amplifier	+
Measuring principle of flow	Calorimetric
Pressure resistance of measuring head	100 bar
Readiness delay	15 ms
Turn-off delay	15 s

#### OTHER FEATURES

For hydraulic applications	+
Suitable for gases	-
Suitable for liquids	-


#### Other

Packaging dimensions	124.0mm x 28.0mm x 149.0mm
Shipping weight	0.15kg
Tariff code	90261021

## Classification

ipf product group	300
eClass 8.0	27371815
eClass 9.0	27371815
eClass 9.1	27371815
ETIM-5.0	EC002580
ETIM-6.0	EC002580
ETIM-7.0	EC002580

## Connection

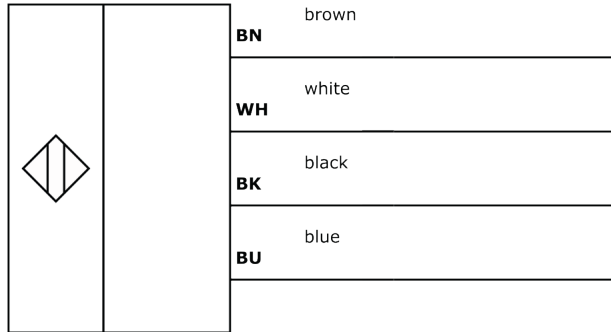

## Dimensional drawing

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: [www.ipf-electronic.com](http://www.ipf-electronic.com)

## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.