

## VD58C269

### ROTARY ENCODERS • ENCODERS

A rotary encoder is a device that converts a rotary motion into a digital output signal, which can be processed on a subsequent evaluation electronics. All of our encoders operate according to the principle of optical scanning. Inside the device there is a pulse disc on which is – depending on the encoder - a unique (absolute) or repetitive (incremental) line graduation, which is scanned by an optical system. The turning of the encoder shaft causes rotation of the pulse disc, which results in a corresponding sampling signal of the optical system. This is finally implemented by an integrated electronics in encoder-specific output signals (e.g. multi-turn, RS422 etc.). For professional installation in many applications, shaft couplings or resilient bases for mounting brackets or flanges are used. In addition, the encoder shaft can be equipped with measuring wheels or pinions in various designs and sizes. Typical applications include the angle measurement on bending machines, length measuring of belt systems or speed measurement on winding systems.

#### MECHANICAL FEATURES

Ambient temperature	-25 °C ... 85 °C
Degree of protection (IP)	IP54
Encoder size	58
For damp environments	-
Max. rotation speed	6000 UpM
Moment of inertia	14.5 gcm <sup>2</sup>
Sensor diameter	58 mm
Sensor length	52 mm
Shaft diameter	12 mm ... 12 mm
Shock resistance, acceleration	200 g
Shock resistance, pulse time	6 ms
Torque	0.03 Nm
Type of encoder shaft	Hollow shaft
Vibration resistance, acceleration	10 g
Vibration resistance, frequency	2000 Hz
Weight	0.25 kg
With hollow shaft	+
With shaft sealing ring	-

#### ELECTRICAL FEATURES

Encoder signal outputs	A+B+0
Impulse rate per revolution	5000 ... 5000
Max. no. of pulses	5000
Max. output current	20 A
Max. output frequency	150000 Hz
No-load current	30 mA
Number of pins	12
Positioning of cable feed	IV001908
Programmable	-
Reverse polarity protection	-
Shaft length	52
Short-circuit protection	+
Suitable for absolute value detection	-

## ELECTRICAL FEATURES

Supply voltage	4.75 V ... 30 V
Track A inverted	+
Type of electrical connection	Connector M23
Voltage type	DC

## OTHER FEATURES

Air humidity	95 %
Relative air humidity	95 %
Single-turn encoder	+


## Other

Packaging dimensions	138.0mm x 95.0mm x 210mm
Shipping weight	0.37kg
Tariff code	90318020

## Classification

ipf product group	700
eClass 8.0	27270590
eClass 9.0	27270590
eClass 9.1	27270590
ETIM-5.0	EC001486
ETIM-6.0	EC001486
ETIM-7.0	EC001486

## Connection

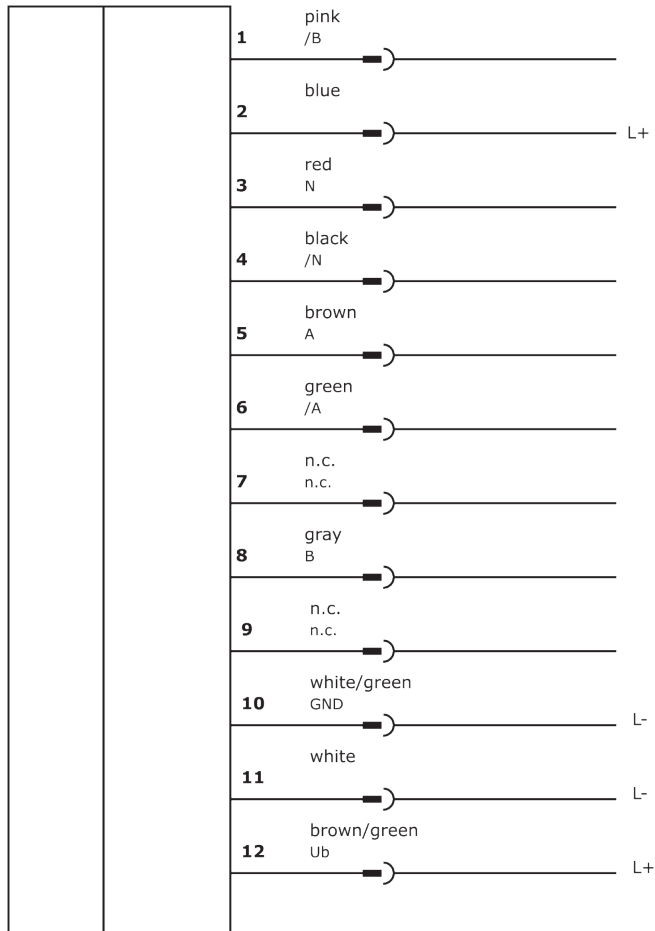

## Dimensional drawing

### Installation



Mounting / installation may only be carried out by a qualified electrician!

### Disposal



### Software

Please download the software or driver required for operating your new device on our homepage: [www.ipf.de](http://www.ipf.de)

### Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.