

4US SOLAR SUBMERSIBLE WELL PUMP



DC Solar Controller



SS connect



SS oil cylinder



Copper connect



Copper oil cylinder



SS impeller




Bearing

TECHNICAL DATA

Model	Voltage (V)	Power (W)	VMP (V)	VOC (V)	Q.Max (m³/h)	H.Max (M)	Outlet (Inch)
1 4US500-36/5.2B	48	500	48-96	<100	5.2	36	1.25"/2"
2 4US550-45/5.2B	48	550	48-96	<100	5.2	45	1.25"/2"
3 4US650-54/5.2B	48	650	48-96	<100	5.2	54	1.25"/2"
4 4US650-54/5.2C	72	650	72-144	<150	5.2	51	1.25"/2"
5 4US750-67/5.2B	48	750	48-96	<100	5.2	67	1.25"/2"
6 4US750-67/5.2C	72	750	72-144	<150	5.2	67	1.25"/2"
7 4US900-80/5.2C	72	900	72-144	<150	5.2	72	1.25"/2"
8 4US1100-101/5.2C	72	1100	72-144	<150	5.2	101	1.25"/2"
9 4US1100-101/5.2D	96	1100	96-192	<200	5.2	101	1.25"/2"
10 4US1300-120/5.2D	96	1300	96-192	<200	5.2	120	1.25"/2"
11 4US1400-132/5.2E	110	1400	110-192	<200	5.2	132	1.25"/2"
12 4US1500-146/5.2E	110	1500	110-192	<200	5.2	146	1.25"/2"

PERFORMANCE CURVE

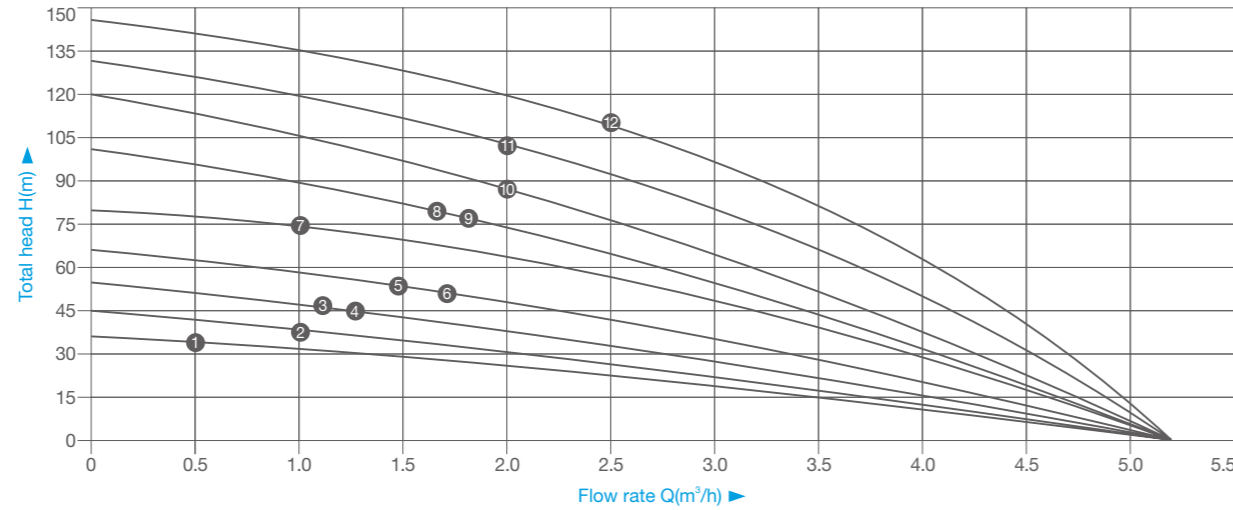

4US SOLAR SUBMERSIBLE WELL PUMP



DC Solar Controller



SS connect



SS oil cylinder



Copper connect



Copper oil cylinder



SS impeller



Bearing

TECHNICAL DATA

Model	Voltage (V)	Power (W)	VMP (V)	VOC (V)	Q.Max (m³/h)	H.Max (M)	Outlet (Inch)
1 4US550-35/7.5B	48	550	48-96	<100	7.5	35	1.25"/2"
2 4US750-45/7.5B	48	750	48-96	<100	7.5	45	1.25"/2"
3 4US1100-60/7.5C	72	1100	72-144	<150	7.5	60	1.25"/2"
4 4US1300-80/7.5D	96	1300	96-192	<200	7.5	80	1.25"/2"
5 4US1300-95/7.5D	96	1300	96-192	<200	7.5	95	1.25"/2"
6 4US1400-105/7.5E	110	1400	110-192	<200	7.5	105	1.25"/2"
7 4US1500-115/7.5E	110	1500	110-192	<200	7.5	115	1.25"/2"

PERFORMANCE CURVE

