

ASTERION lead-acid batteries of the CGD series are manufactured according to AGM technology (electrolyte absorbed in a fiberglass separator).

As part of the active mass, a carbon addition in the form of graphene is used what makes ASTERION CGD batteries resistant to deep discharges and high temperature stability under adverse operating conditions. This series also features an increased number of charge/discharge cycles and duration of operation in heavy-duty systems based on renewable energy sources.

The batteries are designed to operate both in buffer and cyclic modes. Recommended for use in autonomous power systems, as well as in conjunction with systems based on alternative energy sources.



### Battery construction

Element	Positive plate	Negative plate	Case	Lid	Valve	Terminal	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS		Rubber	Copper	Fiberglass	Acid

### Specifications

Nominal voltage.....	12 V
Cell.....	6
Design life.....	15 years
Nominal capacity (25°C)	
10 hours rate (1,2 A; 1,8 V/cell).....	12 Ah
5 hours rate (2,2 A; 1,75 V/cell).....	11 Ah
1 hours rate (8,23 A; 1,65 V/cell).....	8,23 Ah
Self-discharge.....	3% capacity per month 20°C
Internal resistance (25°C).....	15 mΩ

### Operating temperature range

Discharge.....	-20+60°C
Charge.....	-10+60°C
Storage.....	-20+60°C
Maximum discharge current (25°C).....	180A (5sec)
Cycle mode (2,35±2,4 V/cell)	
Max.charge current.....	6 A
Temperature correction factor.....	30 mV/°C
Standby mode (2,25±2,3 V/cell)	
Temperature correction factor.....	20 mV/°C

### Application


- Uninterruptible power supplies
- Communication and telecommunication systems
- Solar and wind power systems
- Autonomous power supply systems
- Other energy storage systems

### Performance & characteristics

- The presence of carbon in the form of graphene in the composition of the paste;
- Long service life;
- Deep discharge stability;
- Temperature stability of the battery;
- Excellent performance at low and high ambient temperatures;
- Unsurpassed number of charge/discharge cycles;
- Charge with high currents with minimal loss of capacity;
- A universal solution for any battery life.

### Dimensions (±2mm)

Length, mm.....	151
Width, mm.....	98
Height, mm.....	95
Height over terminals, mm.....	98
Weight (±3%), kg.....	3,9

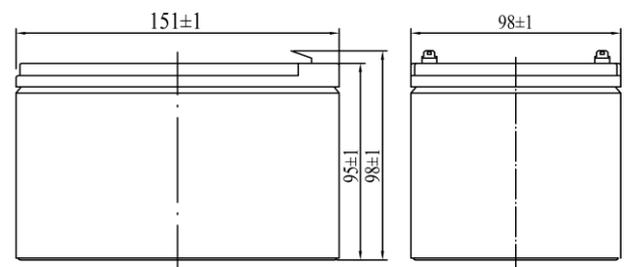




### Layout

D



### Terminal type

F2



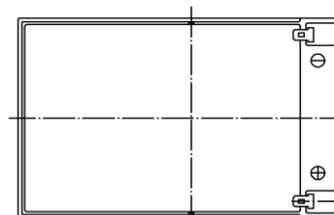



**Discharge Constant Current, A ( 25°C)**

V/cell	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
1,60	25,0	13,4	10,0	8,30	4,90	3,35	2,25	1,48	1,25
1,65	23,6	12,9	9,79	8,23	4,85	3,17	2,24	1,47	1,25
1,70	22,2	11,7	9,35	8,18	4,80	3,00	2,22	1,46	1,24
1,75	21,2	11,1	9,08	8,07	4,74	2,93	2,21	1,46	1,23
1,80	18,2	10,3	8,73	7,95	4,70	2,86	2,02	1,36	1,20

**Discharge Constant Power, W/cell ( 25°C)**

V/cell	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
1,60	50,8	29,2	21,9	18,3	10,0	6,42	4,28	2,68	2,37
1,65	50,1	29,1	21,2	17,2	9,62	6,38	4,23	2,63	2,35
1,70	49,4	26,9	19,8	16,3	9,58	6,33	4,13	2,62	2,33
1,75	47,6	26,2	19,3	15,8	9,45	6,27	4,12	2,60	2,32
1,80	44,4	25,8	18,8	15,3	9,17	5,87	4,08	2,57	2,30

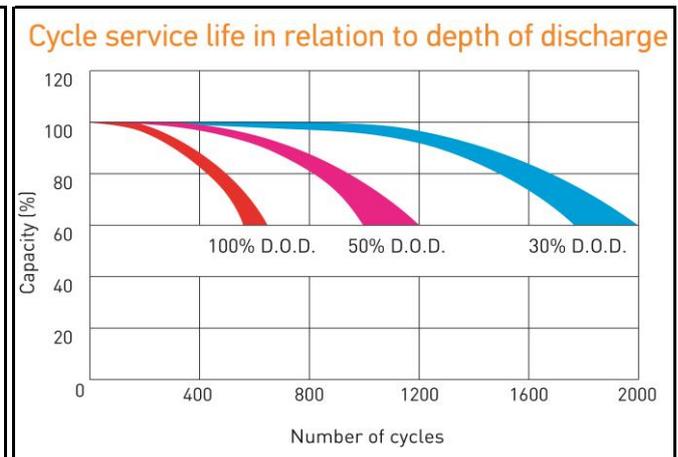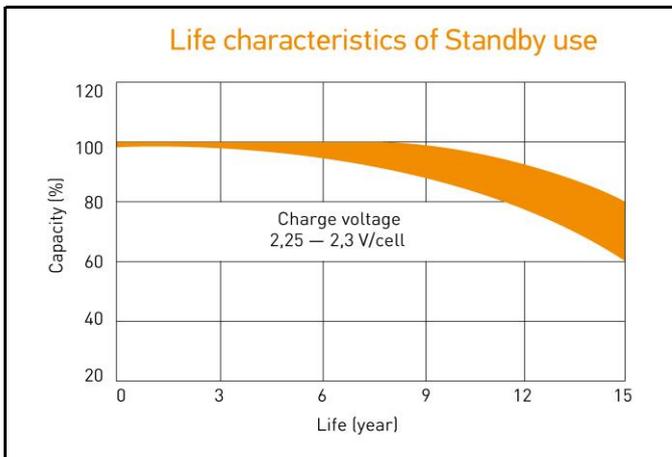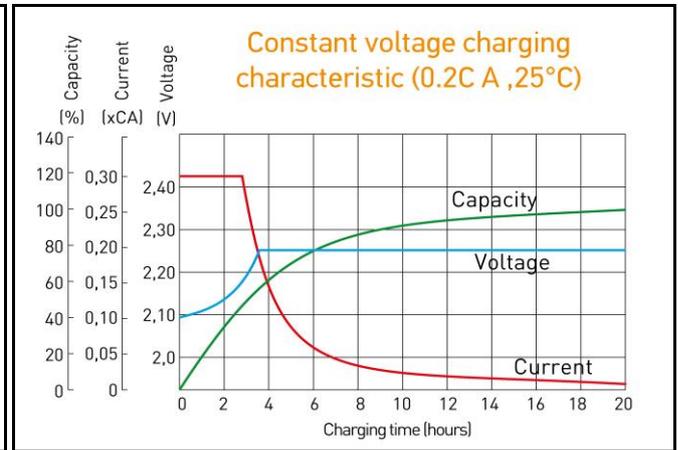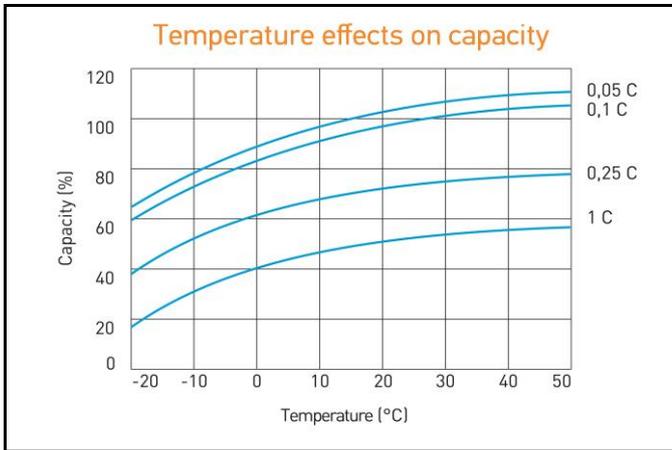

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE