


STANDARD QUICK COUPLING ISO 7241 A – FEMALE / MALE / SET

Interchangeability	ISO 7241-A
Shut-off System	Poppet Valve
Material	Carbon Steel
Thread Size	BSP
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Heat Treatment	Male nipple
Connection System	Pulling back the sleeve
Disconnection System	Pulling back the sleeve
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Applications	Tractors, Agricultural machines and semi-trailers


STANDARD QUICK COUPLING - FEMALE - ISO 7241-A

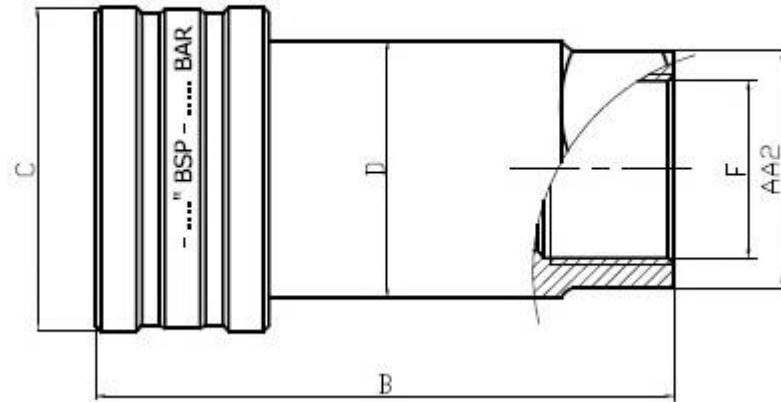

Technical Specifications

Thread Size F	Working Pressure Bar	Dimensions			
		AA2	B	C	D
1/4" BSP	330	20	55	29.50	22
3/8" BSP	320	25	60.50	34.50	28
1/2" BSP	300	27	68	38	30
3/4" BSP	270	34	82.50	47	38
1" BSP	240	41	100	55.50	44.50


STANDARD QUICK COUPLING - MALE - ISO 7241-A

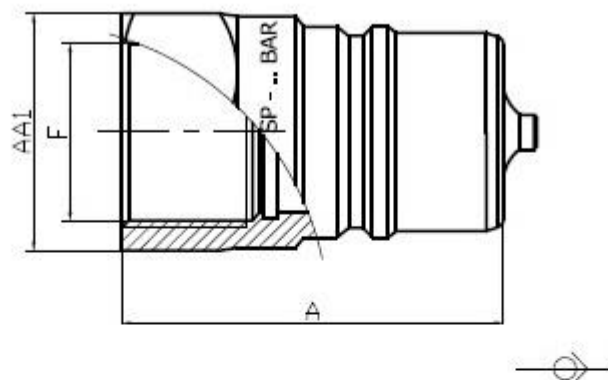

Technical Specifications

Thread Size F	Working Pressure Bar	Dimensions	
		A	AA1
1/4" BSP	330	37	19
3/8" BSP	320	40	22
1/2" BSP	300	46	27
3/4" BSP	270	55	36
1" BSP	240	66	41

STANDARD QUICK COUPLING – SET - ISO 7241-A

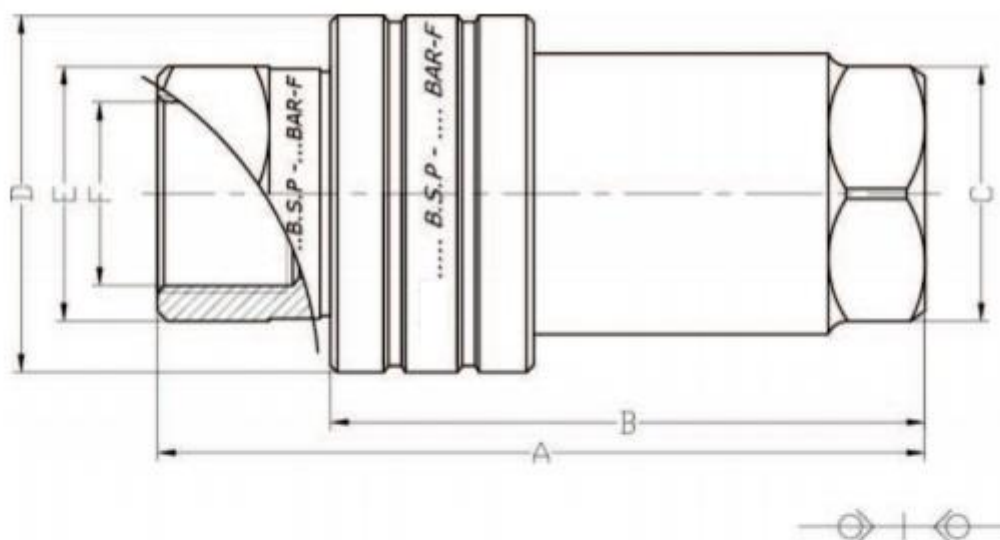

Technical Specifications

Thread Size F	Working Pressure Bar	Dimensions				
		A	B	C	D	E
1/4" BSP	330	74	54	20	30	19
3/8" BSP	320	80,50	60,50	25	35	22
1/2" BSP	300	92	68	27	38	27
3/4" BSP	270	110,50	82,50	34	47	36
1" BSP	240	132,50	100	41	56	41