


HYDRAULIC DOUBLE PILOT OPERATED CHECK VALVES

Material	Carbon Steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Heat Treatment	Internal parts
Applications	Lifting equipments, cranes, platforms, concrete mixers, agricultural machines.

HYDRAULIC DOUBLE PILOT OPERATED CHECK VALVES 3/8" BSP

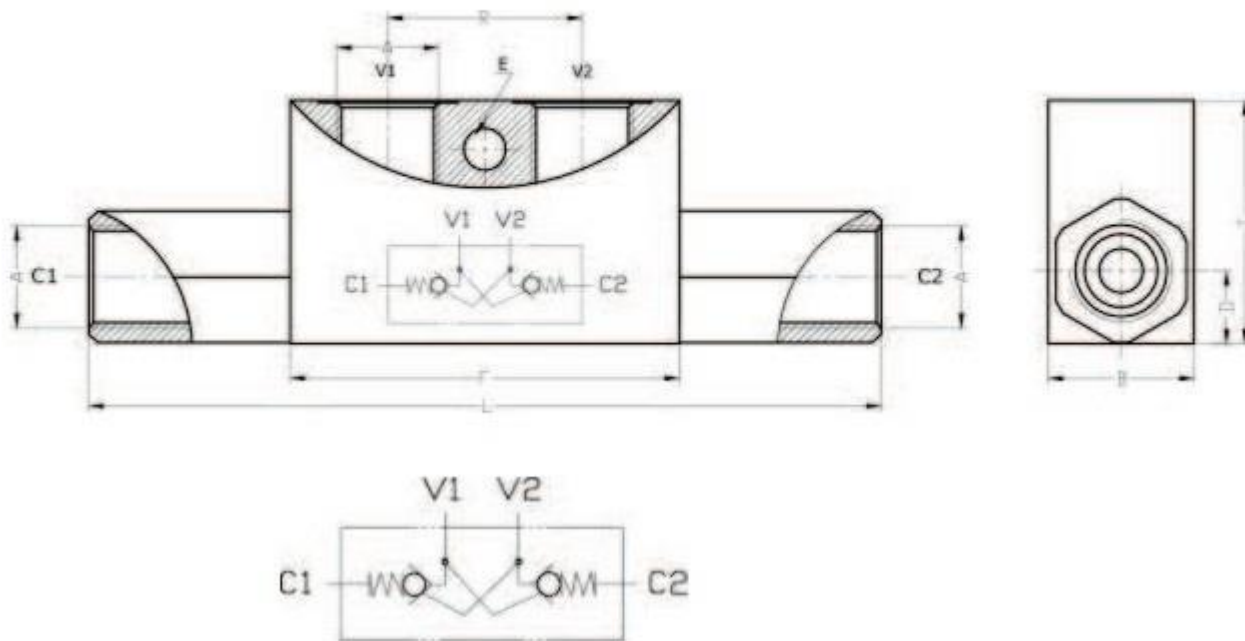


Technical Specifications

Code	Thread Size A	Working Pressure Bar	Dimensions - mm										
			B	C	D	E	F	G	L	L1	R	T	RA
T14-1-0002	3/8" BSP	380	30	-	13	7	65	-	128	-	33	40	-

		Flow Rate / Pressure Drop Table		
Code	Thread Size	Pressure Drop - Δp		
		3 Bar	4 Bar	5 Bar
T14-1-0002	3/8" BSP	18	25	32

HYDRAULIC DOUBLE PILOT OPERATED CHECK VALVES_PROGRESSIVE RING+NUT_M18x1.5-RA12

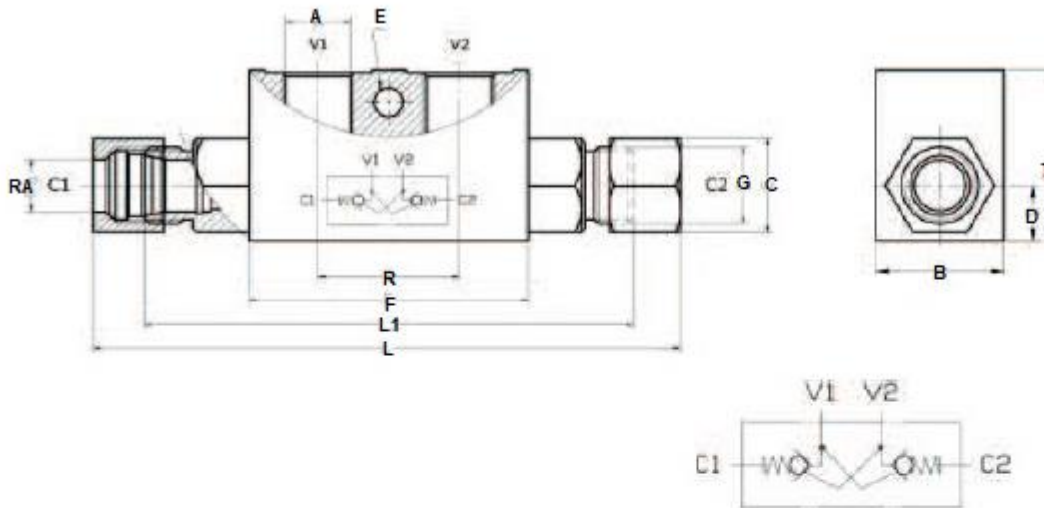

Technical Specifications

Code	Thread Size A	Working Pressure Bar	Dimensions - mm										
			B	C	D	E	F	G	L	L1	R	T	RA
T14-1-0003	M18X1,5-RA12	380	30	22	13	7	65	M18x1.5	138	-	33	40	12

Flow Rate / Pressure Drop Table

Code	Thread Size	Pressure Drop - Δp		
		3 Bar	4 Bar	5 Bar
		T14-1-0003	M18X1,5-RA12	18