


## Data Sheet

## Primary Silver

## V 28 PX

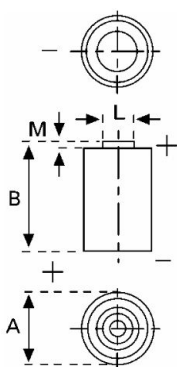

**Type Number**..... 4028  
**Designation IEC**..... 4 SR 44  
**System**..... Silver oxide/ Zinc /  
 KOH - Electrolyte

**Nominal Voltage**..... 6,2 V  
**Typical Capacity C**..... 145 mAh  
 Load 20 kOhm, at 20°C down to 3.6 V

**Weight (approx.)**..... 11,1 g  
**Volume**..... 3,3 ccm  
**Coding**..... Manufacturing Quarter/Year  
 by Letter Code

**Temperature Ranges**  
 Storage..... min max.  
 -10°C 65°C  
 Discharge..... -10°C 65°C

**Dimensions**  
 Diameter..... min max.  
 12 13  
 Height (A/B)..... 23,9 25,2

**Segment**..... Photo/High Drain

**Main Applications**..... Photo  
 Electronic

### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage: 3.6V
Continuous 24h/d, 7d/w Current [ $\mu$ A]	20000 $\Omega$  310	Time: 495 h Capacity [mAh]: 145 Energy [MWh]: 855

All Data contained herein is for single cells  
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration