



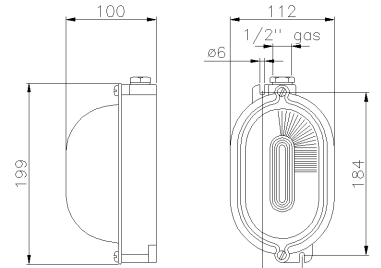

**SERIES RINO
FIXTURE
CODE 831071**



Datasheet

Specifications

Net Weight	798 G
Shock resistance	IK07 according to IEC/EN 62262
Frequency	0/50/60Hz
Protection degree	IP66
Rated operating voltage	230V CA-CC
Manufacturing material	Aluminium alloy (EN 46100)
Insulation Class	I
Lamp power	MAX 60W(Ta+50°C)/40W(Ta+70°C)
Lampholder type	E27
Dimensions	199X112 mm
Hole type	M20
Optics	Symmetrical
Diffuser type	TRANSPARENT PRISMATIC GLASS
Min. Amb. Temp.	-40°C
Max. Amb. Temp.	+70°C
Surface finishing	PAINTED GREY RAL7035

Warranties, Reference Standards and Directives

Warranty	1 years
Certification and approval marks	UKR, CB DEKRA, UKCA, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD), Reg. EU 2019/2020 (EcoDesign), 2009/125/EC (ERP)
Reference Standards	EN 60598-1:2015/AC:2016, EN 60598 1:2015/AC:2015, EN 60598-1:2015/AC:2017, EN 60598-2-1:1989, EN 60598-1:2015, EN 63000:2018, EN 60598-1:2015/A1:2018



The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.