

KDE4341S-B2

43" Full HD



Features


43" Full HD professional large-format display with USB media playback

The 4341S is a professional digital signage display housed in a slim frame, offering 18/7 playback and landscape orientation.

This Full HD, fanless IPS display ensures excellent viewing from any angle, high brightness, and exceptional color clarity. With the built-in media player, you can play your favorite music and display your best videos, photos, and images directly on the screen.

Dimensions

Units:mm

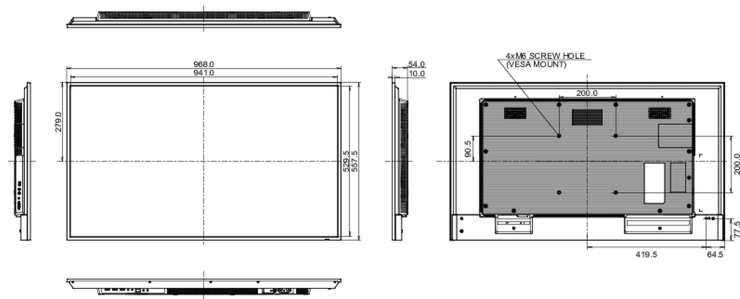

Specifications

	KDE4341S-B2
Screen Features	
Screen Size	42.5", 108cm
Diagonal	108cm
Panel	IPS, haze 1%
Resolution	1920 x 1080 (2.1 megapixel Full HD)
Aspect Ratio	16:9
Panel Brightness	350 cd/m²
Static Contrast	1200:1
Response time (GTG)	8ms
Viewing Area	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Color support	(NTSC 72%)
Horizontal Sync	30 - 83kHz
Viewable area W x H	940.9 x 529.3mm, 37 x 20.8"
Frame width	14mm, 14mm, 14mm
Pixel Arrangi	Pixel Pitch
Interfaces / Connections / Controls	
Analog signal input	VGA x1 (max. 1920x1080 @60Hz)
Digital signal input	HDMI x3 (v2.0, max. 1920x1080 @60Hz)
Audio input	Mini jack x1
Monitor control input	RS-232c x1
	RJ45 (LAN) x1
	IR x1
Audio output	RCA (Left/Right) x1
	Speaker 2 x 10W
Monitor control output	RS-232c x1
	IR loop x1
HDCP	2.2
USB Ports	x1 (2.0, FW update support)
Features	
Media Playback	Yes
Input	
Control Buttons	Power
	picture (picture format, colour temp., noise reduction, dynamic contrast, gamma, brightness, black level, colour, contrast, hue, sharpness, RGB range, reset),
	Sound (treble, bass, balance, speaker, audio output, reset), general settings 1
	(menu languages, clock, schedule, HDMI CEC link, HDMI modes, communication
	setting), screen (auto adjust, clock, phase, H. position, V. position, reset), general
	settings 2 (auto power off, network standby, power management, auto signal
	detection, auto play, local KB lock, RC lock, monitor ID, LED, pixel shift,
	information, factory reset)
User controls	
Mechanical	
Fanless design	Yes
Operating temperature range	0°C - 40°C
Storage temperature range	- 20°C - 60°C
MTBF	50000 hours (excluding backlight)
Power Management	
Power supply	AC 100 - 240V, 50/60Hz
Power Consumption	53W typical, 0.5W stand by, 0.3W off mode
Dimensions / Weight	
Product dimensions WxHxD	968 x 557.5 x 54mm
Box dimensions W x H x D	1075 x 683 x 127mm
Weight (excluding box)	8.4kg
EAN code	4948570123513