


ComBi-line machines can quickly brew large quantities of fresh filter coffee. A ComBi-line set-up consists of a brewing unit with either one or two containers (40 litre).

The user-friendly ComBi-line can be placed on a buffet or counter, or used in combination with a serving trolley.

## BENEFITS



### CAPACITIVE TOUCH USER INTERFACE

- + Coffee dosing advice
- + Easy operator and service menu
- + Programmable timers
- + Day and total counters



CB 1X40 L



CB 1X40 R



### CNE CONTAINERS

- + LED lighting in container
- + No-drip tap
- + Transportable and stackable
- + Improved container heating



- + Tap for different labels; coffee, tea or hot water



- + On-screen brewing process
- + Easy on-screen instructions
- + Display your private label



- + Raised base plate. Easy when using large thermos jugs.

## OPTIONS



- + Container tube with tap
- + S-swivelarm
- + Tap protection



- + For making tea in a container, place the special tea filter with filler pipe.







| MODEL                   | 40 L    |
|-------------------------|---------|
| Article number 2 x 40   | 1007173 |
| Article number 1 x 40 L | 1007175 |
| Article number 1 x 40 R | 1007174 |

| CAPACITY COFFEE SYSTEM        |                         |
|-------------------------------|-------------------------|
| Brew time (water dosing time) | approx. 14 min./40 Ltr. |
| Hour capacity (water volume)  | 180 Ltr.                |
| Buffer stock 2 x 40           | 80 Ltr.                 |
| Buffer stock 1 x 40 L/R       | 40 Ltr.                 |
| Filter paper                  | Ø280/635                |

| ELECTRICAL SYSTEM                |                             |
|----------------------------------|-----------------------------|
| Electrical connection 2 x 40     | 3N~380-415V/ 50-60Hz/18375W |
| Electrical connection 1 x 40 L/R | 3N~380-415V/ 50-60Hz/18225W |

| CONTAINER             |                            |
|-----------------------|----------------------------|
| Contents              | CN40e                      |
| Electrical connection | 1N~ 220-240V/ 50-60Hz/150W |

| DIMENSIONS | CB 1x40 L | CB 1x40 R | CB 2x40 |
|------------|-----------|-----------|---------|
| A =        | 765       | 765       | 1235    |
| B =        | 805       | 805       | 1320    |
| C =        | 465       | 465       | 465     |
| D =        | 685       | 685       | 685     |
| E =        | 975       | 975       | 975     |
| F =        | 845       | 845       | 840     |
| G =        | 835       | 835       | 833     |
| H =        | 180       | 180       | 155     |
| I =        | 115       | 115       | 590     |
| J =        | 150       | 150       | 625     |
| K =        | 195       | 195       | 670     |
| L =        | 32        | 32        | 32      |
| M =        | 27        | 27        | 27      |
| N =        | 32        | 32        | 32      |

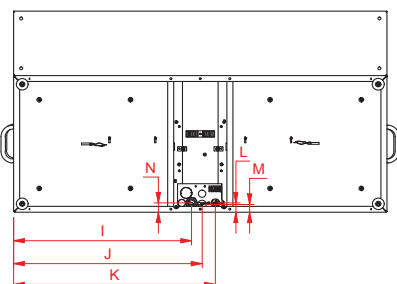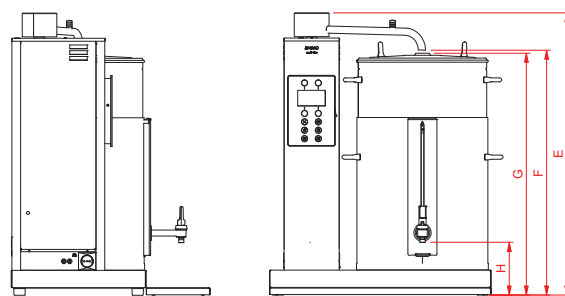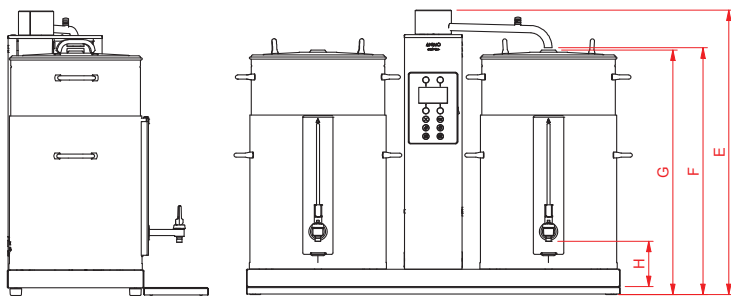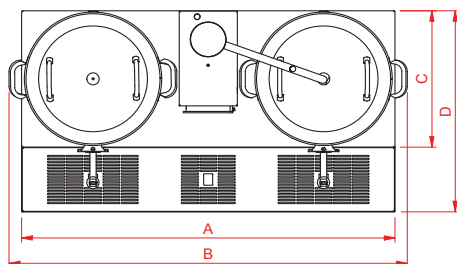

**SAFETY FIRST**

+ CB Certification (TÜV)