## **AD-850m4QT**

#### Overview

Frequency Band UHF 860 - 960 MHz

Chip

Impinj Monza 4QT

**Antenna Dimensions** 

Ø 10 mm / 0.4 in

International Standard ISO/IEC 18000-63 Type C

**Industry Segments** 

Healthcare Automotive


**Applications** 

Asset tracking

Pharmaceutical and Healthcare

RoHs

EU Directive 2011/65/EU and 2015/863 Compliant

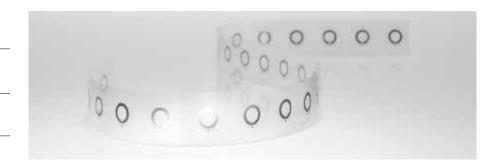

# Fulfilling specific demands in healthcare and beauty

AD-850m4QT inlays from Avery Dennison are a great fit for tagging glass vials and other particularly small medical and beauty (cosmetics or perfume) packages.

The globally tuned inlay can achieve up to 1.0 meter read distance in FCC (920-928 MHz) when applied to liquid filled vials made of plastic or glass.

The antenna size of AD-850m4QT is the smallest size offered in Avery Dennison's Gen2 UHF RFID compliant UHF inlay portfolio, measuring 10.3mm in diameter and recommended for reading tagged items in near-field. The Impinj Monza 4QT chip enables users to maintain a public and private data profile for confidential data storage and consumer privacy, coupled with 512-bit of user memory. AD-850m4QT inlays are available in Dry Inlay and Wet Inlay delivery formats.

Like all RFID products from Avery Dennison, AD-850m4QT inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.





#### **Technical features**

Chip	Impinj Monza 4QT	
EPC and User Memory	128-bit and 512-bit	
TID Memory	48-bit	
Product Code	RF601090	RF601091
Delivery Format	Dry inlay	Wet inlay
Die-cut Dimension	-	Ø 13 mm / 0.53 in
Inlay Substrate	PET	
Total Thickness	4 - 6 mils / 97 - 147 microns	5 - 7 mils / 135 - 185 microns
Standard Pitch	23.81 mm / 0.9375 in	
Web Width	24 mm / 1 in	
Core Size	76 mm / 3 in	
Quantity / Reel	15863 pcs / reel	12600 pcs / reel
Operating	-40 °C to 85 °C	
Temperature	-40 °F to 185 °F	
On-Metal	Non metal	

## Orientation sensitivity

### Read range



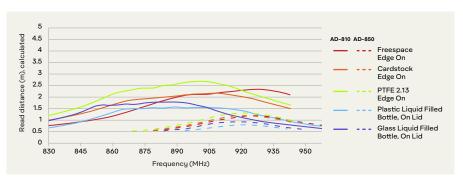

All graphs are indicative: performance in real life applications may vary.


#### **Contact information**

rfid.averydennison.com/contact

North America: +1-866-903-7343 (toll free US)

International: +1-678-617-2359

**RoHS** 



Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep

environmental impact and static charge to a minimum. Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the



particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.