

Compact Ceramic Vehicle and Container RFID Tracking Tag

Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	US(902-928MHZ), EU(866-868MHZ)
IC type:	Alien Higgs-3
Memory:	EPC 96bits , USER 512bits, TID64bits
Write Cycles:	100,000 times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	10.0m, On metal
Read Range : (Handheld Reader)	7.0m, On metal
Warranty:	1 Year



Physical Specification:

Size:	30.0x30.0mm
Thickness:	3mm
Material:	Ceramic
Colour:	Black
Mounting Methods:	Adhesive
Weight:	14.0g

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHSApproved, CEApproved

Dimensions:

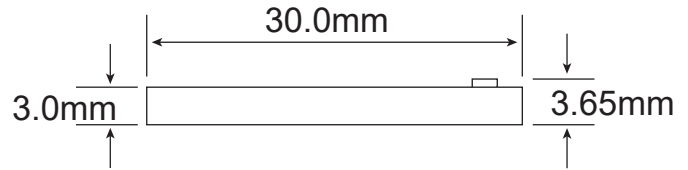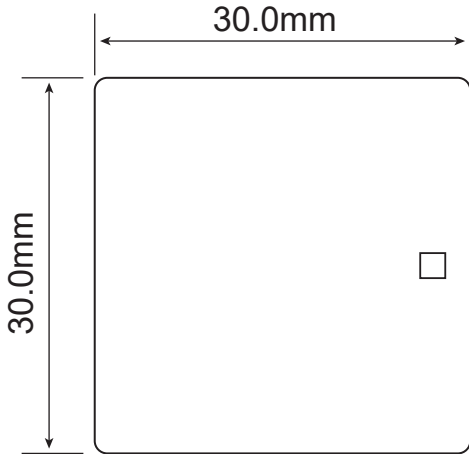

CER3030UI:

