


FL20 Fashion Tag

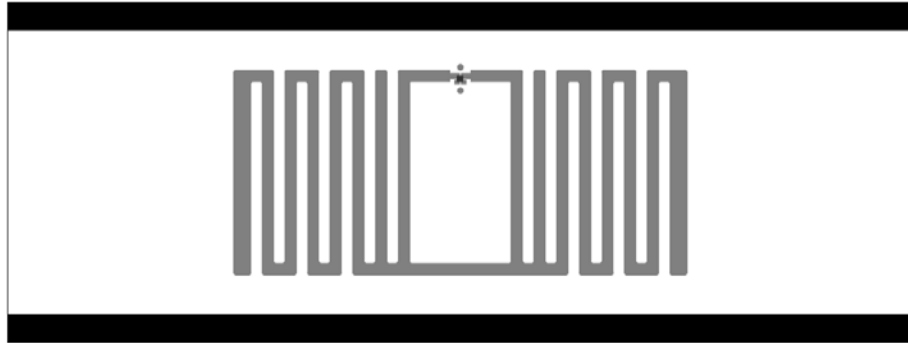

FL20 Fashion Tag

Air interface protocol

EPC Global Class1 Gen2 ISO 18000-6C

Operational frequency

Global 860-960MHz

Tag dimensions

80 x 30 mm / 3.15" x 1.18"

Applications:



STORE



TEXTILE






DRY CLEANING

FL20 Fashion Tag

Mechanical Specification	
Substrate	PET
Liner	Nylon
Face material	Nylon
Weight	2g / pc
Delivery format	2000 pcs on reel
Pitch on reel	30 mm / 1.18"
Reel core inner diameter	76 mm / 3"
Tag dimensions	80 x 30 mm / 3.15" x 1.18"

Environmental Resistance	
Operating temperature	-40°C~-85°C / -40°F~-185°F
Ambient temperature	-40°C~-85°C / -40°F~-185°F
Storage condition	2 year at +20°C / 50% RH
Expected lifetime	2 years in normal operating conditions

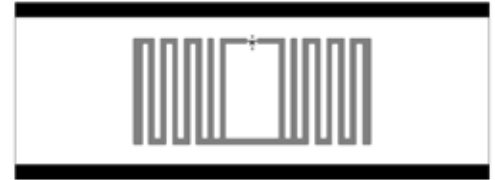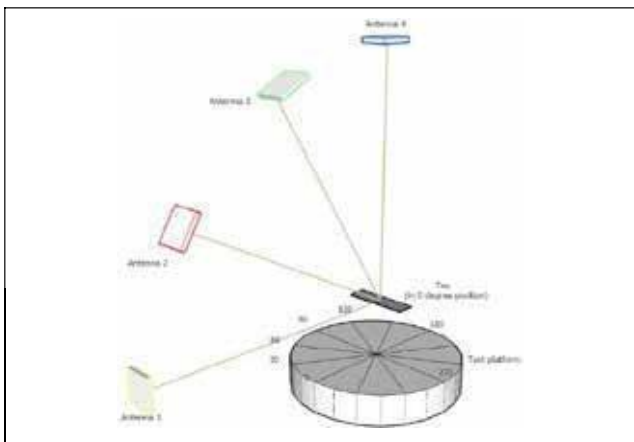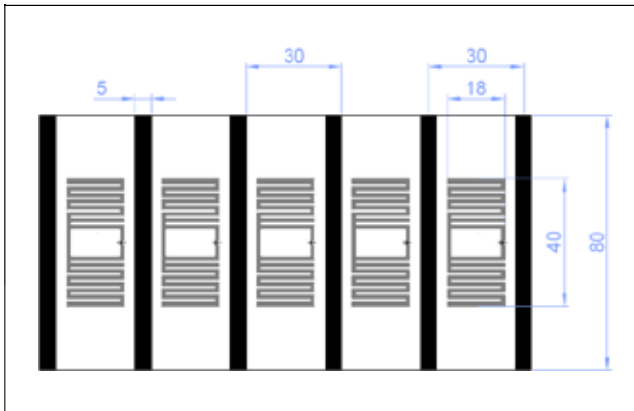

Electrical Specification	
Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPC Global Class1 Gen2 ISO 18000-6C
Operational frequency	Global 860-960MHz
IC type	UCODE 7or Monza5
Memory configuration	EPC 128 bits; Unique TID 96 bits; User Memory 0 bits
Read range	Up to 6 m / 19.69 ft

