


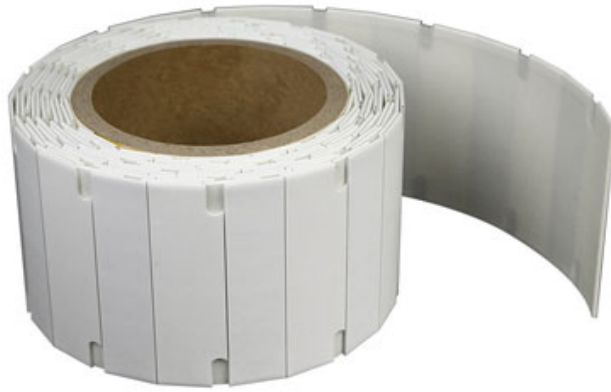

## Flexible Printable Metal Top Label For Vehicle

### Functional Specifications:

|                                           |                                     |
|-------------------------------------------|-------------------------------------|
| <b>RFID Protocol:</b>                     | EPC Class1 Gen2, ISO18000-6C        |
| <b>Frequency:</b>                         | (US) 902-928MHZ, (EU)865-868MHZ     |
| <b>IC type:</b>                           | Impinj Monza R6-P                   |
| <b>Memory:</b>                            | EPC128bits , User 64bits, TID96bits |
| <b>Write Cycles:</b>                      | 100,000 Times                       |
| <b>Functionality:</b>                     | Read/write                          |
| <b>Data Retention:</b>                    | 50 Years                            |
| <b>Applicable Surface:</b>                | Metal Surfaces                      |
| <b>Read Range :<br/>(Fix Reader)</b>      | 4.0m On metal                       |
| <b>Read Range :<br/>(Handheld Reader)</b> | 2.8m On metal                       |
| <b>Warranty:</b>                          | 1 Year                              |


### Physical Specification:

|                             |                                          |
|-----------------------------|------------------------------------------|
| <b>Size:</b>                | 70.0x18.0mm                              |
| <b>Thickness:</b>           | 1.0mm                                    |
| <b>Material:</b>            | Foam                                     |
| <b>Colour:</b>              | White (Customizable color printing)      |
| <b>Mounting Methods:</b>    | Adhesive                                 |
| <b>Weight:</b>              | 1.7g                                     |
| <b>Recommended Printer:</b> | Zebra R110Xi4 / Postek TX3R / SATO CL4NX |

### Environmenal Specification:

|                 |                                            |
|-----------------|--------------------------------------------|
| IP Rating:      | IP57                                       |
| Temperature:    | -20 ~ 85°C                                 |
| Certifications: | Reach Approved, RoHS Approved, CE Approved |

### Dimensions:

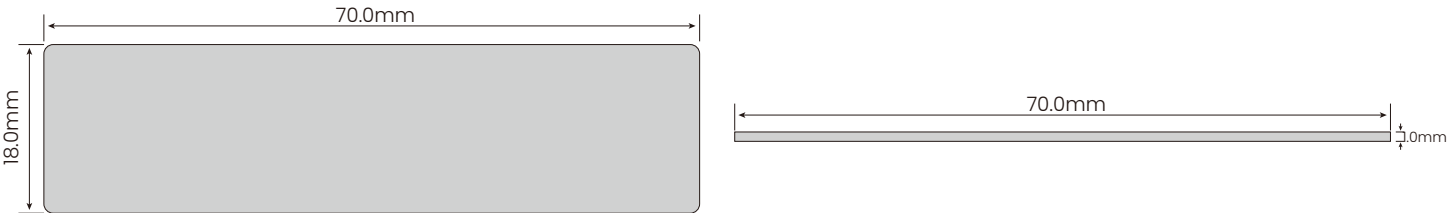

### OM T7018 (On metal)

