Conni-ID[®]




[**Products**] you can **id**entify with



	Physical Specifications
Material	White synthetic label encased
Size	123 x 33 x 6.25 mm, 4.84 x 1.29 x 0.24 in
Weight (g)	14.5
Attachment	Mechanical (Std), Foam adhesive (Std)

Dimensions

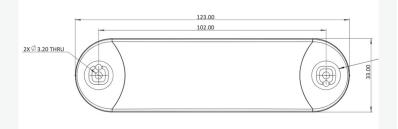

Measurements shown in mm

Flex 1200 Shell


The Flex 1200 Shell adds a hard, clear case upper on top of our Flex label tag to provide medium level protection from knocks, liquid spillage or other environmental factors. The transparent case is an ideal way to protect printed information on the label whilst still making it readable by the human eye and without any impact on the read performance. The label itself is a low profile, small form factor RFID tag designed specifically for attachment to office equipment, IT assets or RTI's. With its superior RF performance, this tag excels in portal applications where the read range can be expanded by up to 25%. The Flex 1200 label on its own is well suited to indoor applications where a low-cost option is needed and the addition of the 'Shell' makes it a cost effective semi robust outdoor option.



RF Specifications				
Radio Protocol	EPC Class 1 Gen2v2			
Frequency Range	866 - 928 (GS)			
Read Range – Fixed Reader	Up to 11.2m (36.74 feet)			
Read Range – Handheld Reader	Up to 6m (19 feet)			
On Metal or Balanced	Optimized for metal			
Material Compatibility	Metal			
IC Type (Chip)	U-Code8			
Memory	EPC - 128 bits User - 0 bits Unique TID - 48 bits			

EPC and User memory are reprogrammable. UTID is locked at point of manufacture by IC manufacturer.

Radiation Patterns

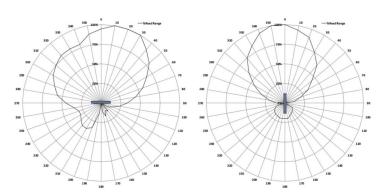





[**Products**] you can **id**entify with



The Flex 1200 Shell is ideally suited to applications such as:

- Office equipment
- Portals & Returnable Transit Items (RTI)
- Light outdoor use

Certifications

CE, RoHS, US&Canada (C1D1/D2) certified (option)

CE KROHS

Environmental Specifications					
Operating Temperature	-30°C to +65°C				
IP Rating	IP68				
Impact	1KG				

Ord	ering	Inforn	nation
<u> </u>			ind the fit

Warranty	1 year
Part Number / Order Codes / Order Numbers	CP14546

For product or technology inquiries email: **sales@omni-id.com**. Visit **omni-id.com** to learn more about the complete line of **Omni-ID RFID** products