


# RD 41 UHF 12 DBI

Integrated RFID Reader

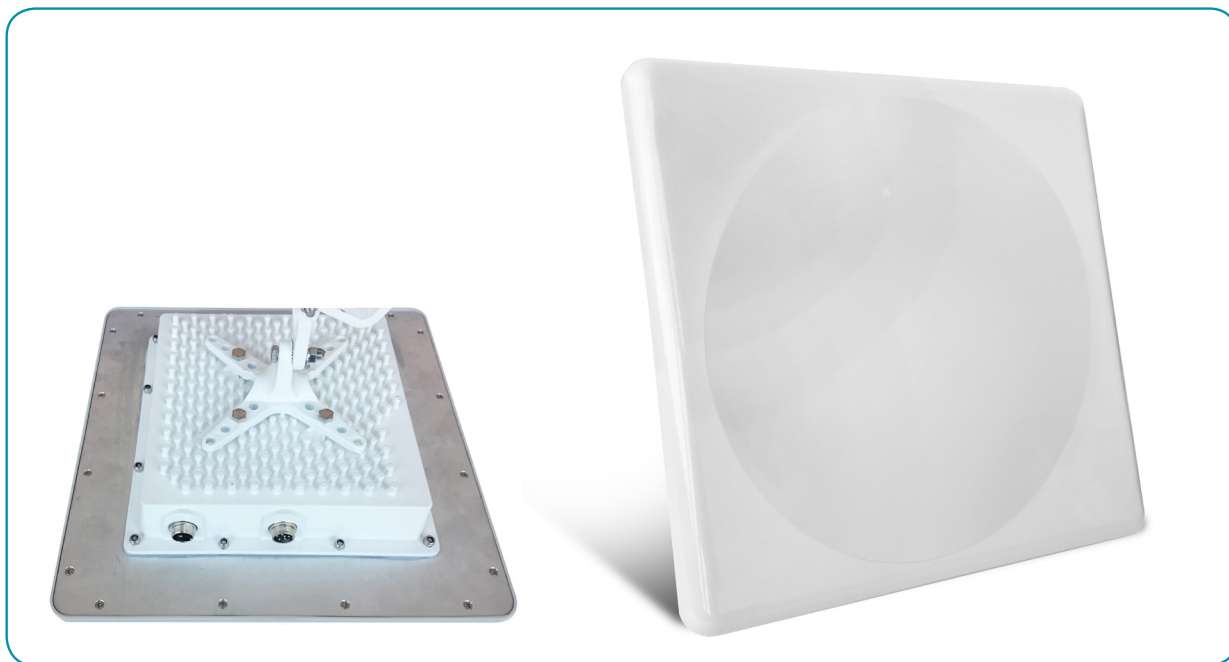

## ANTENNA SPECIFICATIONS

ELECTRICAL CHARACTERISTICS	
Operating Frequency	865-868 MHz
Polarization	Circular (RHCP)
Far Field Gain	12 dBi
VSWR	1.5:1
Input Impedance	50
Max Input Power	100
F/B Ratio	20dB
MECHANICAL	
Connector Type	N Female
Dimensions	45 x 45 x 3 cm

## ENVIRONMENT

**Operating Temperature**

-40° to +70°C

## READER SPECIFICATIONS

### CHARACTERISTICS

<b>Phychip PR9200 Inside</b>	<ul style="list-style-type: none"> <li>• PR9200 has an outstanding performance with a low cost</li> </ul>
<b>Excellent Performance of Reading Tags</b>	<ul style="list-style-type: none"> <li>• Identifying Tags sensitively and stably</li> <li>• Stable read distance is 2-3m with Microstrip ceramics antenna</li> <li>• 8dBi Circular Polarization Planar Antenna: &gt;10m</li> <li>• 12dBi Linear polarization antenna: &gt;15m</li> <li>• Performance of multi-tags identification: &gt;50pcs</li> <li>• Read rate: &gt;50pcs/s</li> </ul>
<b>Completely Solve the Problem of Heat</b>	<ul style="list-style-type: none"> <li>• Don't need any cooling devices</li> <li>• No heat during long-term continuous full load working at room temperature</li> <li>• Continuous Current &lt;200mA @26 dBm Output (3.5V Power Supply)</li> <li>• Peak pulse current &lt;260mA @26 dBm Output (3.5V Power Supply)</li> </ul>
<b>Excellent Stability</b>	<ul style="list-style-type: none"> <li>• 24 hours X 365 days continuous working without Crash</li> <li>• Less influence by shell, electromagnetic environment, etc.</li> <li>• Wide temperature design. Temperature Coefficient is very low</li> </ul>
<b>Excellent Consistency</b>	<ul style="list-style-type: none"> <li>• A model of design consistency</li> <li>• Every indicators are calibrated rigorously, ensure consistency</li> </ul>
<b>Simple and Efficient Interface</b>	<ul style="list-style-type: none"> <li>• Communication interface is compatible with our INDY R2000 series</li> <li>• Peripheral circuits are very simple, single power, don't need to connect Ta</li> <li>• capacitor externally (See figure 1: Circuit Design Reference)</li> </ul>
<b>Supports Two Installation Methods</b>	<ul style="list-style-type: none"> <li>Supports RF connector + FPC connector installation method</li> <li>• Supports Surface Mount Solder</li> </ul>
<b>Input Voltage</b>	DC 3.5V – 5 V
<b>Standby Mode Current</b>	<80mA (EN High Level)
<b>Sleep Current</b>	<100uA (EN Low Level)
<b>Operating Current</b>	180mA @ 3.5V (26 dBm Output, 25°C) 110mA @ 3.5V (18 dBm Output, 25°C)
<b>Starting Time</b>	<80mS

## READER SPECIFICATIONS

CHARACTERISTICS	
Input Voltage	DC 3.5V – 5 V
Standby Mode Current	<80mA (EN High Level)
Sleep Current	<100uA (EN Low Level)
Operating Current	180mA @ 3.5V (26 dBm Output, 25°C) 110mA @ 3.5V (18 dBm Output, 25°C)
Starting Time	<80mS
Operating Temperature	- 20 °C - + 70 °C
Operating Humidity	< 95% ( + 25 °C)
Air Interface Protocol	EPCglobal UHF Class 1 Gen 2 / ISO 18000-6C
Supported Region	ETSI EN 302 208
Output Power	0-26 dBm
Output Power Precision	+/- 1dB
Output Power Flatness	+/- 0.2dB
RF Connector	I-PEX
Receive Sensitivity	< 70-dBm
Tag Buffer Size	200 pcs @ 96 bit EPC
Tag RSSI	Supported
Host Communication	TTL Uart port Wiegand 26 Wiegand 34
GPIO	2 input 2 output (3.3V TTL Level)
Baud Rate	115200 bps (Default and Recommended) 38400bps
Cooling	Air cooling (Don't need external Heatsink)

## APPLICATIONS



VEHICLE PASS SYSTEM



LOGISTICS MANAGEMENT



WEIGHBRIDGE AUTOMATION



WAREHOUSE AUTOMATION

Yenidoğan Merve Mah. Atatürk Cad. No 314 - Sancaktepe - ISTANBUL

Mobile: +90 553 268 6634 / Fax: +90 216 465 9402

[www.rfidmarket.com.tr](http://www.rfidmarket.com.tr)