



RFGate Rfid Metal Üstü Sabit Varlık Etiketi (80x08mm)

Colour:



Black



Red



Blue



Green



White


Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz, (EU) 865-868MHz
IC type:	Alien Higgs-3
Memory:	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	Up to 6.5M - (US) 902-928MHz, on metal Up to 5.9M - (EU) 865-868MHz, on metal
Read Range : (Handheld Reader)	Up to 3.4M - (US) 902-928MHz, on metal Up to 3.1M - (EU) 865-868MHz, on metal
Warranty:	1 Year



Physical Specification:

Size:	80x8.0mm, (Hole: D3mm)
Thickness:	3.5mm
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Adhesive, Screw
Weight:	5.0g



Dimensions:

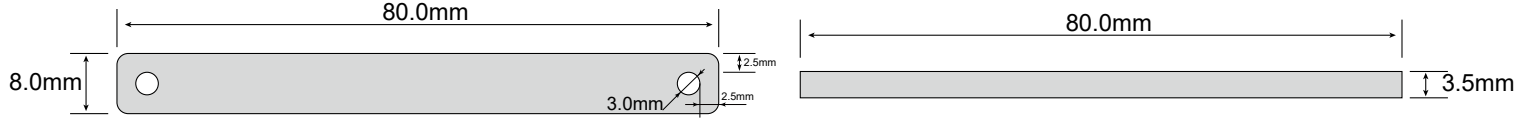

PCB T8008UI:

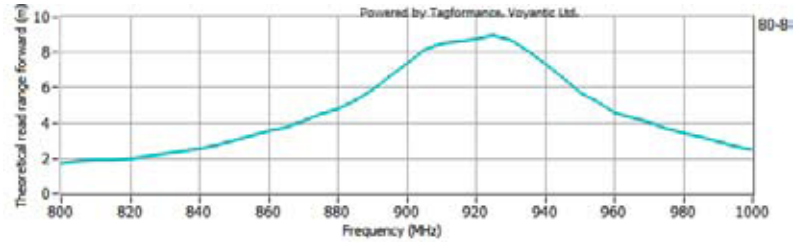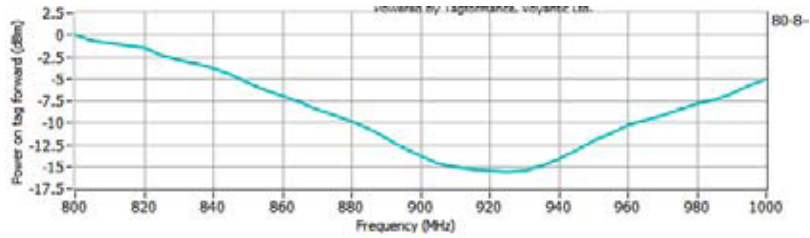

PCB T8008EI:

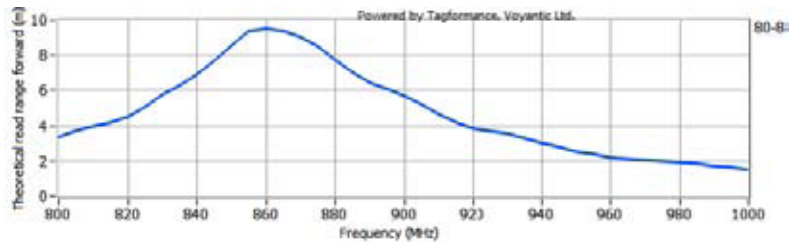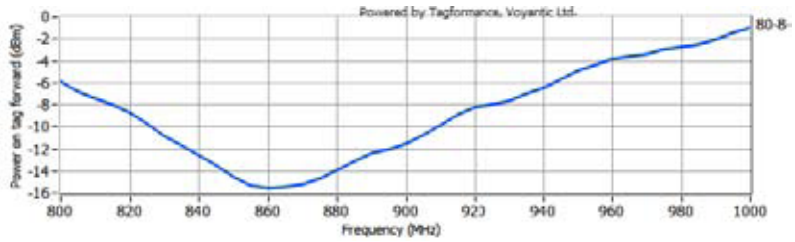

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

Order information:

PCB T8008U1	(US) 902-928MHz,
PCB T8008E1	(EU) 865-868MHz