



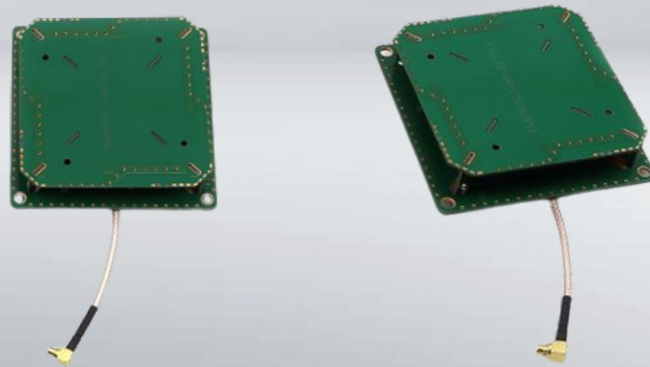

865-865MHz 3dBi RFID PCB

Model 1	
Electrical Specifisations	
Frequency Range (MHz)	865-868
Gain (dBi)	3dBi
Polarizastion	Circular
Beam width	Hor:120 Ver:120
VSWR	<1.5
Impedance	50
Axial ratio (dB)	<3
MAX.Power(W)	50
Lighthing protection	

Mechanical Specification	
Connector	MMCX NC
Connector position	Side
Dimention(mm)	60x60x12mm
Antenna weight	30g
Reflector material	FR4
Radome color	gr
Operating temperature(°C)	-40~55

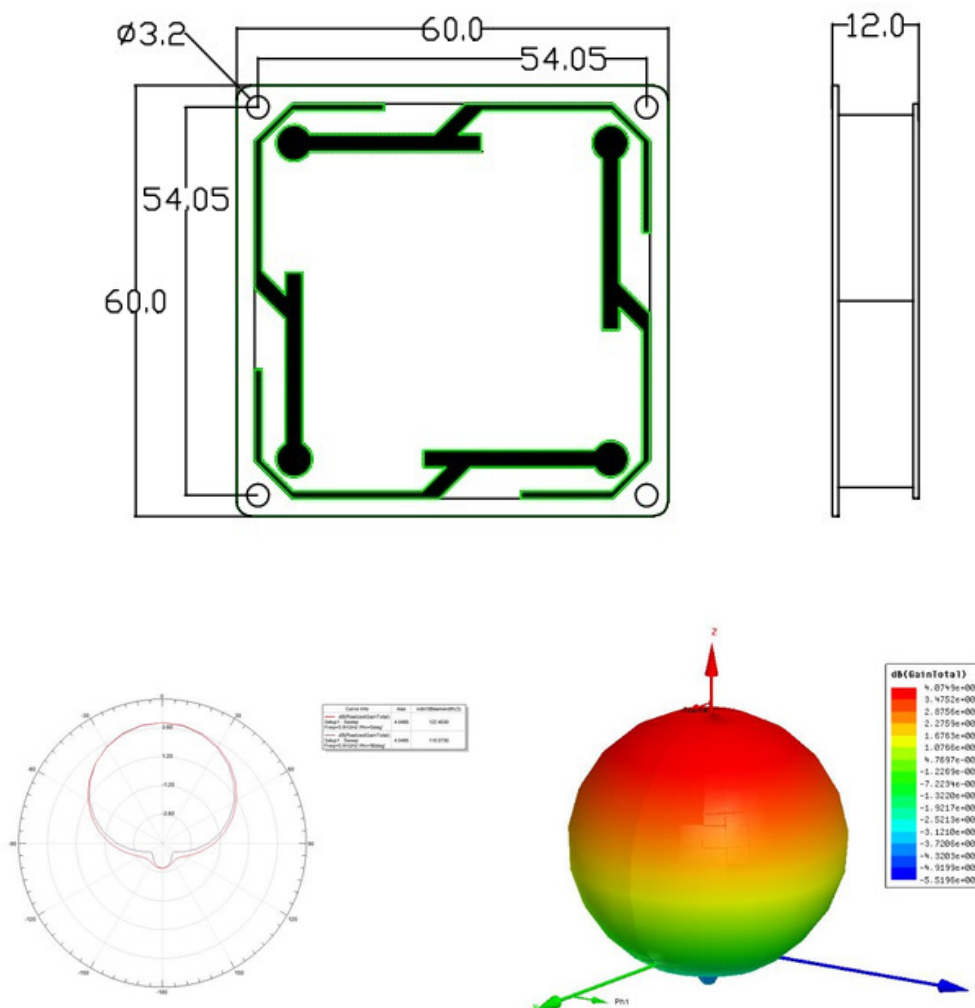

2D

3D