


**RFGate UHF Metal Üstü En Küçük RFID Etiketi****Functional Specifications**

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz, (EU) 865-868MHz
IC type:	Alien Higgs-3
Memory:	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	100cm - (US) 902-928MHz, on metal 90cm - (EU) 865-868MHz, on metal
Read Range : (Handheld Reader)	60cm - (US) 902-928MHz, on metal 55cm - (EU) 865-868MHz, on metal
Warranty:	1 Year


**Physical Specification**

Size:	Diameter5mm
Thickness:	4.0mm with IC bump
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Embed , Adhesive
Weight:	0.5g


**Dimensions**

## RFGate UHF Metal Üstü En Küçük RFID Etiketi

### PCB TD5U1

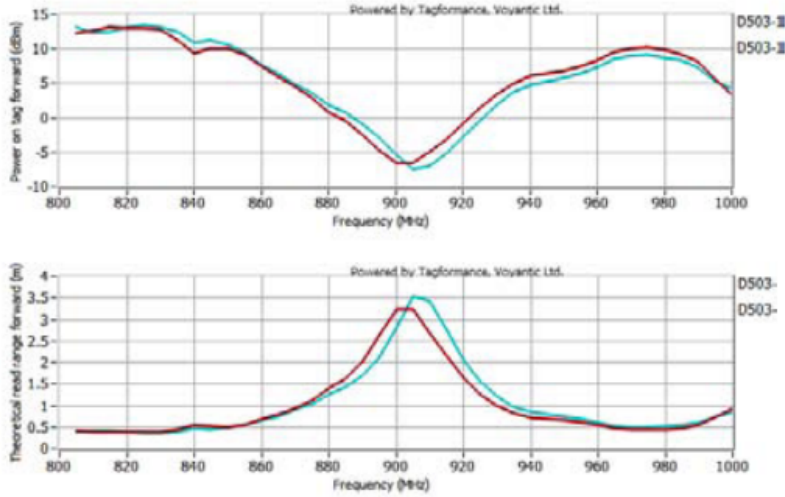

### PCB TD5E4

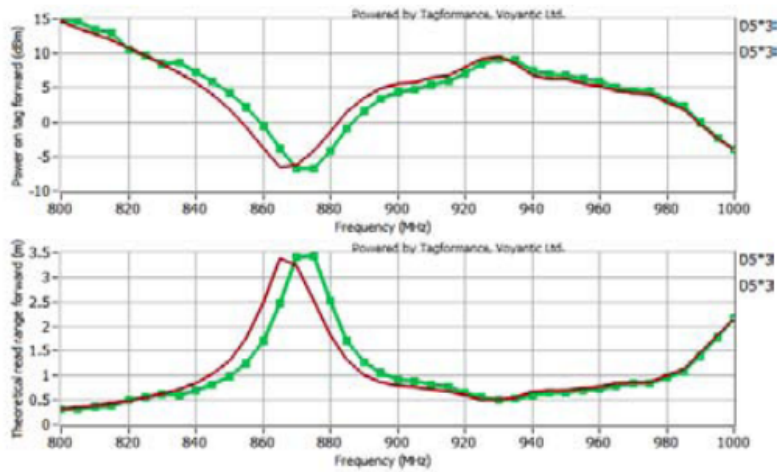

### Environmental Specification

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

### Order Information

PCB TD5U1	(US) 902-928MHz,
PCB TD5E4	(EU) 865-868MHz