

Professional RFID Tag solutions Provider

Alarm Tag- TAC3360

This alarming RFID Cable Tag is designed for high end garments, bags, shoes etc, offers more security and graceful solutions for the displayed merchandise without any damage.

Physical Specification

Dimension (mm/in): $60 \times 33.6 \times 16$ mm
(2.36" \times 1.32" \times 0.63")

Lanyard Length: 120mm or customized

Lock: Standard or Super

Color: White, Black or Customized

Encasement: ABS

Quality Assurance: 100% Performance Test

Electrical Specification

Protocol: ISO/IEC 18000-6C & EPC
global Class 1 Gen 2

Operating Frequency: 860-960MHz

Integrated Circuit [IC]: Semi active IC

EPC Memory: 352Bits

User Memory: 3072Bits

Unique TID: 48Bits


Access Password: 32 Bits

Kill Password: 32 Bits

Read Range: Up to 5m(US) Up to 5m(EU)
Fixed Reader power - 27dbm


Expected read cycles: 100,000 cycles 23 • •

Data retention: 10 years

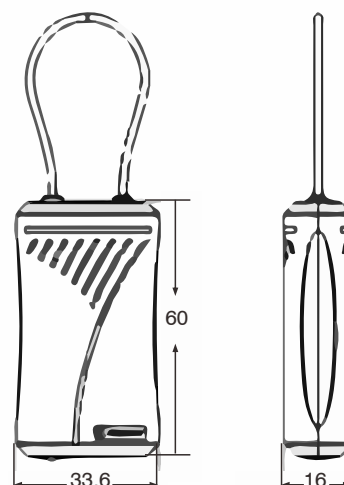

Radiation Patterns

Read Range

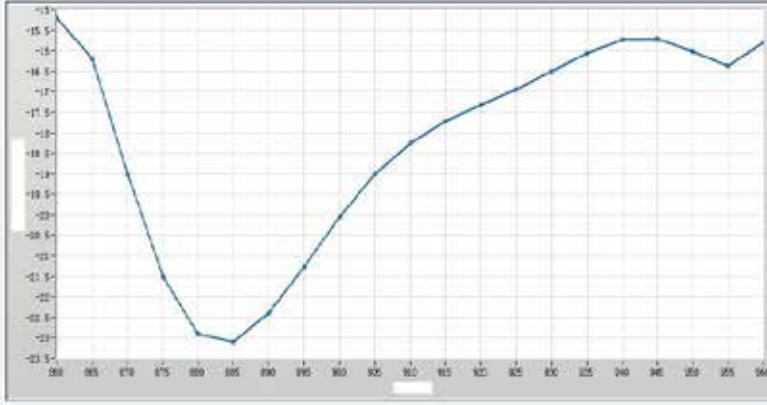

Packing information

Packing Format:	Carton
Weight per pieces:	22.8g
Quantity per box:	50pcs
Box Dimension:	405×305×200mm
Weight per box:	1.1kg
Quality Assurance:	100% performance tested 100 read tested with out-of tolerance inlay marked 100% edit and replace

Environmental

Operating Temperature:	-20C ~80C
Operating Humidity:	50%~55%
Storage Temperature:	-40C ~85C
Storage Humidity:	50%~55%
IP Rating:	IP54
Expected lifetime:	3 years
Certificate:	EPC Global

Notes:

- 1.Keep the lanyard unlocked when it not in use;
- 2.Metallic products will affect the performance somewhat;
- 3.It beeps when the lanyard insert the tag which indicates it get into work;
- 4.It will alarm when the tags damaged and use a magnetic detacher to unlock and stop alarming