



## RFID Yuvalı UHF Metal Üstü Okuma Mesafesi Uzun Etiket

### Functional Specifications:

<b>RFID Protocol:</b>	EPC global and ISO 18000-63 compliant, Gen2v2 compliant
<b>Frequency:</b>	840MHz to 940MHz
<b>IC type:</b>	Impinj Monza R6-P
<b>Memory:</b>	EPC128 bits , USER64 bits, TID96 bits
<b>Write Cycles:</b>	100,000 times
<b>Functionality:</b>	Read/write
<b>Data Retention:</b>	Up to 50 Years
<b>Applicable Surface:</b>	Metal Surfaces
<b>Read Range : (Fix Reader)</b>	12.0m, (US) 902-928MHz, On Metal 10.0m, (EU) 865-868MHz, On Metal
<b>Read Range : (Handheld Reader)</b>	6.0m, (US) 902-928MHz, On Metal 5.0m, (EU) 865-868MHz, On Metal
<b>Warranty:</b>	1 Year

### Physical Specification:

<b>Size:</b>	89.0x25.0mm, ( Hole:D5mmx2)
<b>Thickness:</b>	10.5mm
<b>Mounting Methods:</b>	Adhesive, Screw, Rivet
<b>Material:</b>	PC
<b>Weight:</b>	22.0g


### Environmental Specification:

<b>IP Rating:</b>	IP68
<b>Storage Temperature:</b>	-30°C to +70°C
<b>Operation Temperature:</b>	-30°C to +70°C
<b>Certifications:</b>	Reach Approved, RoHS Approved, CE Approved

Order information:


**OPP089:** 840MHz to 940MHz

Dimensions:

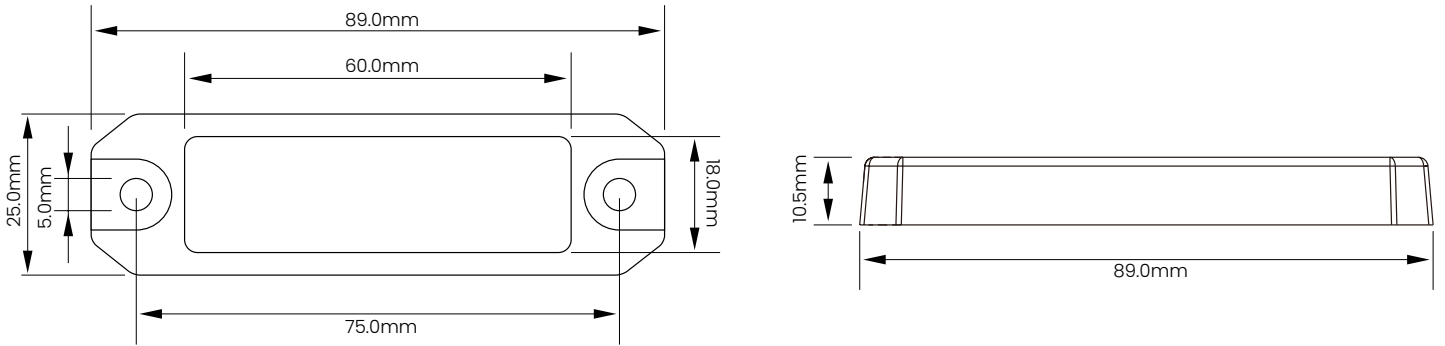

OPP089:

Powered by Tagformance, Voyantic Ltd.

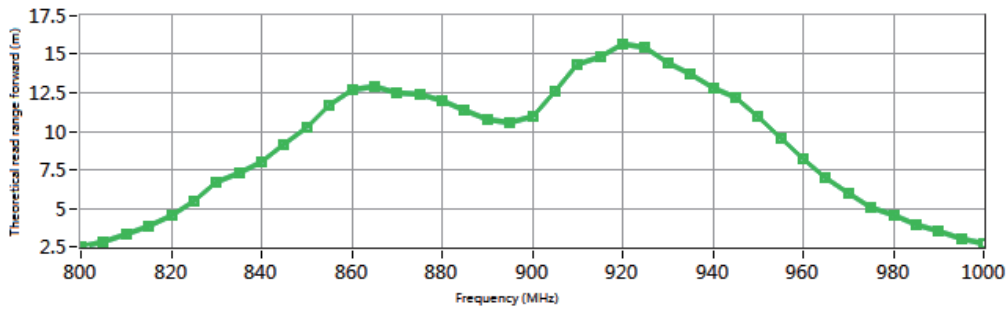

Powered by Tagformance, Voyantic Ltd.

