

Teknopalas-T70R6 RFID Label

Air interface protocol

EPC Global Class1 Gen2 ISO 18000-6C

Operational frequency


Global 860-960MHz

Tag dimensions

73 x 20 mm / 2.87" x 0.79"

Teknopalas-T70R6

RFID Label

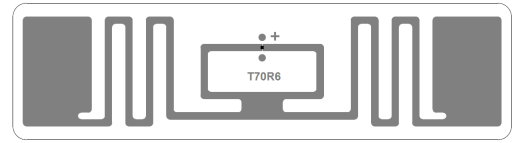

Mechanical Specification	
Substrate	PET
Liner	Glassine Liner
Weight	1g / pc
Delivery format	5000 pcs on reel
Pitch on reel	25.797 mm / 1.02"
Reel core inner diameter	76 mm / 3"
Tag dimensions	73 x 20 mm / 2.87" x 0.79"

Electrical Specification	
Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPC Global Class1 Gen2 ISO 18000-6C
Operational frequency	Global 860-960MHz
IC type	Monza R6
Memory configuration	EPC 96 bits; Unique TID 48 bits; User Memory 0 bits
Read range	Up to 13 m / 42.65 ft

Environmental Resistance	
Operating temperature	-20°C ~ 80°C / -4°F ~ 176°F
Ambient temperature	-20°C ~ 80°C / -4°F ~ 176°F
Storage condition	2 year at +20°C / 50% RH
Expected lifetime	2 years in normal operating conditions

