


denaline

- [1] Sight Glass
- [2] Float Ball
- [3] HNBR O-Ring
- [4] Welding Conn.


Gözetleme Camı
Top
HNBR O-Ring
Kaynak Bağlantısı



Order No	Quantity x Model	Connection	Maximum Allowable Pressure [PS]	Allowable Temperature [TS]
H30	1x SW38	1 1/8" -18 UNEF	130 bar	-20°C / 130°C
H31	2x SW38		90 bar	-40°C / -20°C
H32	3x SW38			

- [1] Rotalock Conn.
- [2] Sight Glass
- [3] Float Ball
- [4] Teflon Gasket
- [5] Cage
- [6] Rot. Welding Conn.

Rotalok Bağlantı
Gözetleme Camı
Top
Teflon Conta
Kafes
Rot. Kaynak Bağlantısı

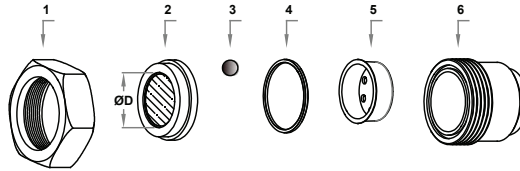

Order No	Quantity x Model	Connection	Maximum Allowable Pressure [PS]	Allowable Temperature [TS]
H4	1x SGC134	Rot. 1 3/4"	45 bar	-10°C / 130°C
H5	2x SGC134		33 bar	-40°C / -20°C
H6	3x SGC134			

Sight Glasses

- Used for controlling level of liquid and oil.
- Floating body is not suitable for R717

Gözetleme Camları

- Likit ve yağ seviyelerini kontrol amaçlı kullanılmaktadırlar.
- Toplar R717 için uygun değildir.