

GVN STANDART PRODUCT

Customer

VERTICAL LIQUID RECEIVER

Product

VLRA.30b.03.B2.C2

Code

Customer Code

DESIGN DATA

Capacity [Lt.]	3 Lt.
Design Pressure [PS]	30 Bar
Pneumatic Test Pressure [PT]	33 Bar
Hydraulic Test Pressure	43 Bar
Design Temperature [TS]	Min.-20C / Max.+130C
Cooler Fluid Type	HFC-CFC-HCFC
Fluid Group	2
Category	CAT I / A
Desing Calculation	EN 14276-1/EN 13445-3
Welded Joint Efficiency	0.85
Material Group (Shell / Head)	1.2
Testing Group	3b
Corrasion Allowance	0,5 mm
Ndt	10%
Packaging Size & Weight	00*00*00 & 00 Kg.
Drawed By	Ö.TÜRKER
Approved By	D.GÜL
Date	20.06.2022
Color	RAL 5009

MATERIAL DATA

No	Connection	Model	Code	Material	Qty
1	Inlet Connection	ODS 3/8" H:30	106.060.B02.000.004	ST44-E275	1
2	Outlet Connection	ROT. 1" H:25	106.060.A02.001.001	E275-ST44	1
3	Outlet Valve	RV.45b-3/8			1
4	Deep Drawn	Ø140x2,5 H:110	203.030.001.001.001	EN 10111-DD13	1
5	Deep Drawn	Ø140x2,5 H:110	103.030.002.001.000	EN 10111-DD13	1
6	Pipe	Ø13x1	204.A13.010.000.150	EN10297-1 E235	1
7	Skirt With	Ø136x2,5 H:17	105.004.136.001.001	DD-13	1

GENERAL NOTES


- Max. allowable operating pressure (PS) according to the temperature range;
- 1) Allowable operating temperature : min. -10C° / max. +100C° PS1 = 33 Bar
- 2) Allowable operating temperature : min. -10C° / max. -40C° PS2 = 24 Bar
- Unless otherwise specified dimensions in MM
- Unless otherwise specified do not scale
- Unless otherwise specified tube must be clean&free form burrs inside&outside&uitable for soldering
- Unless otherwise specified do not scale indicated thickness are min. after forming or machining
- Unless otherwise specified dimension tolerances according to EN 113445-4

REVISIONS

No	Details Of Change	Date	By
01			
02			
03			

RELATED DRAWINGS

No	Description	Drawing No
01		
02		

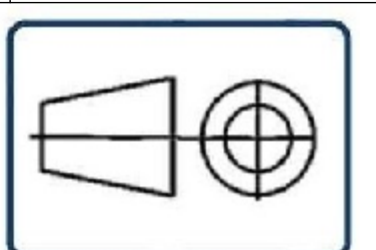

No	Assembly Codes	Qty
1	M005.000018	1

We reserve all rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden.

