


MPA12080.0 (12V80Ah)

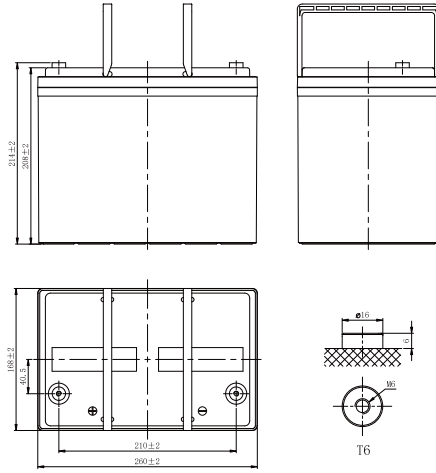

CHARACTERISTICS


Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₁₀ , 1.80V/cell	80Ah
Dimension	Length	260mm (10.2inches)
	Width	168mm (6.61inches)
	Container Height	208mm (8.19inches)
	Total Height	214mm (8.43inches)
Approx Weight	23.8kg (52.5lbs)	
Terminal	T6(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1840A	
Internal Resistance (25°C)	Approx 6.2 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F). batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

DISCHARGE TABLE


Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	162.8	115.7	104.7	82.3	73.6	53.8	45.6	33.0	27.8	20.4	16.0	13.9	12.2	9.40	7.79	4.13
1.80V/cell	185.1	131.4	118.6	93.1	80.1	57.0	47.2	34.2	28.7	22.1	17.1	14.6	13.1	9.89	8.00	4.28
1.75V/cell	201.1	142.5	128.4	100.5	81.8	59.0	49.5	35.9	30.2	22.5	17.4	14.9	13.2	9.95	8.24	4.33
1.70V/cell	215.0	151.9	136.4	106.5	83.4	60.2	50.5	36.6	30.8	23.0	17.7	15.1	13.3	10.1	8.32	4.37
1.67V/cell	222.5	156.7	140.4	109.4	84.6	61.1	51.3	37.2	31.2	23.2	18.0	15.4	13.4	10.2	8.43	4.43
1.60V/cell	230.4	162.1	144.7	112.2	85.9	62.0	52.0	37.7	31.7	23.4	18.2	15.6	13.4	10.4	8.53	4.48
Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	304.0	217.8	198.2	156.6	140.6	101.3	88.2	64.1	54.0	39.8	31.4	27.3	24.1	18.7	15.5	8.23
1.80V/cell	340.1	243.6	221.7	175.1	151.9	106.6	90.8	65.9	55.5	43.0	33.4	28.6	25.8	19.6	16.2	8.52
1.75V/cell	363.0	260.0	236.6	186.9	153.8	109.8	94.9	69.0	58.2	43.7	33.9	29.0	25.9	19.6	16.3	8.59
1.70V/cell	381.6	273.3	248.7	196.5	155.6	111.2	96.3	70.1	59.1	44.4	34.3	29.4	26.0	19.9	16.5	8.67
1.67V/cell	387.8	277.8	252.8	199.7	156.7	112.2	97.1	70.7	59.7	44.6	34.7	29.9	26.1	20.1	16.7	8.77
1.60V/cell	393.2	281.6	256.3	202.5	157.4	112.8	97.9	71.3	60.2	44.8	35.0	30.2	26.2	20.4	16.8	8.86

MPA12080.0 (12V80Ah)


Discharge Characteristics

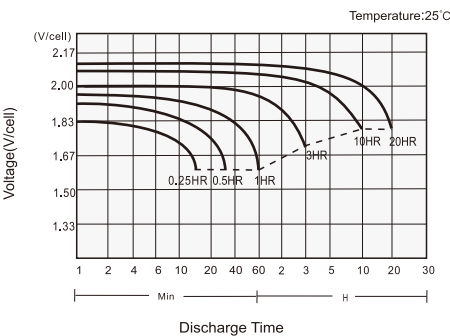

Charging Characteristics

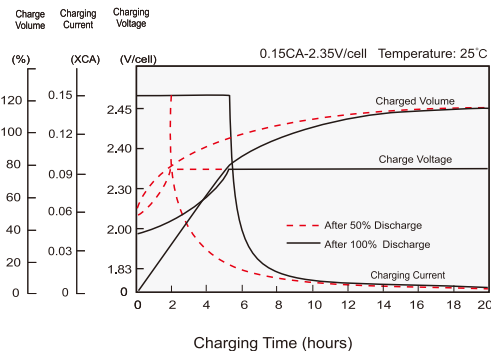

Effects of Temperature on Capacity

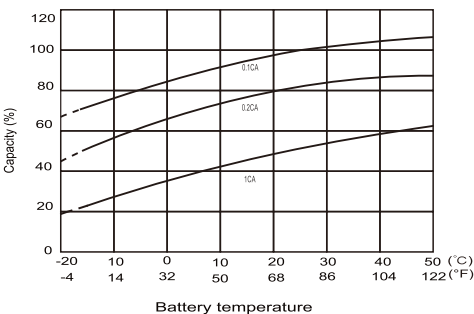

Self Discharge Characteristics

