



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250400261501

Page: 1 of 20

TEST REPORT

Application No.: SHEM2504002615MD
Applicant: [REDACTED]
Address of Applicant: [REDACTED]
Manufacturer: [REDACTED]
Address of Manufacturer: [REDACTED]
Factory: [REDACTED]
Address of Factory: [REDACTED]
Equipment Under Test (EUT):
EUT Name: KD11C, KD126
Model No.: KD11C, KD126
Remark: Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : EN IEC 61000-6-3: 2021
EN IEC 61000-6-1: 2019
Date of Receipt: 2025-04-23
Date of Test: 2025-05-07 to 2025-05-08
Date of Issue: 2025-05-15

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250400261501

Page: 2 of 20

Revision Record			
Version	Description	Date	Remark
00	Original	2025-05-15	/

Authorized for issue by:			
Tested By		Sunny Zhou	
		Sunny Zhou/Project Engineer	
Approved By		Parlam Zhan	
		Parlam Zhan / Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (30MHz-1GHz)	EN IEC 61000-6-3: 2021	CISPR 16-2-3: 2016 +A1:2019 +A2:2023	Table 3.1	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN IEC 61000-6-1: 2019	EN 61000-4-2:2009	± 4kV Contact Discharge, ±8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz, 1.4GHz-6GHz)		EN IEC 61000-4-3: 2020	3V/m, 80%, 1kHz Amp. Mod.	Pass

Note: There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model KD126 was tested since their differences were model number and appearance.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units.....	5
4.3 Measurement Uncertainty & Decision Rule.....	5
4.4 Test Location	6
4.5 Test Facility	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions	6
4.8 EMS Monitor.....	6
5 Equipment List	7
6 Emission Test Results.....	9
6.1 Radiated Emissions (30MHz-1GHz).....	9
6.1.1 E.U.T. Operation	9
6.1.2 Test Mode Description	9
6.1.3 Test Setup Diagram	9
6.1.4 Measurement Procedure and Data	10
7 Immunity Test Results.....	13
7.1 Electrostatic Discharge.....	14
7.1.1 Test Setup Diagram	14
7.1.2 E.U.T. Operation	14
7.1.3 Test Mode Description	14
7.1.4 Test Condition and Results:	14
7.2 Radiated Immunity (80MHz-1GHz, 1.4GHz-6GHz).....	16
7.2.1 Test Setup Diagram	16
7.2.2 E.U.T. Operation	16
7.2.3 Test Mode Description	16
7.2.4 Test Condition and Results:	16
8 Test Setup Photo.....	17
9 EUT Constructional Details (EUT Photos).....	19

4 General Information

4.1 Details of E.U.T.

Power supply:	DC36V Test voltage:DC36V Sample No.: SHEM2504002615MD-M1
---------------	--

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
DC power supply	MCH	MCH-603A	-

4.3 Measurement Uncertainty & Decision Rule

Measurement Uncertainty:

No.	Item	Measurement Uncertainty (U_{Lab})	U_{CISPR}
1	Conducted Emission at mains port using AMN	3.4dB (9kHz to 150kHz)	3.8dB (9kHz to 150kHz)
		2.9dB (150kHz to 30MHz)	3.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	2.2dB (9kHz to 30MHz)	2.9dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.6dB (150kHz to 30MHz)	5.0dB (150kHz to 30MHz)
4	Radiated Power	3.4dB (30MHz to 300MHz)	4.5dB (30MHz to 300MHz)
5	Radiated emission	5.7dB (30MHz-1GHz)	6.3dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)	5.2dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)	5.5dB (6GHz-18GHz)
6	Radiated disturbance (disturbance current in a LLAS)	2.6dB (9kHz to 30MHz)	3.3dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Decision Rule:

• CISPR 16-4-2 for emission measurements is as below described.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

U_{LAB} less than U_{CISPR} , therefore:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 EMS Monitor

Visual: Monitor the work status

5 Equipment List

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2024/12/18	2025/12/17
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2024/07/31	2025/07/30
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2023/09/03	2025/09/02
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM202-1	2025/04/12	2027/04/11
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Pre-amplifier	HP	8447D	SHEM236-1	2024/12/18	2025/12/17
Pre-amplifier	HP	8447D	SHEM143-1	2024/12/18	2025/12/17
RE test Cable	/	/	SHEM217-2	2024/12/18	2025/12/17
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2024/05/06	2027/05/05

Electrostatic Discharge					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2024/07/31	2025/07/30
Electrostatic Discharge Simulator	3CTEST	EDS20H	SHEM199-1	2024/12/18	2025/12/17
Electrostatic discharge simulator	EM TEST	dito	SHEM289-1	2025/02/10	2026/02/09

Radiated Immunity (80MHz-1GHz, 1.4GHz-6GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2024/12/18	2025/12/17
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2024/07/31	2025/07/30
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-4	2024/07/31	2025/07/30
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2024/12/18	2025/12/17
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2024/12/18	2025/12/17
Amplifier	Rohde & Schwarz	BBA150-E60	SHEM171-1	2024/12/18	2025/12/17
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2024/07/31	2025/07/30
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2024/08/16	2025/08/15
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-5	2024/12/18	2025/12/17



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250400261501

Page: 8 of 20

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Atmospheric Pressure Meter	Nanjing XiangRuiDe	DYM3	SHEM082-2	2024-01-18	2027-01-17
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-9~10	2024-12-22	2025-12-21
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-5	2024-07-13	2025-07-12
Digital Temperature& humidity recorder	Jianda Renke	RS-WS-N01-6J	SHEM247-1~8	2025-01-06	2026-01-05
Digital Multimeter	FLUKE	17B+	SHEM271-7	2024-07-13	2025-07-12
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	317	SHEM001-2	2024-10-30	2025-10-29

6 Emission Test Results

6.1 Radiated Emissions (30MHz-1GHz)

Test Requirement: EN IEC 61000-6-3: 2021

Test Method: CISPR 16-2-3: 2016 +A1:2019 +A2:2023

Measurement Distance: 3m

Limit:

Test Distance: 10m

30MHz-230MHz 30 dB(μ V/m) quasi-peak

230MHz-1GHz 37 dB(μ V/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to 1000MHz

Test Distance: 3m

30MHz-230MHz 40 dB(μ V/m) quasi-peak

230MHz-1GHz 47 dB(μ V/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to 1000MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Normal working_keep the EUT working continual

6.1.3 Test Setup Diagram

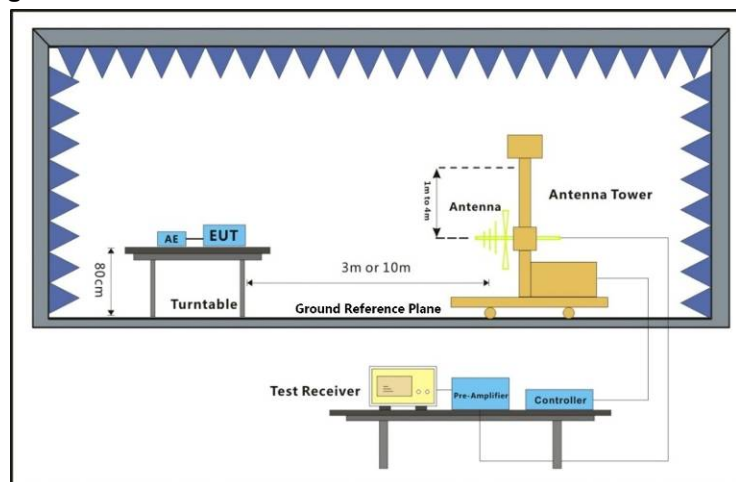



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250400261501

Page: 10 of 20


6.1.4 Measurement Procedure and Data

Frequency range: 30MHz-1GHz

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. The red line show in graphic is the limit in standard used in this section.

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Test Mode: 00; Polarity: Horizontal

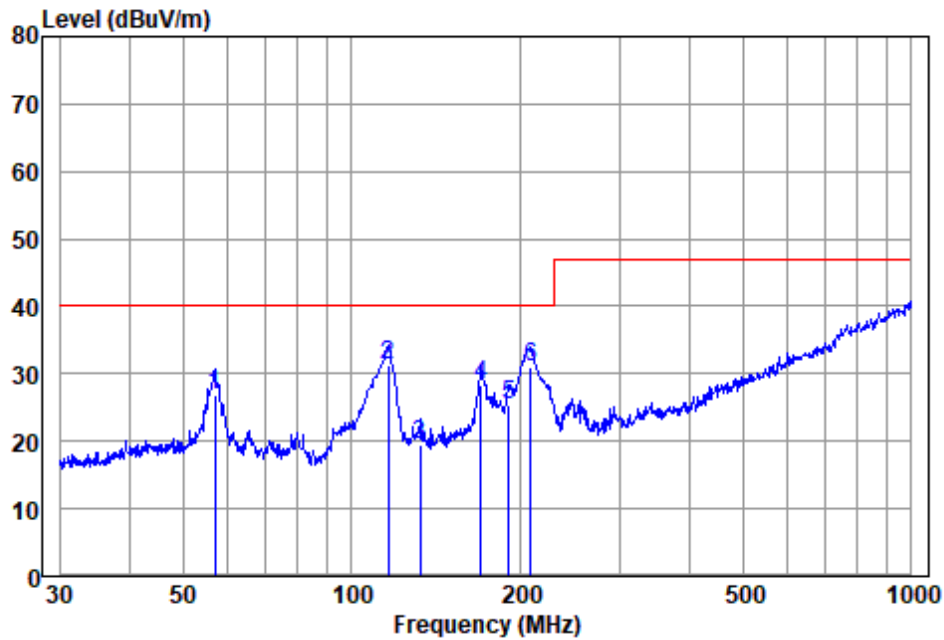

Antenna Polarity :HORIZONTAL


EUT/Project :2615MD

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	56.991	45.05	13.50	1.49	33.20	26.84	40.00	-13.16	QP
2	116.132	51.18	10.90	2.22	33.13	31.17	40.00	-8.83	QP
3	132.221	37.74	12.20	2.59	33.06	19.47	40.00	-20.53	QP
4	170.195	45.86	12.60	2.83	33.00	28.29	40.00	-11.71	QP
5	190.405	44.95	10.56	2.90	33.00	25.41	40.00	-14.59	QP
6	208.580	51.01	9.83	3.05	32.96	30.93	40.00	-9.07	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

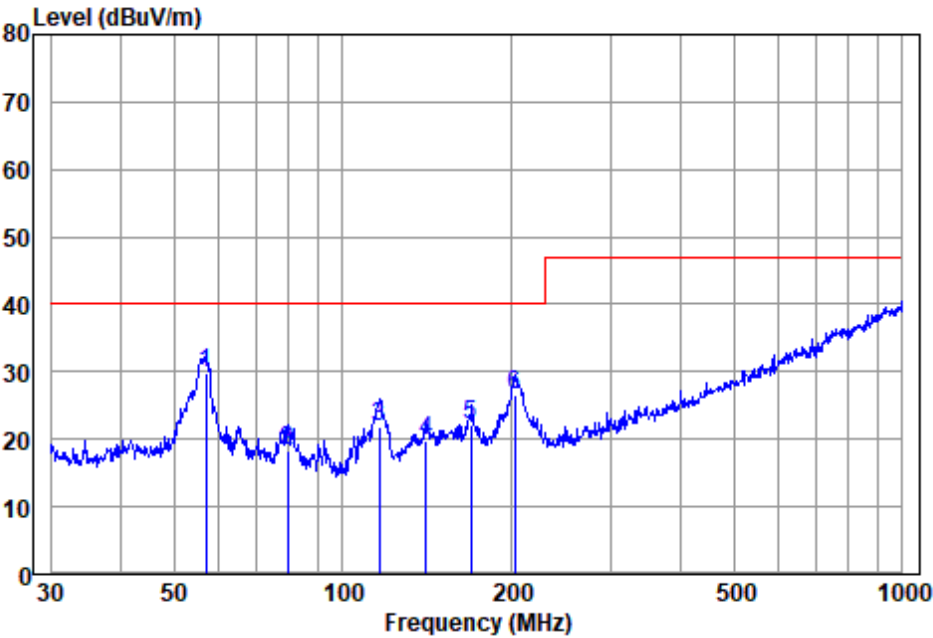

Antenna Polarity :VERTICAL
 EUT/Project :2615MD
 Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	56.991	47.98	13.50	1.49	33.20	29.77	40.00	-10.23	QP
2	79.800	40.43	9.07	1.89	33.20	18.19	40.00	-21.81	QP
3	116.132	41.94	10.90	2.22	33.13	21.93	40.00	-18.07	QP
4	140.835	37.04	13.10	2.66	33.03	19.77	40.00	-20.23	QP
5	169.599	39.46	12.70	2.84	33.00	22.00	40.00	-18.00	QP
6	202.810	46.57	9.94	3.01	32.99	26.53	40.00	-13.47	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7 Immunity Test Results

Performance Criteria Description in EN IEC 61000-6-1:2019


Criterion A	The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. If the performance level is not specified by the manufacturer, this may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.
Criterion B	The EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. However, during the test degradation of performance is allowed but no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.
Criterion C	Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls.

7.1 Electrostatic Discharge

Test Requirement: EN IEC 61000-6-1: 2019

Test Method: EN 61000-4-2:2009

7.1.1 Test Setup Diagram

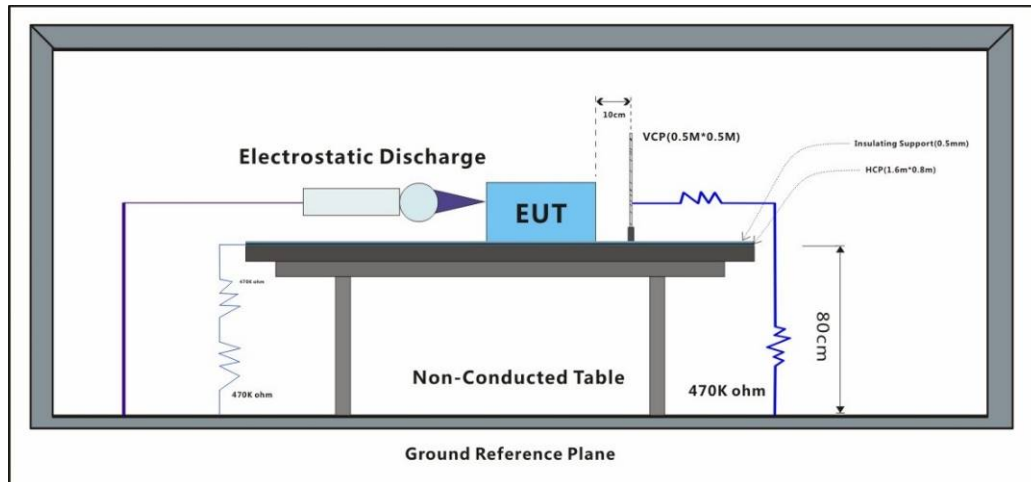

7.1.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.1.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Normal working_keep the EUT working continual

7.1.4 Test Condition and Results:

Performance Criterion: B

Discharge Impedance: 330Ω/150pF

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Test Point: 1. All insulated enclosure and seams.

2. All accessible metal parts of the enclosure.

3. All side



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250400261501

Page: 15 of 20

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A


A: No degradation in the performance of the EUT was observed

7.2 Radiated Immunity (80MHz-1GHz, 1.4GHz-6GHz)

Test Requirement: EN IEC 61000-6-1: 2019

Test Method: EN IEC 61000-4-3: 2020

7.2.1 Test Setup Diagram

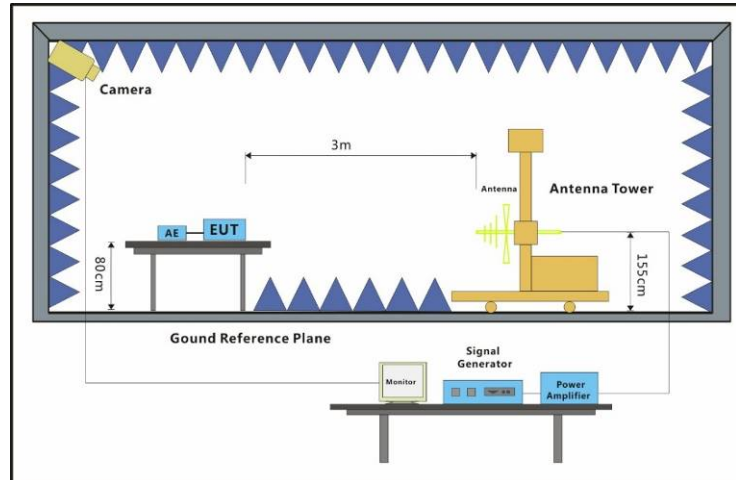

7.2.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.2.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Normal working_keep the EUT working continual

7.2.4 Test Condition and Results:

Performance Criterion:A

Antenna Polarisation:Vertical and Horizontal

Modulation:1kHz,80% Amp. Mod,1% increment

Frequency Range:80MHz to 1GHz, 1.4GHz to 6GHz

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A
80MHz-1GHz	3	Top	3s	A
80MHz-1GHz	3	Underside	3s	A
1.4GHz-6GHz	3	Front	3s	A
1.4GHz-6GHz	3	Back	3s	A
1.4GHz-6GHz	3	Left	3s	A
1.4GHz-6GHz	3	Right	3s	A
1.4GHz-6GHz	3	Top	3s	A
1.4GHz-6GHz	3	Underside	3s	A

A: No degradation in the performance of the EUT was observed

8 Test Setup Photo



Radiated Emissions (30MHz-1GHz)



Electrostatic Discharge





Radiated Immunity (80MHz-1GHz, 1.4GHz-6GHz)

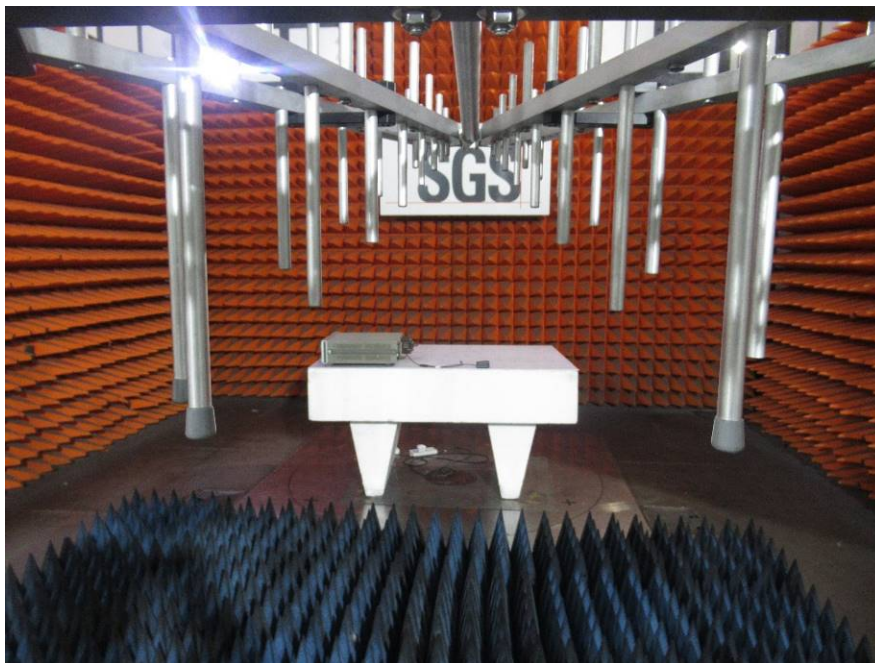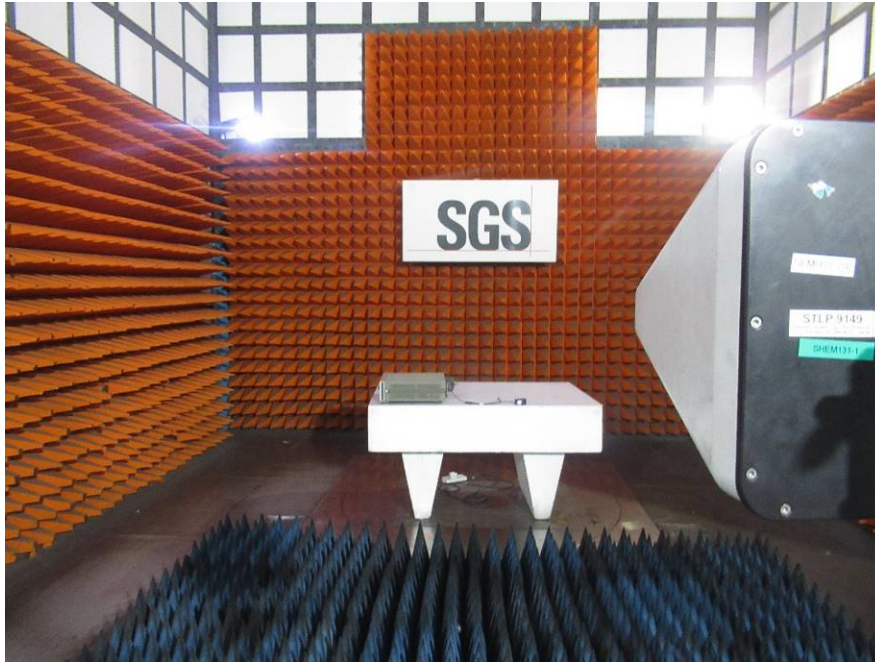

9 EUT Constructional Details (EUT Photos)



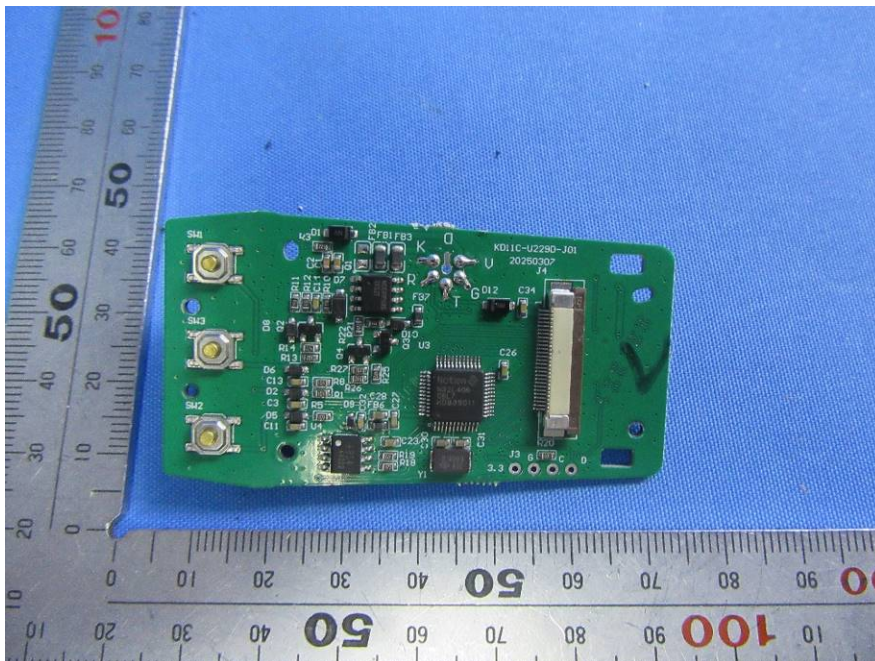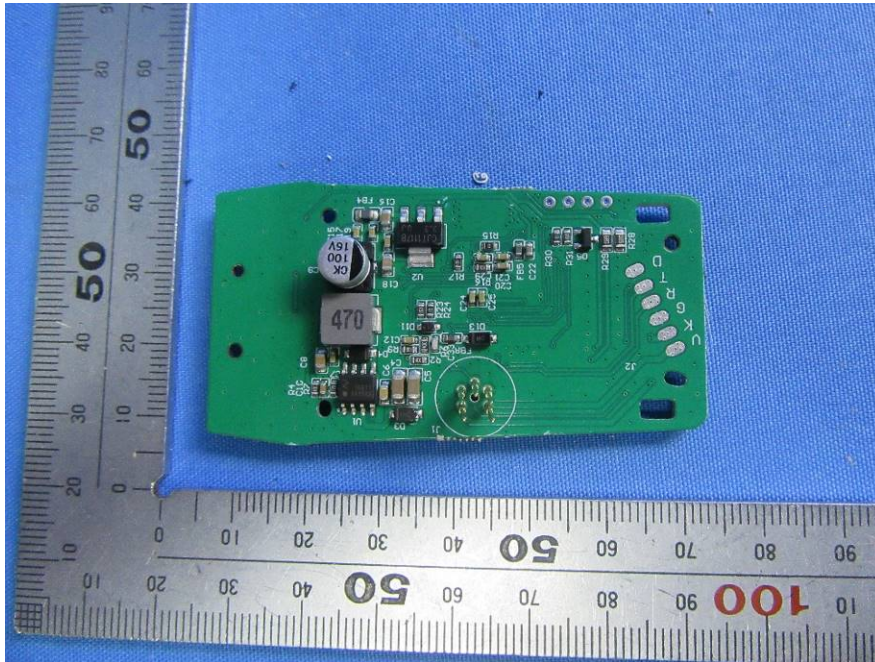

- End of the Report -