




# RACK TYPE LITHIUM ENERGY STORAGE BATTERY

**MADE IN INDIA**

## Connection Diagram

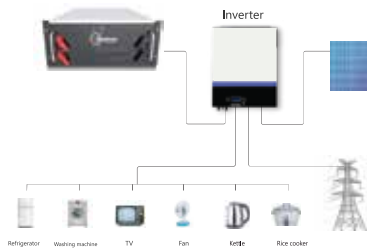

## Certifications



## Applications

- Telecom
- UPS
- Emergency Light
- Solar System
- Wind Power

## Product Specifications

Model	ES51.2-100BS	ES51.2-400BS
Array Mode	16S	16S x4 (Module)
Nominal Energy (kWh)	5.1	20.0
Nominal Voltage (V)	51.2	
Charge Voltage (V)	58.4	
Discharge Cut-off Voltage (V)	42	
Standard Charging Current(A)	20	20x4
Max. Continuous Charging Current (A)	100	100x4
Max. Continuous Discharging Current (A)	100	100x4
Cycle Life	6000 Cycle @80% DOD @25°C @0.2C/0.2C	
Communication Mode	RS485/CAN	
Operating Temp	Charging: 0~60°C; Discharging: -10°C~65°C	
Size(LxWxH) mm	520x495x175	600x600x1000 (with cabinet)
Net Weight (kg)	~44	~200
Gross Weight (kg)	~46	~210
Warranty	5 Years	
Altitude	≤4000m	
Humidity	<90%RH	
Shelf Temperature	10°C~60°C	
Design Life	10+ Years at 25°C/77°F	

## Introduction

Optimize your Energy Solution with our Rack-Type Energy Storage. Featuring advanced warning functions for secure and dependable operation in all conditions.

## Product Features

- Standardized Design: Our 3U and 4U Standardized case ensures broad applicability.
- Enhanced Energy Capacity: Support multiple parallel battery usage to meet high energy demands.
- Intelligent Lithium Battery Management System: Equipped with RS485 communication, offers real-time battery monitoring and customizable protection parameters such as charge & discharge.
- Balancing: Automatic collection of battery single series voltage, pressure difference up to 30 Mega Volt (can be set) with an automatic start equalization function.
- Warning Function: Advanced warning functions, including Overcharge, Over-Discharge, Over-Current, High-Temperature and Low-Temperature alerts reducing potential safety risks.