



ARTLİNES DALLAS KARO HALI

TEKNİK ÖZELLİKLER


Boyut	:50 cm x 50 cm
İplik Türü Taban	:%100 PA
Türü	:PVC
İmek Yüksekliği	:4,0 mm ± 0,5 mm
Toplam Yükseklik	:6,5 mm ± 0,5 mm
İmek Ağırlığı	:450 g/m ² ± 10%
Toplam Ağırlık	:4700 g/m ² ± 10%
Alev Almazlık	:Euroclass Bfl-s1
İplik yapısı	:Bukle
Kutu İçi Karo Adeti	:20 adet (5 m ²)

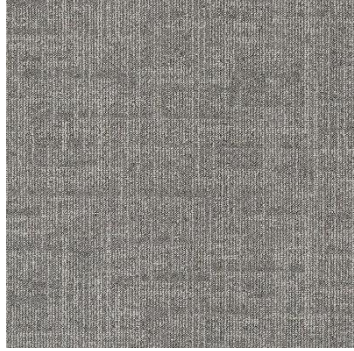

Dallas 01

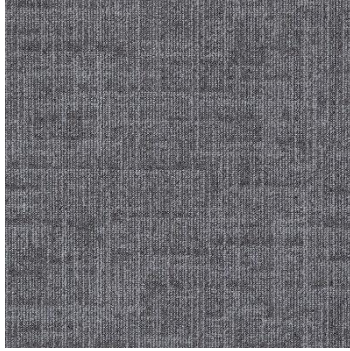

Dallas 02

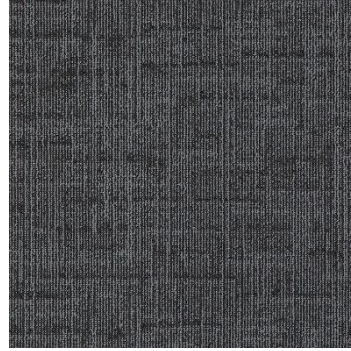

Dallas 03



Dallas 04

Testing

CRI Green Label Plus		GLP1879
Colorfastness to Light	AATCC 16-03	Rating 5.0
Colorfastness to Water	AATCC 107-02	Rating 5.0
Colorfastness to Cleaning	AATCC 138-00	Rating 5.0
Colorfastness to Crocking	AATCC 165-99	Rating 5.0
Stain Resistance	AATCC 175-03	Rating 10
Compression force deflection	ASTM D 3574	80.7 Lbs/inch ²
Smoke density (flaming)	ASTM E 662	102
Smoke density (non-flaming)	ASTM E 662	424
Loose laid	BS 4790-1987	Low Radius
Edge Ravel	ASTM D 7267	0.5 Lbs
Surface Flammability	ASTM D 2859	DOC FF 1-70
Radiant Flux	ASTM E 648	Class I
Tuft bind	ASTM D 1335	10.6Lbs
AACHEN dimensional stability	ASTM D 7570	MT4: 0.091% CT4:0.008%
Electrostatic propensity	AATCC 134	0.5kv
Accelerated soiling	ASTM D 6540	Rating 5.0