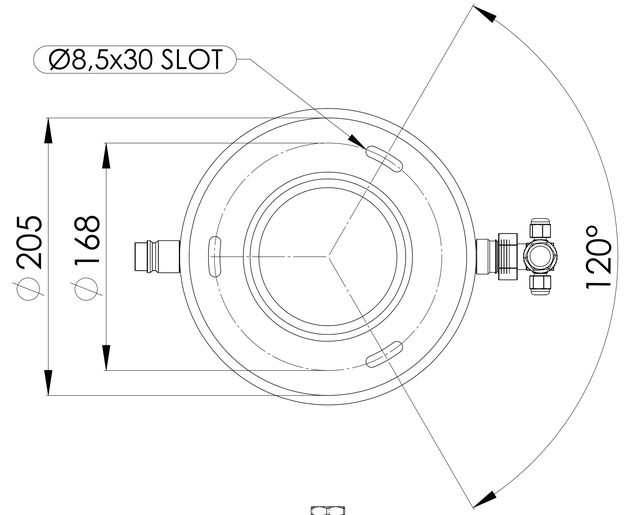

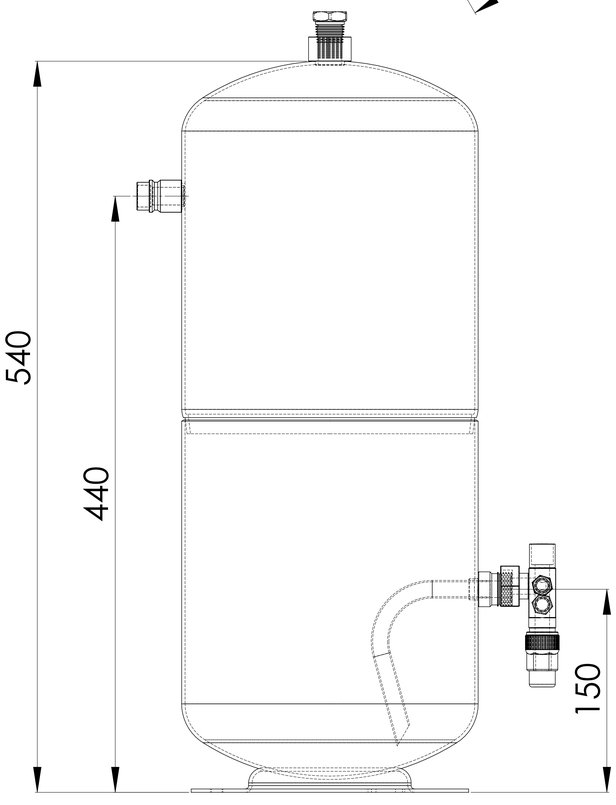

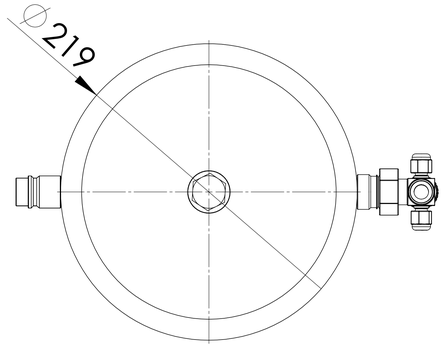

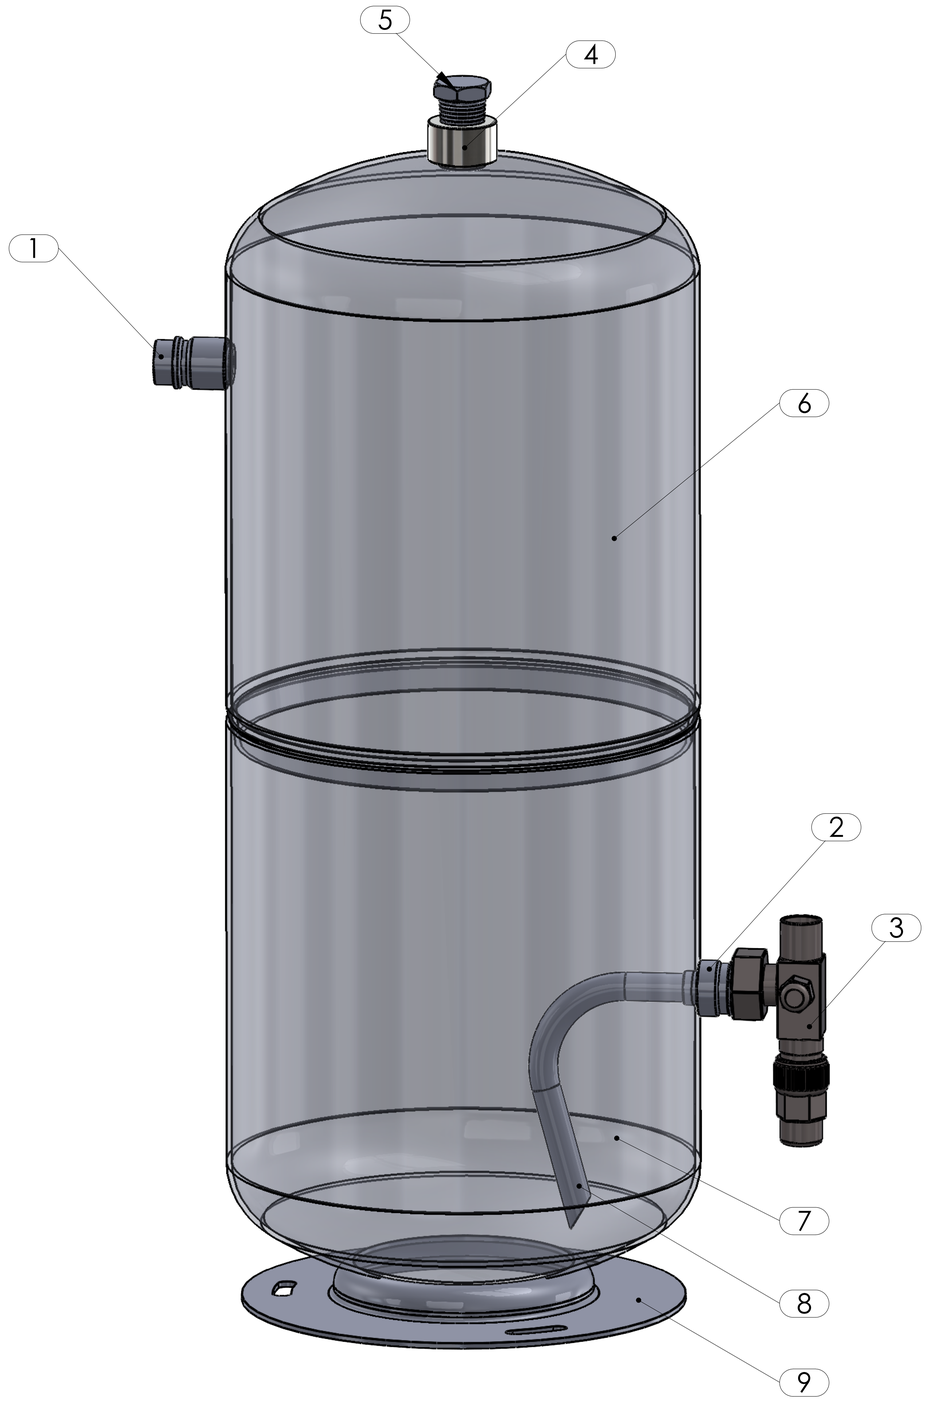

GÜVEN SOĞUTMA
ÜNİTELERİ SAN. VE TİC. A.Ş.

Add.: Hastane Mah. Hadımköy Istanbul Cd. No:78/1
34555, Arnavutköy, İstanbul, TURKEY
Tel: +90 212 771 51 12 - 771 51 13
Fax: +90 212 771 51 10
www.gvn.com.tr

SINCE 1985
REFRIGERATION COMPONENTS

GVN STANDART PRODUCT	**Customer**
VERTICAL LIQUID RECEIVER	**Product**
VLR.A.30b.18.B4.C4.F4	**Code**
	Customer Code

DESIGN DATA

Capacity [Lt.]	18 Lt.
Design Pressure [PS]	30 Bar
Pneumatic Test Pressure [PT]	33 Bar
Hydraulic Test Pressure	43 Bar
Design Temperature [TS]	Min.-20C / Max.+130C
Cooler Fluid Type	HFC-CFC-HCFC
Fluid Group	2
Category	CATII / D1
Desing Calculation	EN 14276-1/EN 13445-3
Welded Joint Efficiency	0 .85
Material Group (Shell / Head)	1.2
Testing Group	3b
Ndt	ACC. TO EN 14276-1
Packaging Size & Weight	00*00*00 & 00 Kg.
Drawed By	H.DALSIZ
Approved By	D.GÜL
Date	08.03.2021
Color	RAL 5009

MATERIAL DATA

No	Connection	Model	Code		Qty
1	Inlet Connection	ODS 5/8" H:33	106.060.B04.INL.T33		2
2	Outlet Connection	ROT. 1" H:25	106.060.A02.001.T25		1
3	Outlet Valve	RV.45b-5/8			1
4	Safety Valve Conn.	NPT 1/2" H:18	106.060.F04.NPT.T18		1
5	Blind Plug	NPT 1/2"Plug	106.130.F04.KTP.023		1
6	Deep Drawn	Ø219x2,5 H:265	203.180.001.001.001		1
7	Deep Drawn	Ø219x2,5 H:265	203.180.002.001.001		1
8	Pipe	Ø13x1 H:122,38	204.A13.010.000.150		1
9	Skirt With	Ø205x2,5 H:18	105.004.205.001.001		1

GENERAL NOTES

-Max. allowable operating pressure (PS) according to the temperature range;
1)Allowable operating temperature : min. -20C° / max. +130C° PS1 = 30 Bar
2)Allowable operating temperature : min. -20C° / max. -40C° PS2 = 22 Bar
-Unless otherwise specified dimensions in MM
-Unless otherwise specified do not scale
-Unless otherwise specified tube must be clean&free form burrs inside&outside&suitable for soldering
-Unless otherwise specified do not scale indicated thickness are min. after forming or machining
-Unless otherwise specified dimension tolerances according to EN 113445-4

REVISIONS

No	Details Of Change	Date	By
01	STANDART TEKNİK RESİM ÖLÇ. YAPILDI	13.09.2024	M.AKKAŞ
02			
03			

RELATED DRAWINGS

No	Description	Drawing No
01		
02		

No	Assembly Codes	Qty
2	M005.000029	1

ISO 9001 2015 CERTIFIED · CE PED 2014 / 68 / EU · EAC CERTIFICATE

We reserve all rights in this document and in the information contained therein.
Reproduction use or disclosure to third parties without express authority is strictly forbidden.