

IB050204

INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, M5x0.5 27long, Flush, Sn: 0.8, 10-30V DC, PNP NC, Cable 2m PUR (Polyurethane), IP67, Stainless steel 1.4305



MECHANICAL FEATURES

MECHANICAL FEATORES	
	IV000197
Active area material of sensor	Polyoxymethylene (POM)
Ambient temperature	-25 °C 70 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Material of cable sheath	PUR (Polyurethane)
Max. tightening torque	1.5 Nm
Mechanical mounting condition for sensor	Flush
Number of cores	3
Pressure-proof	-
Sensor length	27 mm
Thread length	18 mm
Thread pitch	0.5 mm
Thread size, metric	5

ELECTRICAL FEATURES

ELECTRICAL FEATORES	
Cascadable	-
Correction factor (aluminum)	0.3
Correction factor (brass)	0.4
Correction factor (copper)	0.2
Correction factor (St37)	1
Correction factor (stainl. steel)	0.7
Hysteresis	15 %
No-load current	5.5 mA
Norm measuring plate	5x5x1
Rated switching current	200 mA
Relative repeat accuracy	10 %
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V 30 V



ELECTRICAL FEATURES

Switching distance	0.8 mm
Switching frequency	2000 Hz
Type of electrical connection	Cable
Type of switching function	Normally closed contact
Type of switching output	PNP
Voltage drop	1.5 V
Voltage type	DC
With LED display	+
With monitoring function of downstream devices	-


Other

Packaging dimensions	100mm x 17.0mm x 120mm
Shipping weight	0.02kg
Tariff code	85365019


Classification

Classification		
ipf product group	203	
eClass 8.0	27270101	
eClass 9.0	27270101	
eClass 9.1	27270101	
ETIM-5.0	EC002714	
ETIM-6.0	EC002714	
ETIM-7.0	EC002714	

Connection



Dimensional drawing

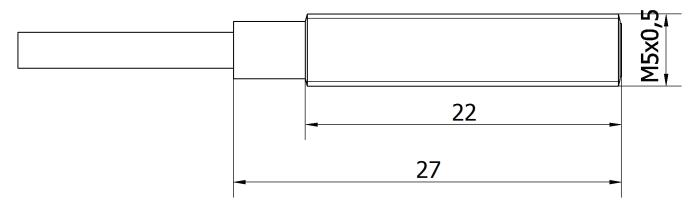

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal





Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.