

IB080189

INDUCTIVE SENSORS • WELDING-PROOF

sensor inductive, M8x1 60long, Flush, Sn: 1.5, 10-30V DC, PNP NO, Connector M8 3pin, IP67, Stainless steel 1.4305 Teflon coated, welding-proof, factor 1



MECHANICAL FEATURES

Active area material of sensor	PBT
Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 80 °C
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing coating	Teflon coated
Housing material	Stainless steel 1.4305
Material independent sensors (factor 1)	+
Mechanical mounting condition for sensor	Flush
Pressure-proof	-
Sensor length	60 mm
Thread pitch	1 mm
Thread size, metric	8

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	10 %
Interference resistance to magnetic fields	Immune against magnetic AC-field
No-load current	20 mA
Norm measuring plate	8x8x1
Number of pins	3
Rated switching current	200 mA
Relative repeat accuracy	10 %
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	1.5 mm
Switching frequency	20000 Hz
Type of electrical connection	Connector M8
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2.5 V

ELECTRICAL FEATURES

Voltage type	DC
With monitoring function of downstream devices	-

OTHER FEATURES

Welding area	+
Welding-proof sensors	+


Other

Packaging dimensions	100mm x 17.0mm x 120mm
Shipping weight	0.02kg
Tariff code	85365019

Classification

ipf product group	207
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

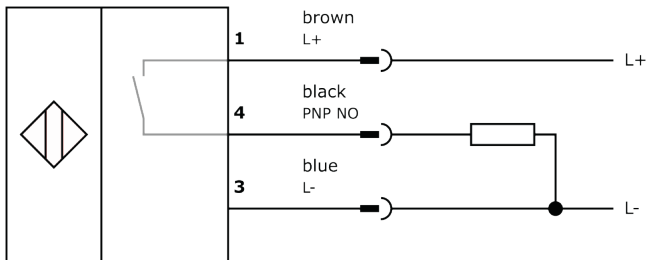

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.