

## KN32A866

### CAPACITIVE SENSORS • ENLARGED AMBIENT TEMPERATURE

Capacitive proximity switches are contact-free sensors. They detect metallic and non-metallic objects, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material, its dimensions and the response sensitivity, which is set via a potentiometer. The vibration-resistant sensors can be approached laterally or frontally. Capacitive proximity switches are used for presence detection (e.g. sealing detection), positioning (e.g. PET bottles), counting (e.g. plastic caps), level detection (e.g. lubricant) or distance measurements (e.g. thickness measurement) of solid and liquid materials.



#### MECHANICAL FEATURES

Active area material of sensor	PTFE
Ambient temperature	-25 °C ... 90 °C
Cable length	5 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel (V2A)
Increased ambient temperatures > 80°C	+
Material of cable sheath	PUR (Polyurethane)
Mechanical mounting condition for sensor	Non-flush
Number of cores	5
Pressure-proof	-
Sensor length	80 mm
Thread pitch	1.5 mm
Thread size, metric	32
Wire cross section	0.34 mm <sup>2</sup>

#### ELECTRICAL FEATURES

Cascadable	-
Max. output current	200 mA
No-load current	15 mA
Number of switching outputs	2
Rated control supply voltage $U_s$ at DC	10 V ... 30 V
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	20 mm
Switching distance	3 mm ... 30 mm
Switching frequency	50 Hz
Type of electrical connection	Cable
Type of switching function	Exclusive-OR
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	+

## ELECTRICAL FEATURES

With monitoring function of downstream devices

-

## OTHER FEATURES

Level detection

+

Level detection of synthetic granules for injection molding machines

+

## Other

Packaging dimensions

138.0mm x 95.0mm x 210mm

Shipping weight

0.72kg

Tariff code

85365019

## Classification

ipf product group

700

eClass 8.0

27270102

eClass 9.0

27270102

eClass 9.1

27270102

ETIM-5.0

EC002715


ETIM-6.0

EC002715

ETIM-7.0

EC002715

## Connection

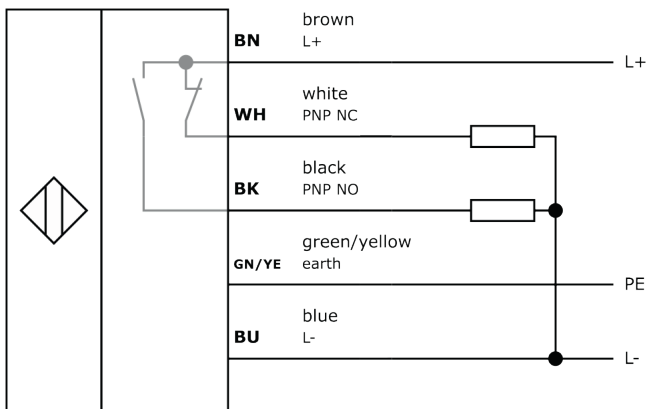

## Dimensional drawing

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Software

Please download the software or driver required for operating your new device on our homepage: [www.ipf.de](http://www.ipf.de)

## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.