

## SL450020

### FLOW SENSORS • SENSORS FOR AIR

sensor air flow, Calorimetric, 78x160x50mm, G1 inch, 24V DC, 4-20mA, Plug-in connection M12, PA, Pressure resistance 3bar



#### MECHANICAL FEATURES

Degree of protection (IP) of evaluation electronics	IP67
Degree of protection (IP) of measuring head	IP67
Depth	160 mm
Design	Cuboid
Height	78 mm
Housing material	PA
Length	160 mm
Measuring range of flow velocity with air (MAX)	30 m/s
Measuring range of flow velocity with air	0.5 m/s ... 80 °C
Pressure resistance	3 bar
Sensing element material	Stainless steel 1.4305
Thread length	107 mm
Type of process connection	G1 inch
Width	50 mm

#### ELECTRICAL FEATURES

Adjustable responding value for flow for gases	0.5 m/s ... 30 m/s
Air conditioning / ventilation systems	+
Measuring principle of flow	Calorimetric
No-load current	80 mA
Operating voltage	24 V ... 24 V
Pressure resistance of measuring head	3 bar
Readiness delay	90 ms
Residual ripple	15 %
Type of analog output	4 mA ... 20 mA
Type of electrical connection	Plug-in connection M12
Voltage type	DC
With LED display	+

#### OTHER FEATURES

For pneumatic applications	+
Suitable for gases	+
Suitable for liquids	-


## Other

Packaging dimensions	125.0mm x 89.0mm x 205.0mm
Shipping weight	0.56kg
Tariff code	90268020

## Classification

ipf product group	300
eClass 8.0	27371815
eClass 9.0	27371815
eClass 9.1	27371815
ETIM-5.0	EC002580
ETIM-6.0	EC002580
ETIM-7.0	EC002580

## Connection

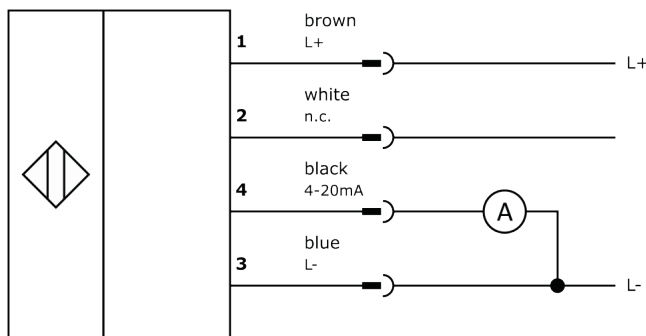

## Dimensional drawing

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: [www.ipf-electronic.com](http://www.ipf-electronic.com)

## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.