



# ER14500

**Lithium Thionyl Chloride Battery [Bobbin Type]**  
**Li/SOCl<sub>2</sub> 3.6V**



## • Electrical Specification

<b>Nominal Capacity[1mA~2V]</b>	<b>2.6Ah</b>
<i>The discharge capacity of battery depends on the environment temperature and the terminated voltage of the battery.</i>	
<b>Nominal Voltage</b>	<b>3.6V</b>
<b>Maximum Continuous Current</b>	<b>50mA</b>
<b>Maximum Pulse Current</b>	<b>100mA</b>
<i>Under temperature of 23±2°C, the battery starts to discharge with 10µA base current. The battery releases one pulse 100mA/0.1secs every 2 minutes during its discharging and the battery voltage shall not be less than 2.7V. The voltage value depends on pulse characteristics, temperature and the usage of the batteries.</i>	
<b>Weight</b>	<b>19g</b>
<b>Operating Temperature</b>	<b>-55°C ~ +85°C</b>

## • Advantages


- High energy density over 620wh/kg [highest among all the chemical batteries]
- Open circuit voltage ≥ 3.65V, and operating voltage ranging from 3.3~3.6V
- Wide operating temperature range: -55°C ~ +85°C
- Long storage life over 10 years [under normal room temperature]
- Suitable to operate under long-term tiny current with stable voltage

## • Main Applications




**Customer Satisfaction is the Purpose We Always Adhere to,  
Continuous Improvement is the Direction We Always Pursue!**



**Typical Discharge Profiles at +23±2°C**

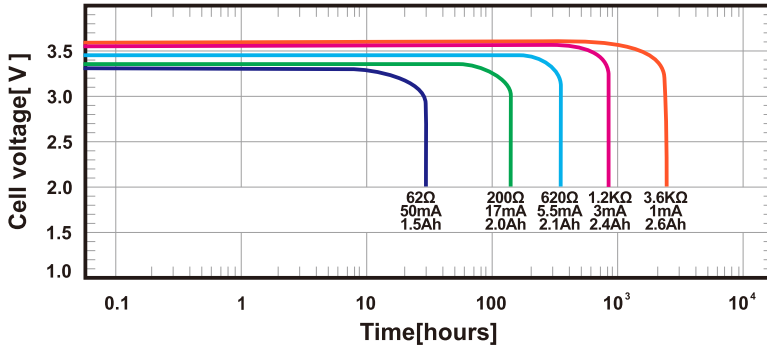

**Restored Capacity Versus Current and Temperature [2.0V cut-off]**

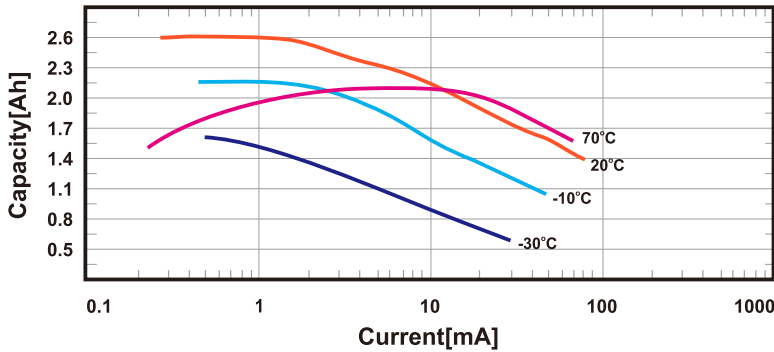

**Voltage Plateau Versus Current and Temperature**

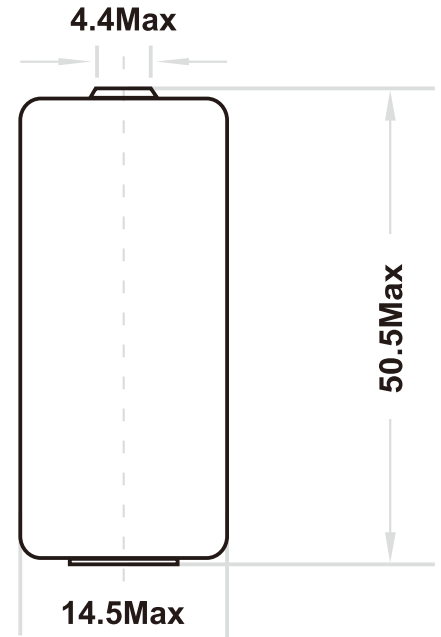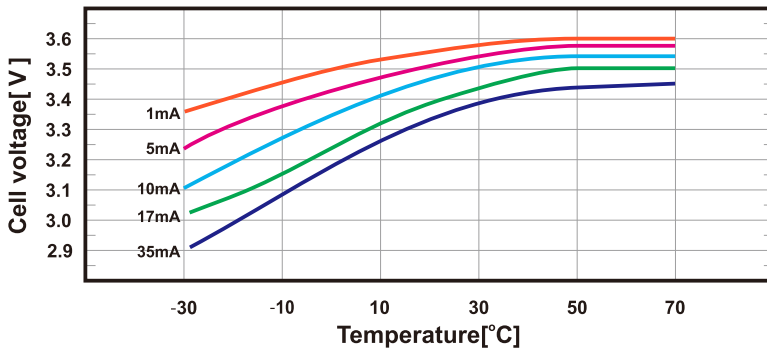

## Available Terminations

- S: Standard Termination
- T: Solder Tabs
- P: Axial Pins
- Customized terminations are available

## Warning

- Do not expose the battery to open flame, inflammable and explosive articles.
- Do not recharge, short-circuit, disassemble, incinerate the battery or heat the battery to more than 100°C.
- Do not use the battery beyond the permitted temperature range.