

IPC523-F455-NR050-TU

4.0MP HD 55x Optical & Thermal Bi-spectrum PTZ Camera



Features

Excellent Image Quality

- Vanadium oxide uncooled focal plane arrays Thermal Sensor
- 4.0 Megapixel 1/2.8" Progressive Scan CMOS Sensor
- High definition and smooth picture, 1080p@60fps (Optical)
- H.265 video codec, saves up to 50% bandwidth and storage
- Ultra low illumination, 0.001Lux with color picture
- 120dB Ultra WDR
- Laser automatically adjusts
- HLC / 3D noise reduction

Thermal Module

- High sensitivity thermal module, 800 x 600@30fps (IPC523-F455-NR050)
- Up to 9 palettes of adjustable color

Intelligent Functions

- Motion detection / Tampering / Guard line / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge / Auto / Smart Tracking

Long Operation Lifespan

- Industrial components, withstands operation temperatures of -40°C ~ 70°C
- IP66, TVS 6000V lightning protection, surge protection and voltage transient protection

Large Scale


- 55x optical zoom

Abundant Functions and Features

- SD card optional, supports Automatic Network Replenishment (ANR)
- Up to 3 video streams
- Bi-directional audio / alarm in and out / video out
- Wiper supported

Dimensions

Units: mm

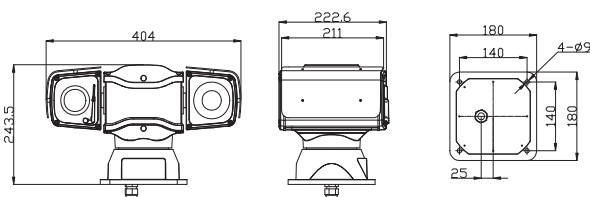

Specifications

IPC523-F455-NR050-TU	
Thermal Module	
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Lens	50mm
Detector Pitch	17µm
Temperature Measuring Range	-20°C +170°C
NETD	< 40mk (@25°C, F#=1.0)
Resolution	800 x 600
Response Waveband	8µm ~ 14µm
Color mode	up to 9 modes
Optical Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Pixels	4.0 Megapixel
Min. Illumination	Color: 0.001Lux @ (F1.2, AGC ON) B/W: 0.0001Lux @ (F1.2, AGC ON); 0Lux with IR
Shutter Speed	1 ~ 1/30,000S
Day / Night	Auto (ICR) / Color / B/W
Wide Dynamic Range	Ultra WDR, >=120dB
S/N Ratio	>55dB
White Balance	Auto / Manual
Gain Control	Auto / Manual
Backlight Compensation	Off / WDR / BLC / HLC
Lens	
Focal Length	6.6 ~ 363mm, 55x optical
Zoom Speed	Approx 4s (Optical)
Angle of View	43.8° ~ 1° (Wide-Tele)
Min. Object Distance	300 ~ 1500mm (Wide-Tele)
Max. Aperture Ratio	F1.6 (Wide) / F6.0(Tele)
Focus Control	Auto / Manual / Semi-Automatic
Pan and Tilt	
Pan / Tilt Range	360° Endless / - 85° ~ 85° (Auto Flip)
Pan / Tilt Speed	Pan manual speed: 0.1° ~ 120°/s; Pan preset speed: 120°/s Tilt manual speed: 0.1° ~ 30°/s; Tilt preset speed: 100°/s
Proportional Zoom	Pan / Tilt speed can be adjusted automatically according to zoom multiples
Preset	300
Patrol	8 Patrols scheme, up to 32 presets per patrol
Pattern Scan	4 Scan paths, each path can record 10 minutes of operation path
Power-off Memory	Power-off memory / Power-on recovery
Auto Guard	Path / Preset / Pan scan
PT Limit	Manual / Scan / Pan
3D Positioning	PTZ control with mouse click and drag
Wiper	Supported
Video	
Compression Format	H.265 / H.264 / MJPEG
Image Resolution	2560x1440
Frame Rate	Main stream: 2560x1440@30fps Secondary stream: 1080p@30fps
Bitrate	32kbps ~ 16Mbps
Bitrate Control	VBR / CBR
Multi stream	Supported
Caption	Date and time / Alarm / Direction / Customized
Privacy Masking	Up to 4 zones
Motion Detection	Up to 4 zones
Video Freeze	Supported
ROI	Supported
Digital Noise Reduction	3D noise reduction
Defog	Supported
Image Flip	Flip / Mirror
Audio	
Compression	G.711a / G.711u / ADPCM / G.722 / G.722.1c / G.726
Bitrate	32kbps ~ 64kbps
Audio Function	Bi-directional audio / AEC / Mixed audio recording / Dumb / Mute
Network	
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, VSIP, UPnP, 802.1x, NAT, QoS, SMTP, IPv4, IPv6 (optional)
User Interface	IPC Control (IE, Firefox, Chrome)
Max. User Access	Max. 10 Users (include 2 internal)
Application Programming	ONVIF (Profile S, Profile G), GB/T 28181-2011, API, CGI
Automatic Network Replenishment (ANR)	Supported
Alarm	
Alarm Triggers	Alarm input / Network disconnect / Disk full / Disk error
Intelligent	Motion detection / Tampering / Guard line / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge / Auto / Smart Tracking
Alarm Events	Alarm report / Recording / Text overlay / Snapshot / External output / Email notice / Acoustic alarm
Interfaces	
Ethernet	10/100M, RJ45 interface
Audio In / Out	1 x Line in / 1 x Line out
Control	1 x RS485
Alarm In / Out	1 x Input / 1 x Output
Video Out	1 x BNC, 1.0V [p-p] / 75Ω
Memory Slot	Built-in Micro SD card (optional), up to 128GB
Environmental	
Operating Temperature	-40°C ~ 70°C / -40°F ~ 158°F
Operating Humidity	10% ~ 95%
Protection Level	IP66, TVS 6000V lightning protection, surge protection and voltage transient protection
Electrical	
Power	24V AC / 3A (Power adapter included)
Power Consumption	Max. 70W (Laser on)
Mechanical	
Weight	10kg / 22lb (Gross Weight)
Dimensions	404 x 222.6 x 243.5mm / 15.9" x 8.76" x 9.59"