

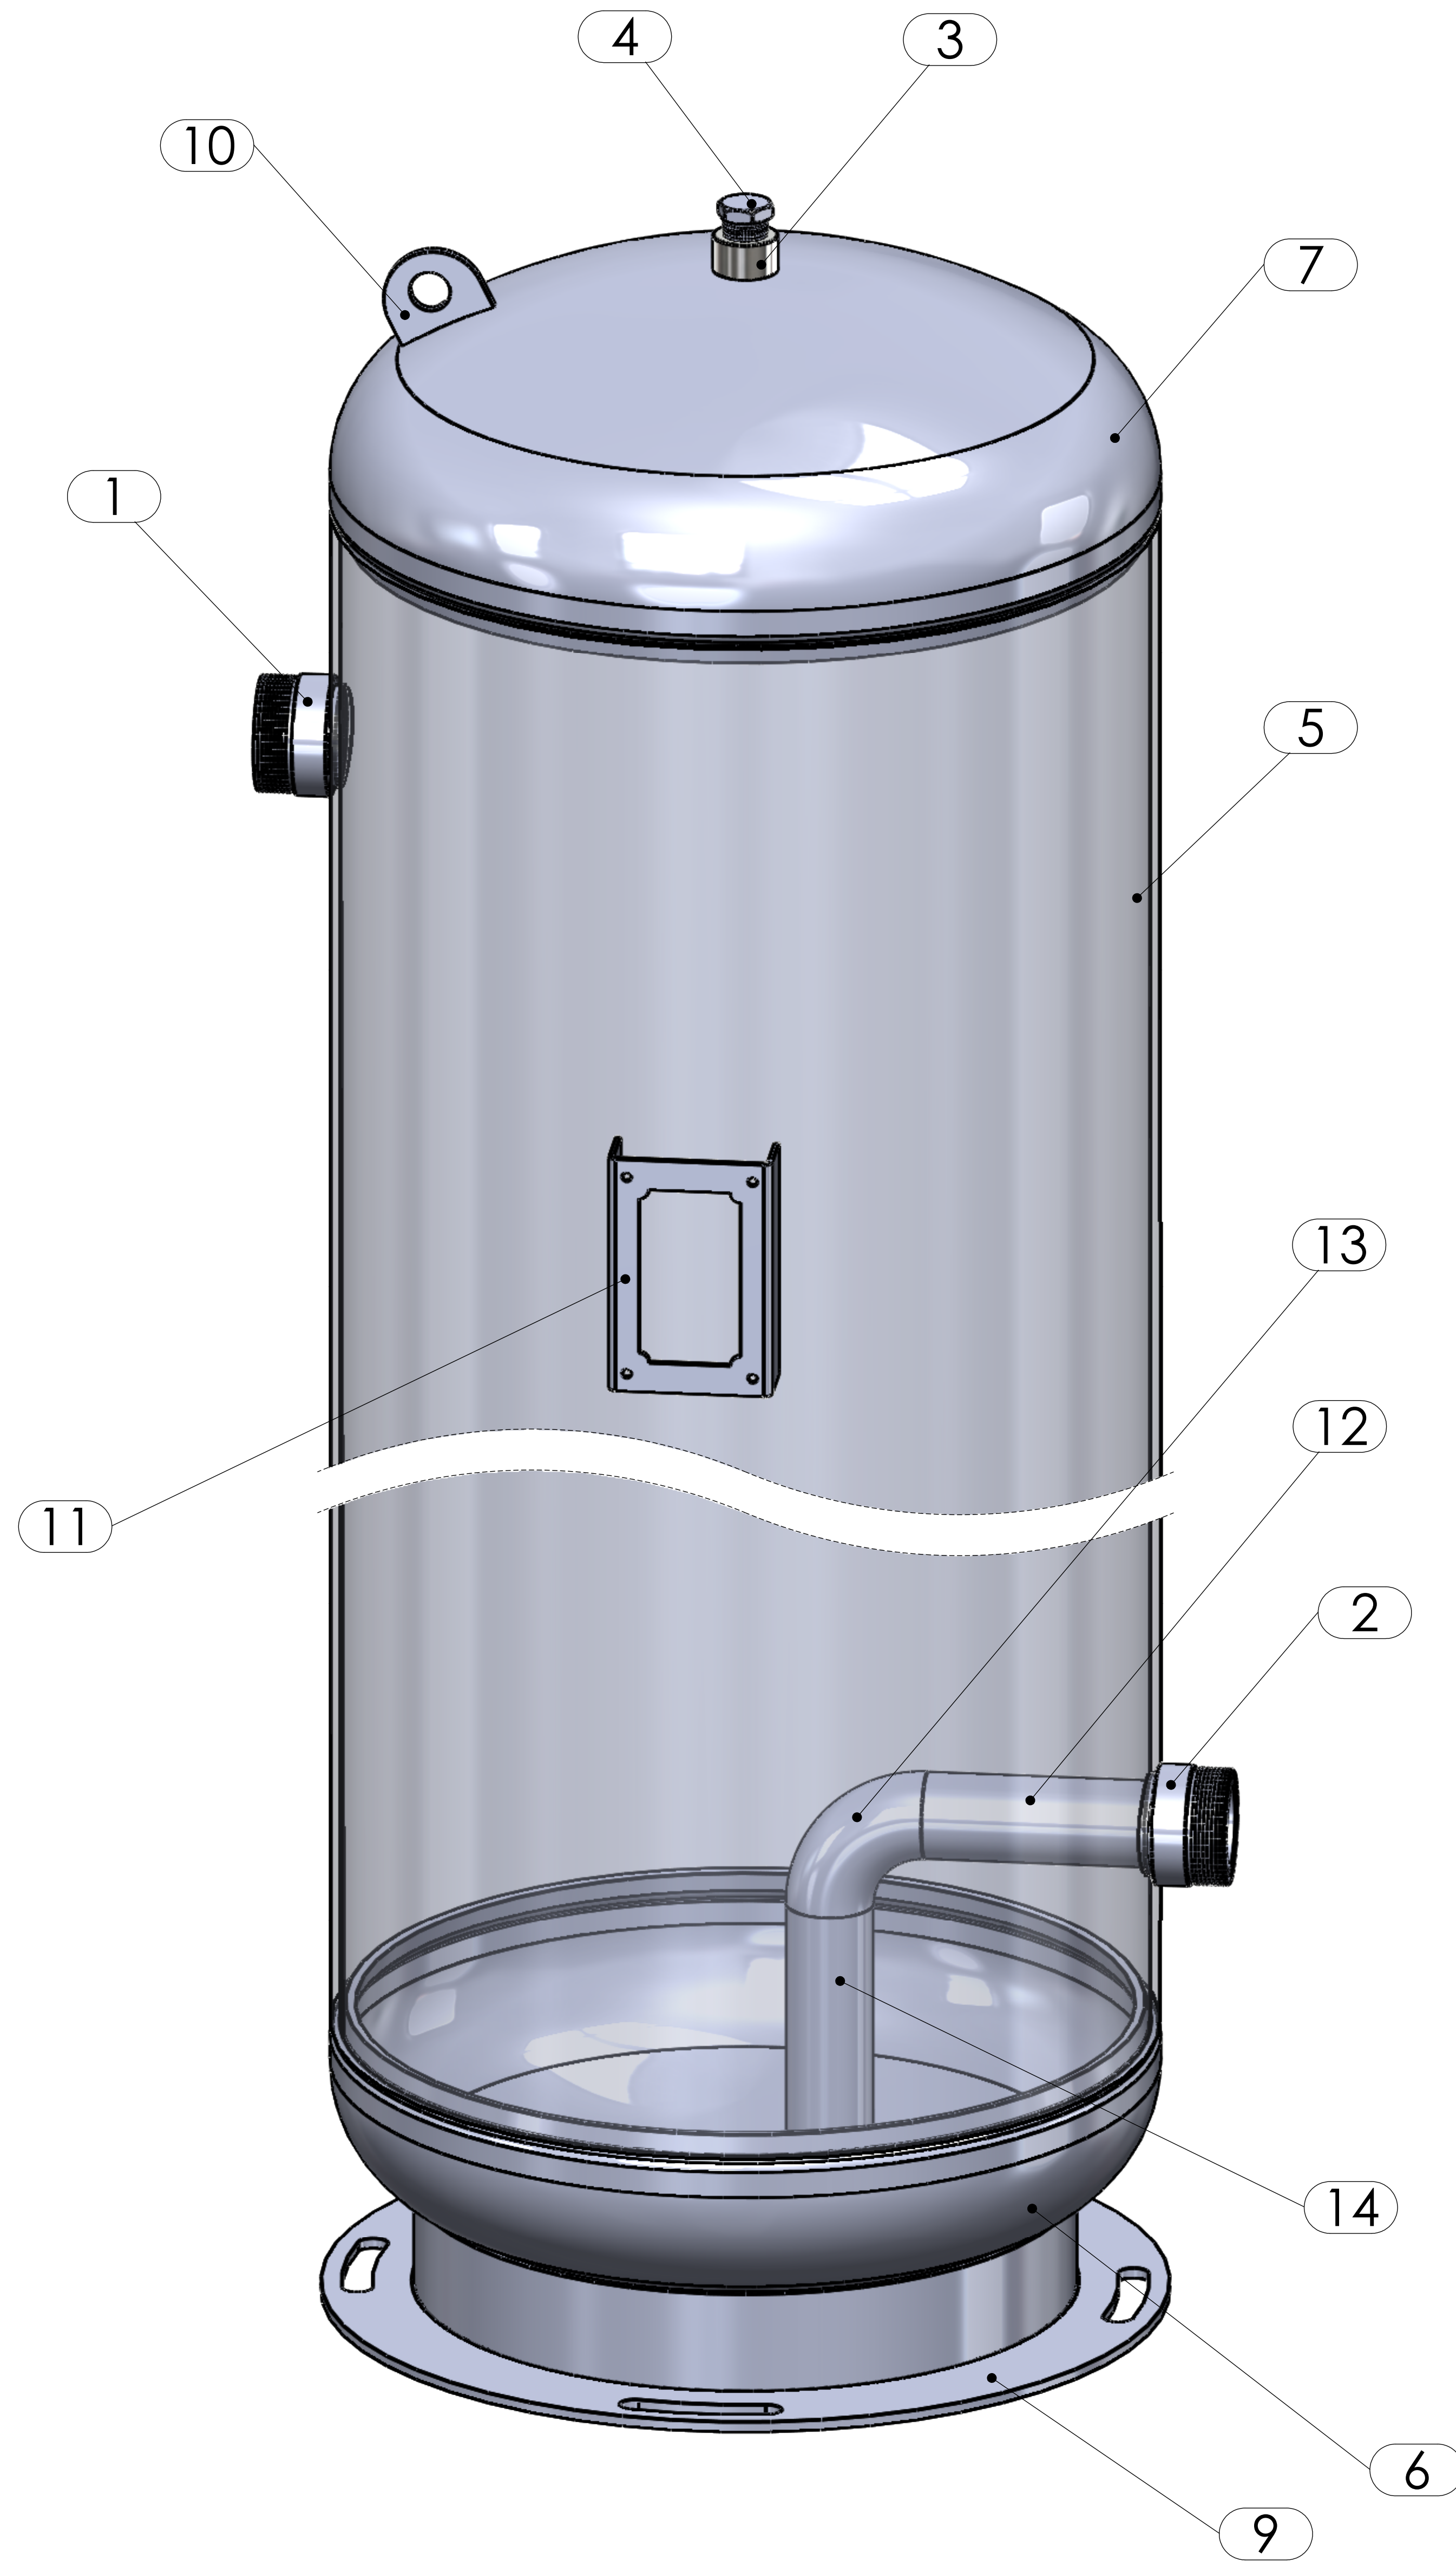
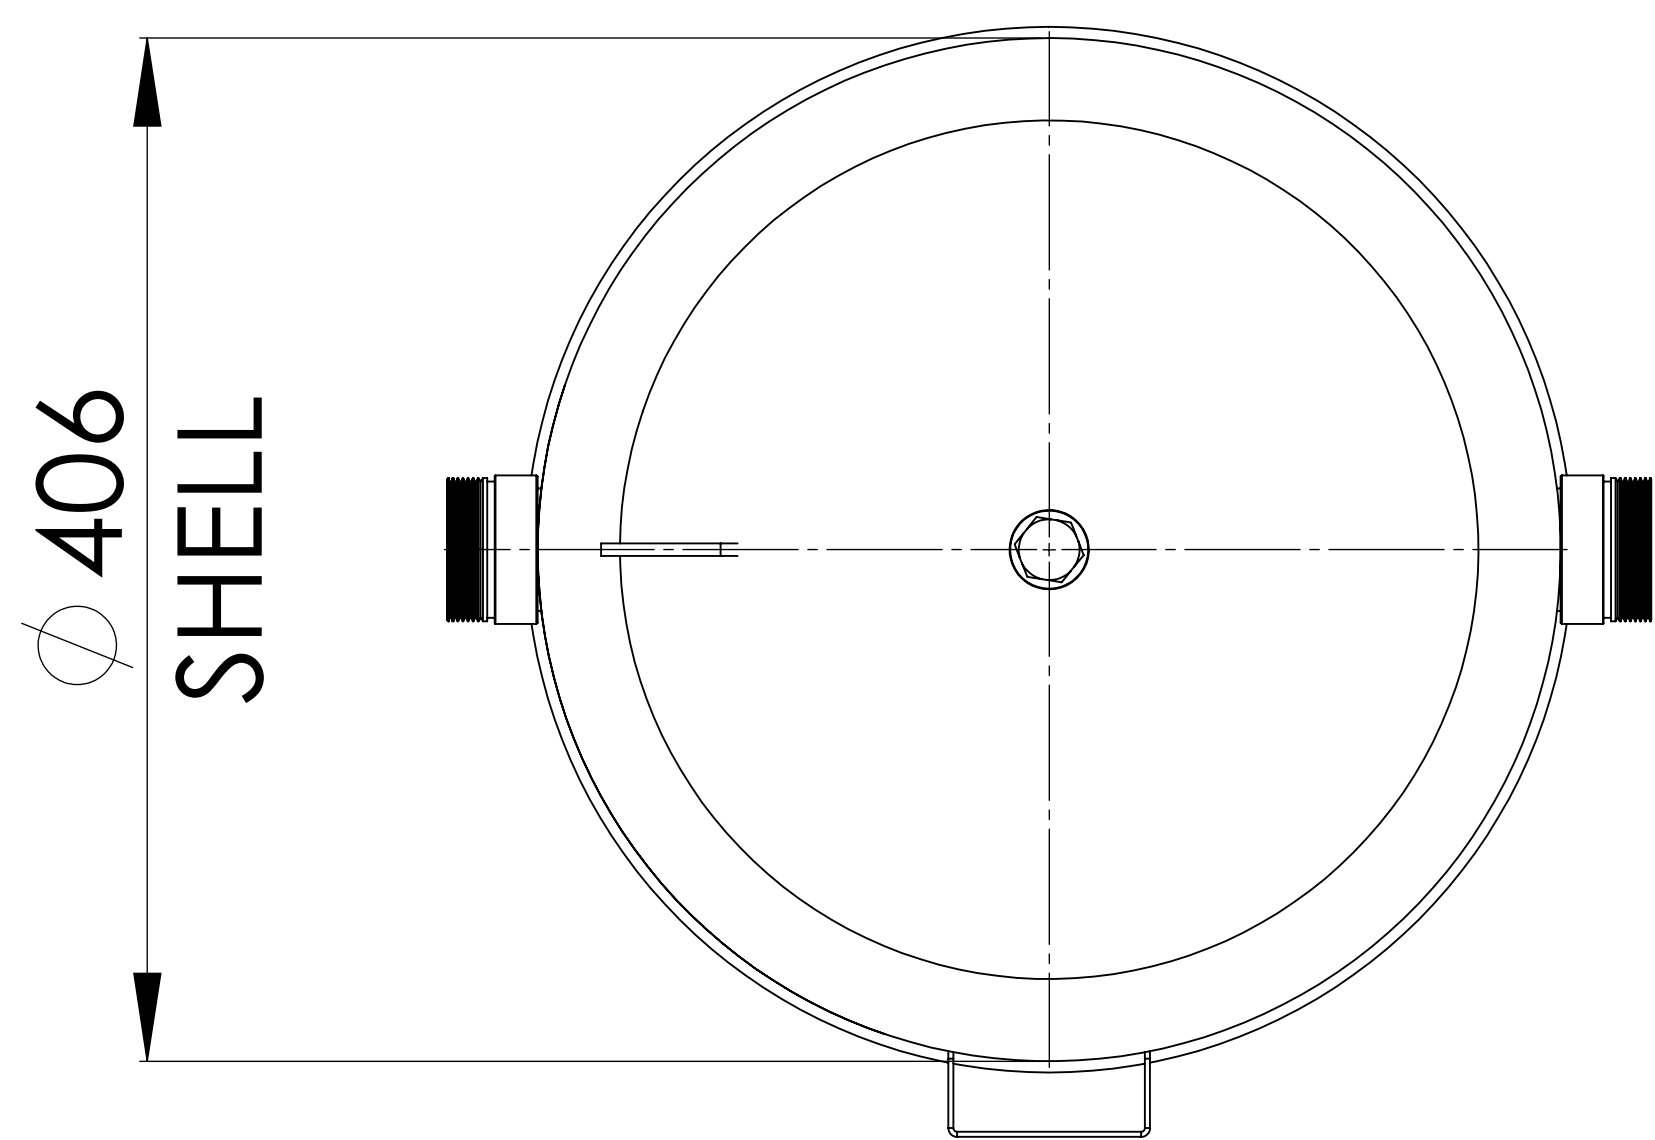


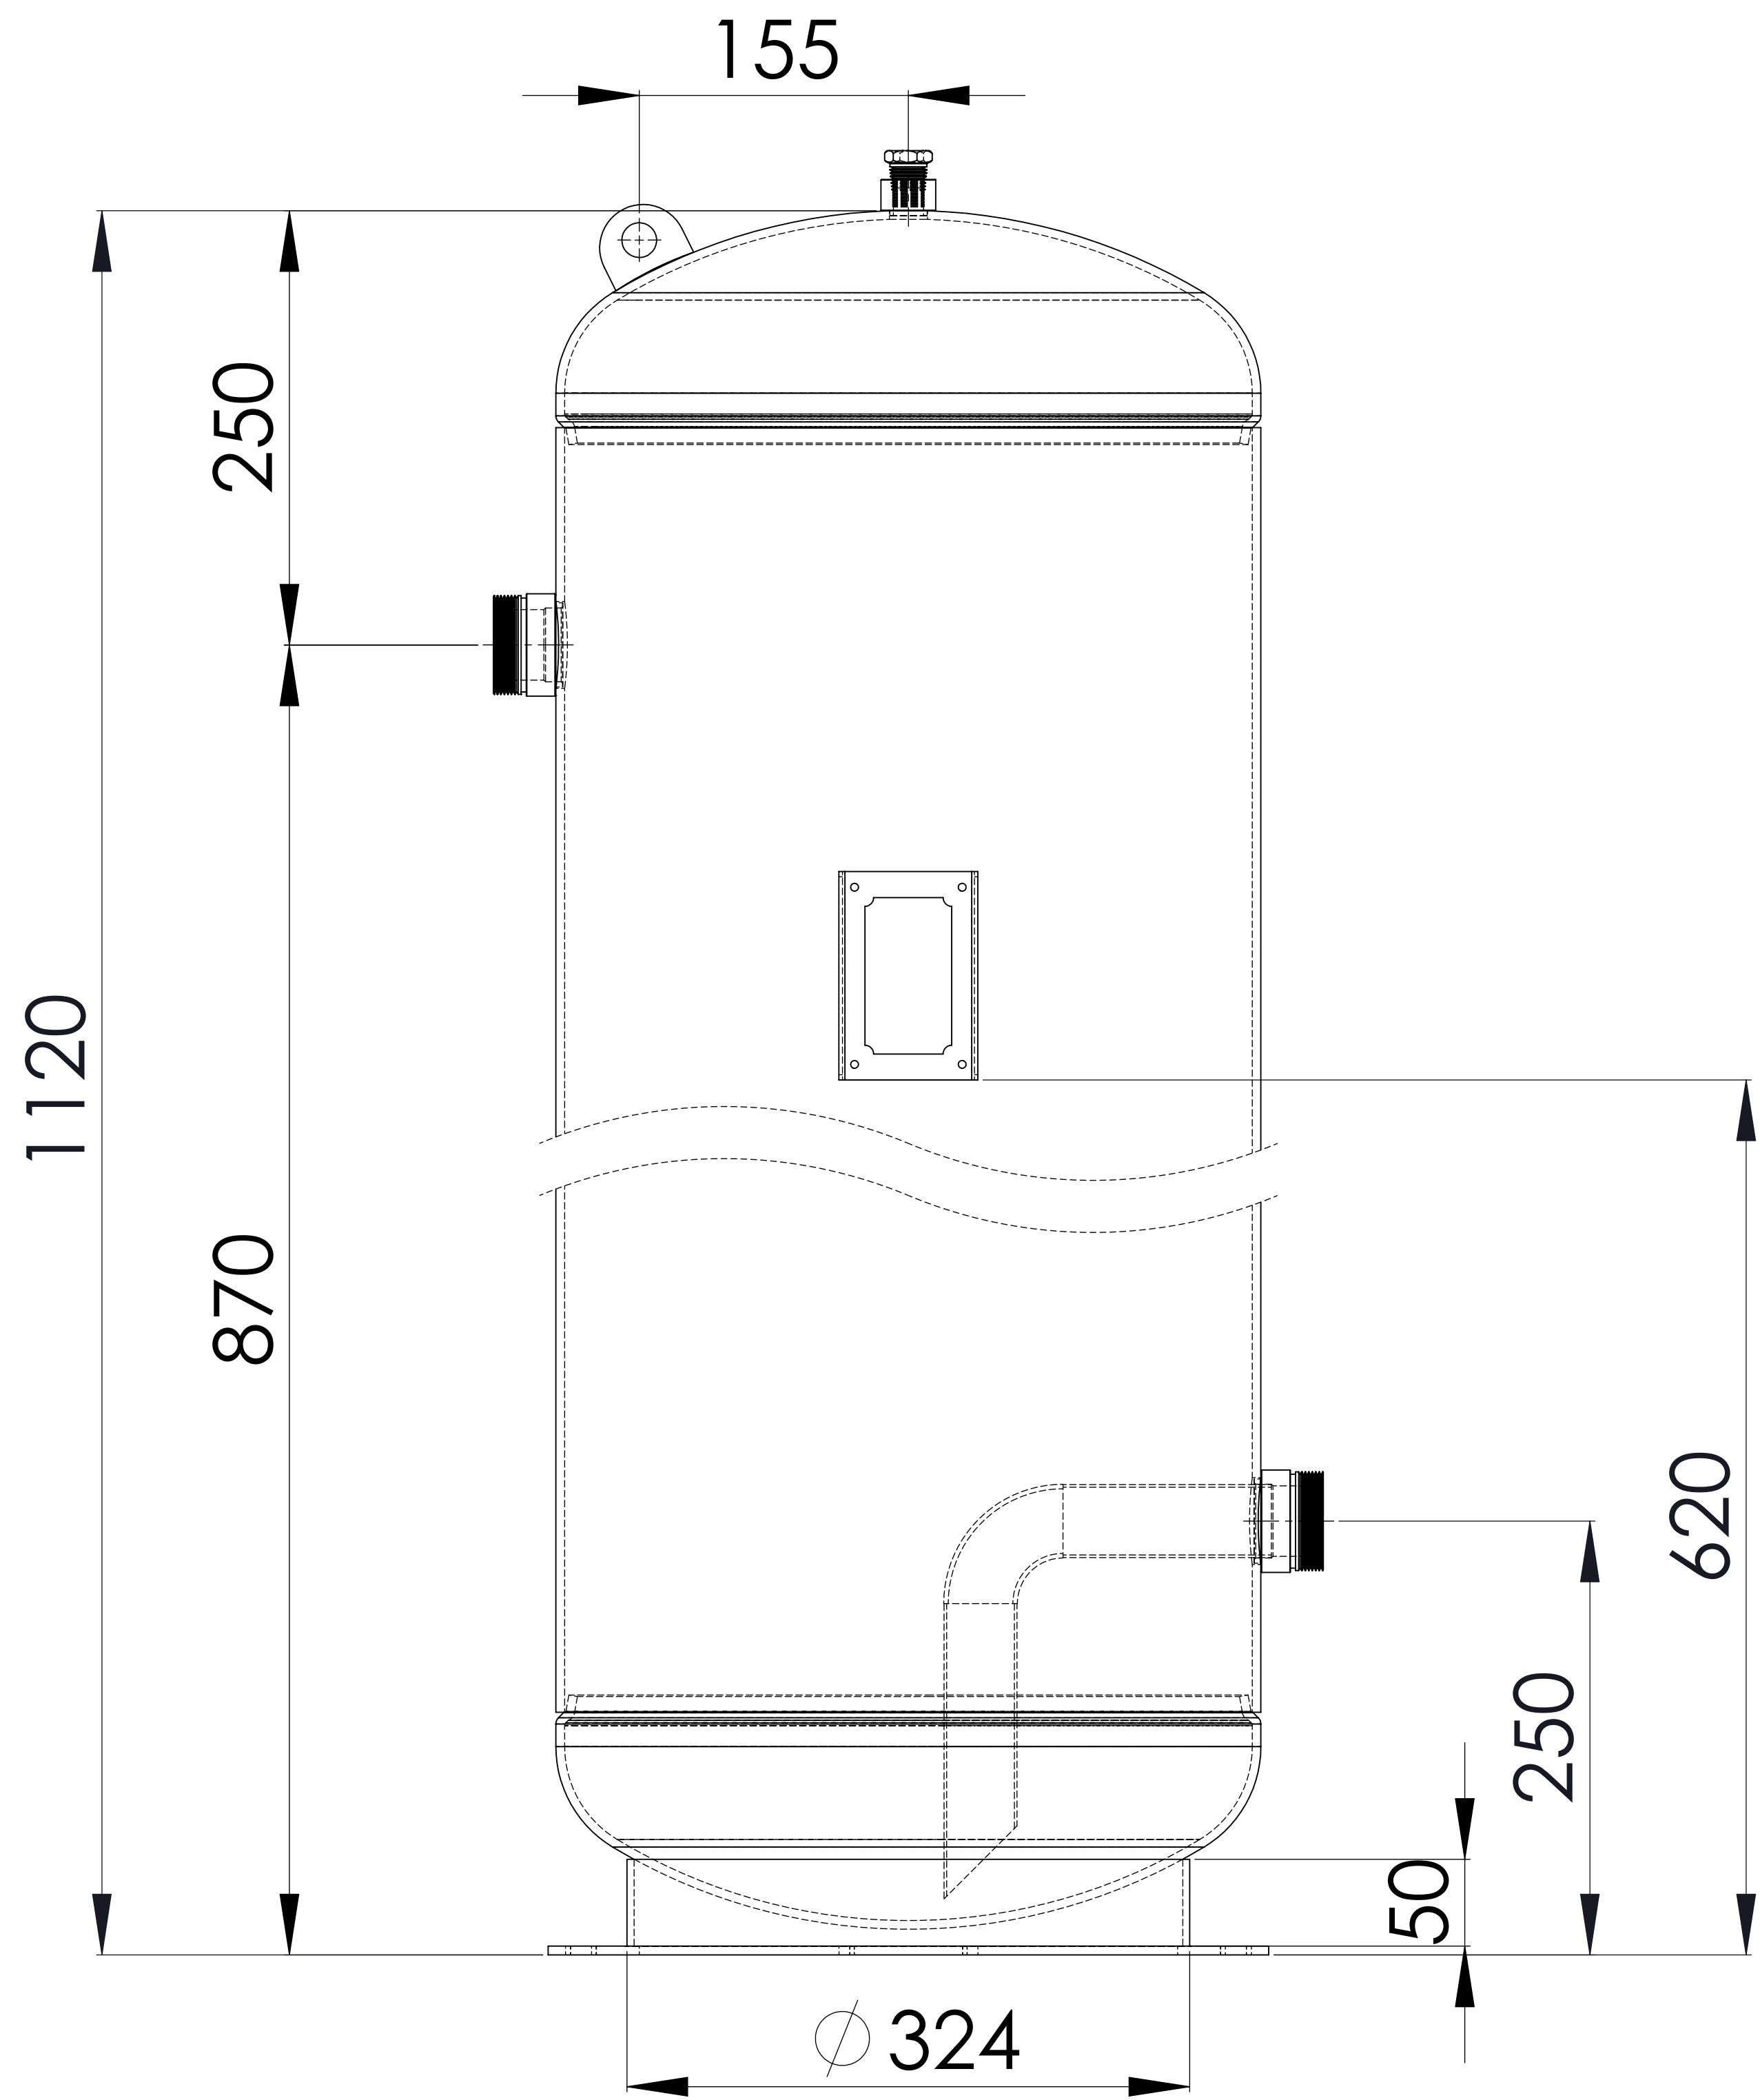

GÜVEN SOĞUTMA ÜNİTELERİ SAN. VE TİC. A.Ş.

Add.: Hastane Mah. Hadimköy İstanbul Cd. No:78/1
34555, Arnavutköy, İstanbul, TURKEY
Tel: +90 212 771 51 12 - 771 51 13
Fax: +90 212 771 51 10
www.gvn.com.tr

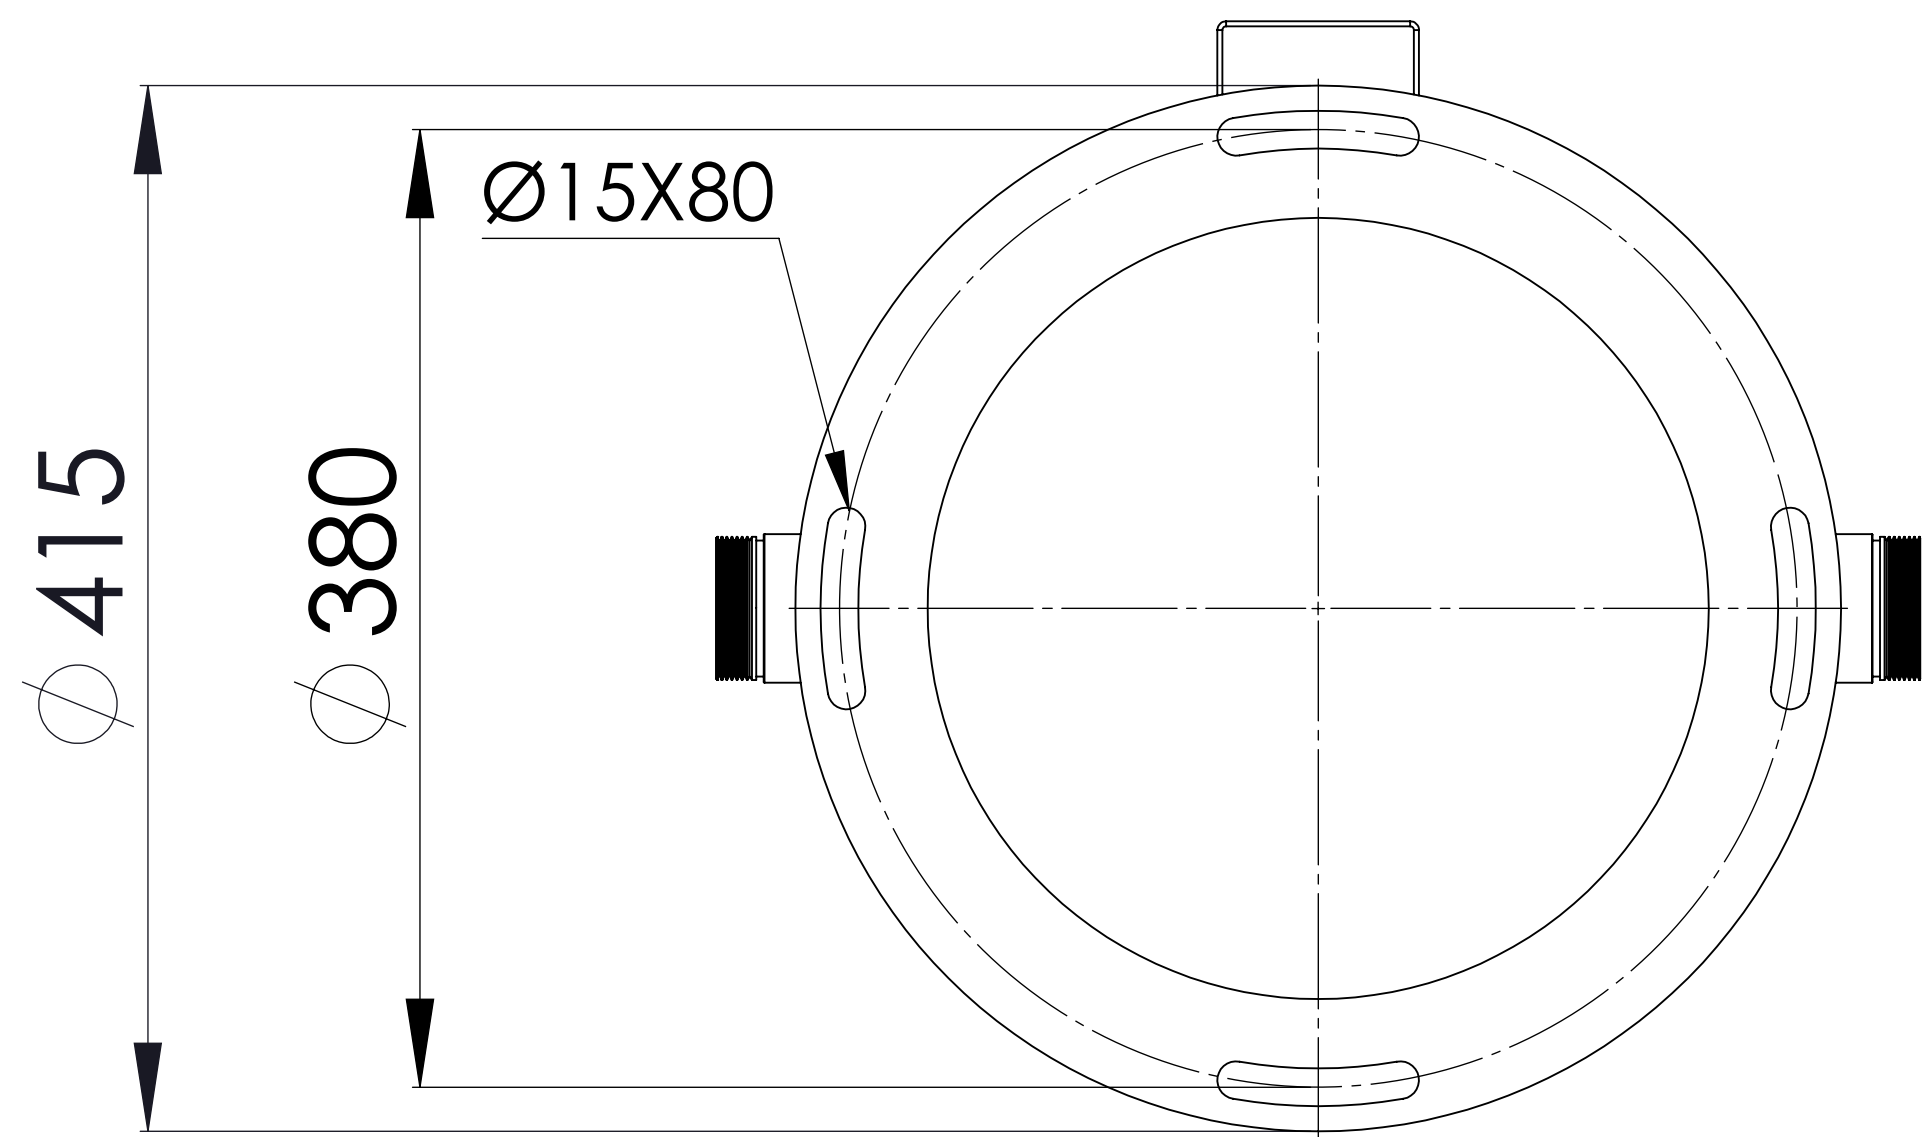

GVN STANDART PRODUCT	Customer
VERTICAL LIQUID RECEIVERS	Product
V10A.33b.125.A5.A5.F4	Code
	Customer Code

DESIGN DATA	
Capacity [Lt.]	125 Lt.
Design Pressure [PS]	33 Bar
Pneumatic Test Pressure [PT]	36 Bar
Hydraulic Test Pressure	48 Bar
Design Temperature [TS]	Min.-20C / Max.+130C
Cooler Fluid Type	HFC-CFC-HCFC
Fluid Group	2
Category	CAT IV / H1
Desing Calculation	EN 14276-1/EN 13445-3
Welded Joint Efficiency	0.85
Material Group (Shell / Head)	1.2
Testing Group	3b
Corrasion Allowance	0,1 mm
Ndt	10%
Packaging Size & Weight	00*00*00 & 00 Kg.
Drawed By	Ö.TÜRKER
Approved By	D.GÜL
Date	22.03.2022
Color	RAL 5009

MATERIAL DATA					
No	Connection	Model	Code	Material	Qty
1	Inlet Connection	ROT 2 1/4" H:36	106.060.A05.001.T36	E 275	1
2	Outlet Connection	ROT 2 1/4" H:36	106.060.A05.001.T36	E 275	1
3	Safety Valve Conn.	NPT 1/2" H:18	106.060.F04.NPT.T18	P235GH EN 10216-2	1
4	Blind Plug	NPT 1/2"Plug	106.130.F04.KTP.023	S235	1
5	Shell	Ø406x5 H:856	204.V10.33B.125.001	EN10028-2 P355GH	1
6	Head Torispheric	Ø406x5 H:125	101.033.406.001.000	P355GH EN 10028-2	1
7	Head Torispheric	Ø406x5 H:125	201.033.406.001.001	EN10028-2 P355GH	1
8	Skirt	Ø324x5 H:50	104.045.H50.415.324	S235	1
9	Base Plate	Ø415x5	105.005.415.001.001	S235	1
10	Lifting	50x40	105.011.MP0.050.040	S235	1
11	Label Plate	120x80x2	105.006.002.120.080	EN 10111 DD-13	1
12	Pipe	Ø42x1,5 H:140	204.A42.015.000.140	E235	1
13	Elbow	42.4x2,6	114.042.001.001.001	S235JR	1
14	Pipe	Ø42x1,5 H:170	204.A42.015.000.170	E235	1

GENERAL NOTES	
-Max. allowable operating pressure (PS) according to the temperature range; 1)Allowable operating temperature : min. -20C° / max. +130C° PS1 = 33 Bar 2)Allowable operating temperature : min. -40C° / max. -20C° PS2 = 24 Bar -Unless otherwise specified dimensions in MM -Unless otherwise specified do not scale -Unless otherwise specified tube must be clean&free form burrs inside&outside&suitable for soldering -Unless otherwise specified do not scale indicated thickness are min. after forming or machining -Unless otherwise specified dimension tolerances according to EN 13445-4	

REVISIONS			
No	Details Of Change	Date	By
01			
02			
03			

RELATED DRAWINGS	
No	Description
01	
02	



No	Assembly Codes	Qty
1	M005.000075	1

We reserve all rights in this document and in the information contained therein.
Reproduction use or disclosure to third parties without express authority is strictly forbidden.