

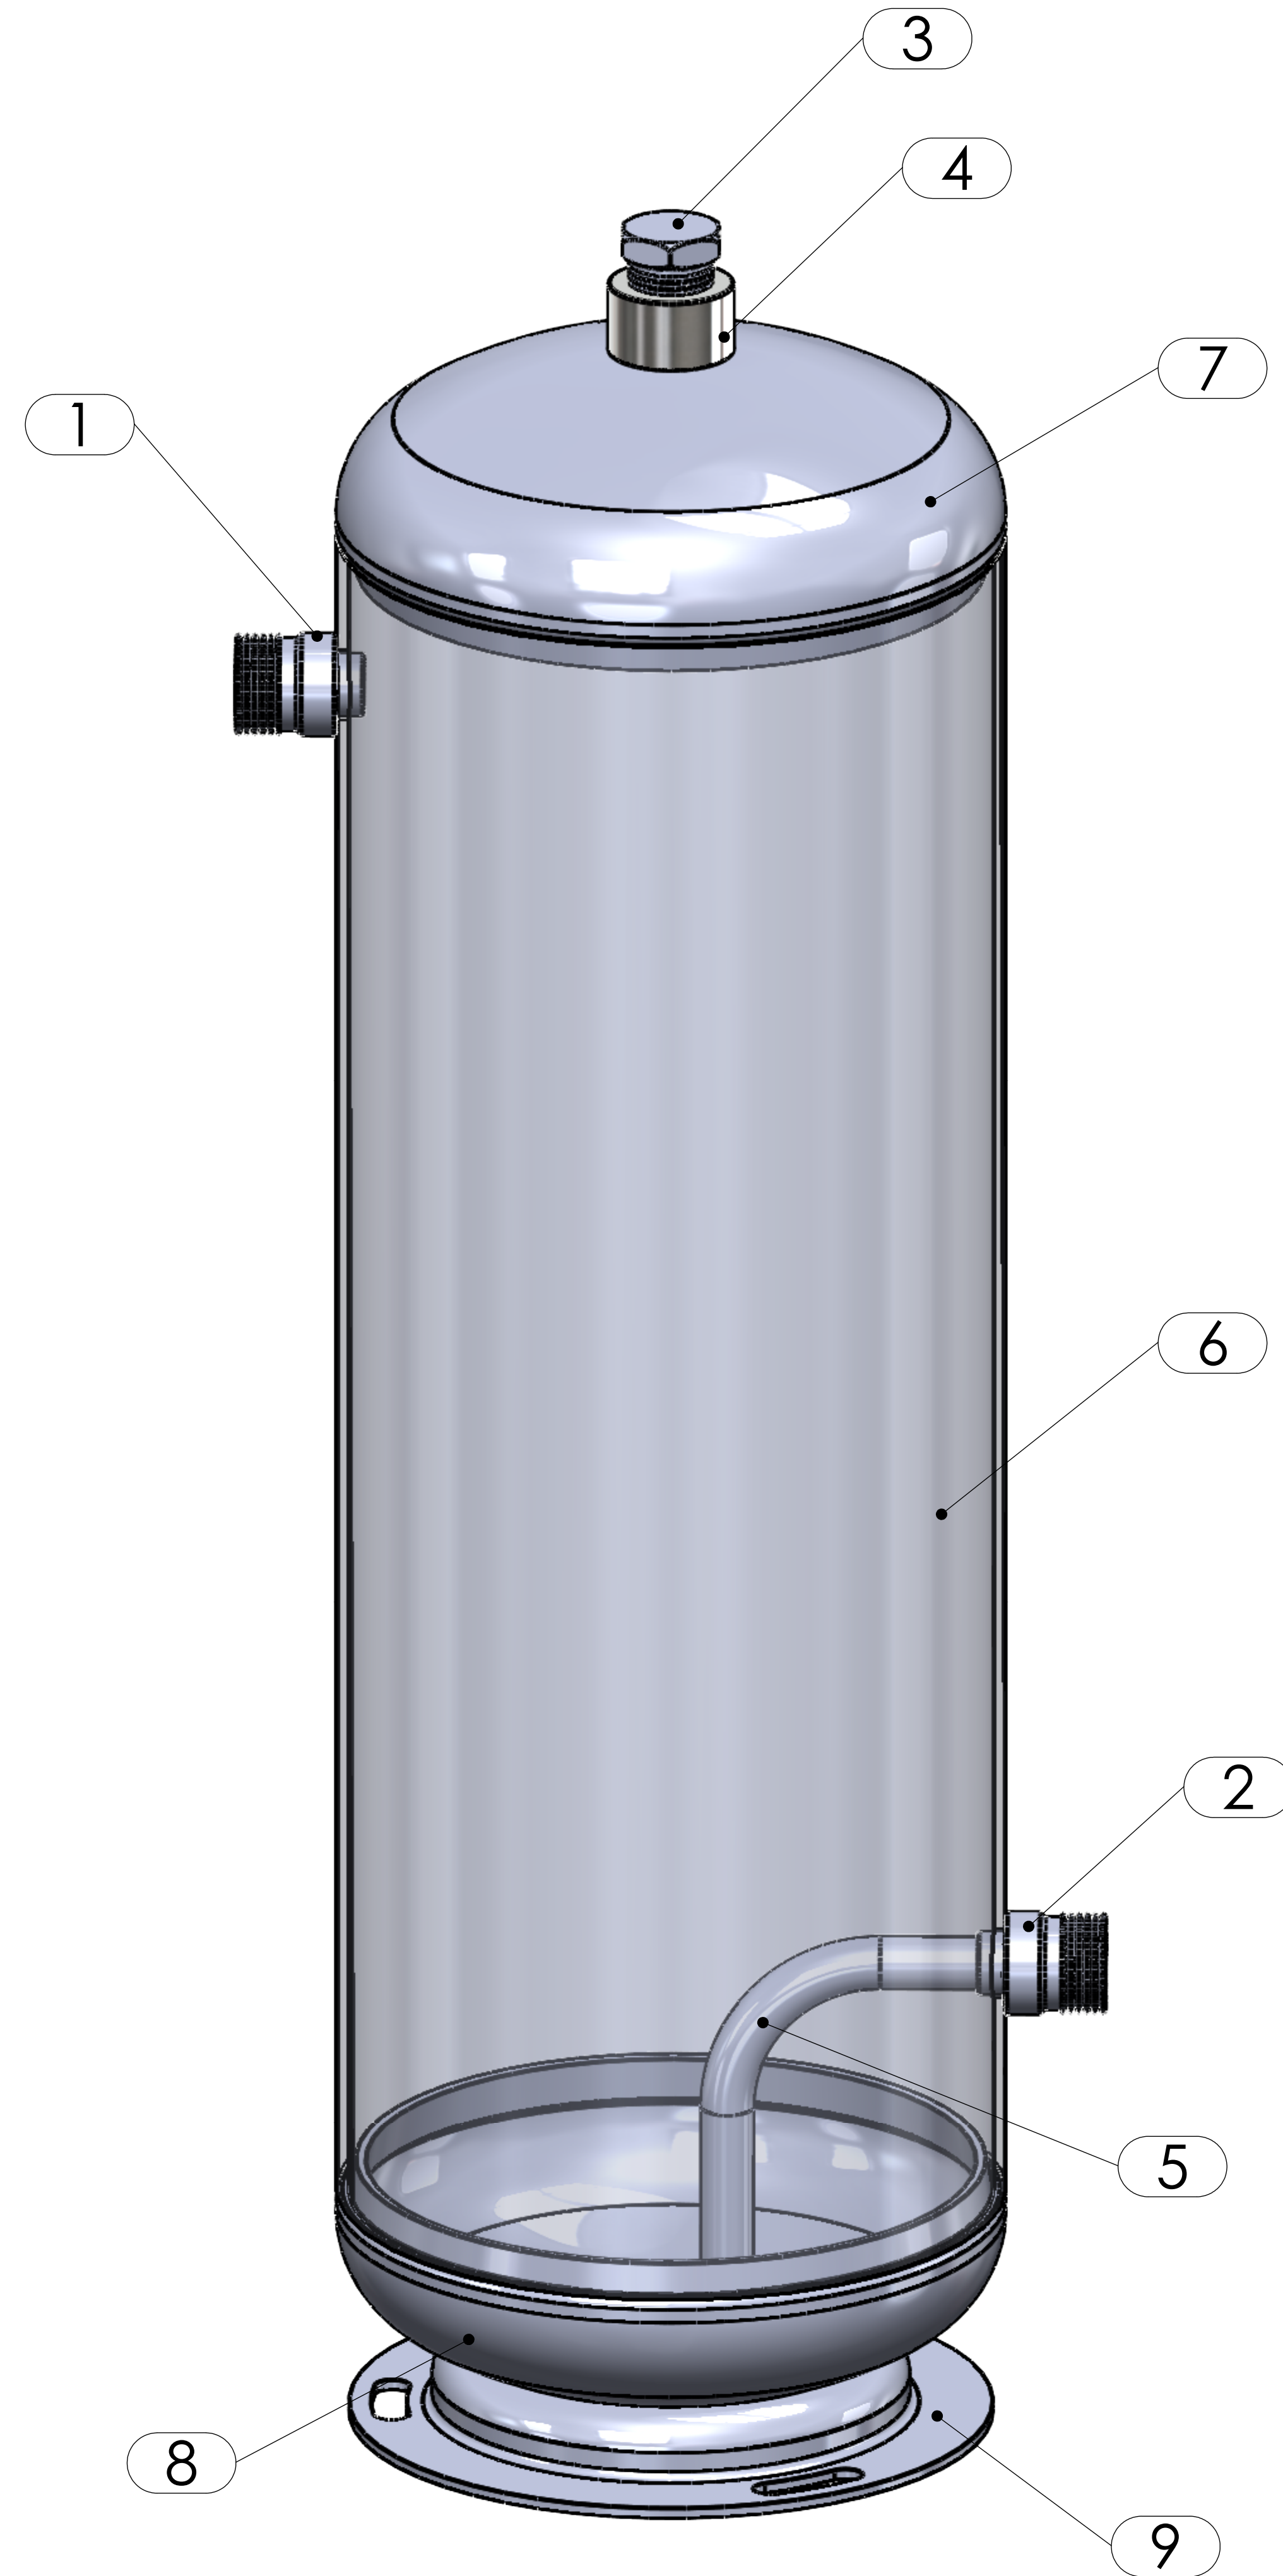


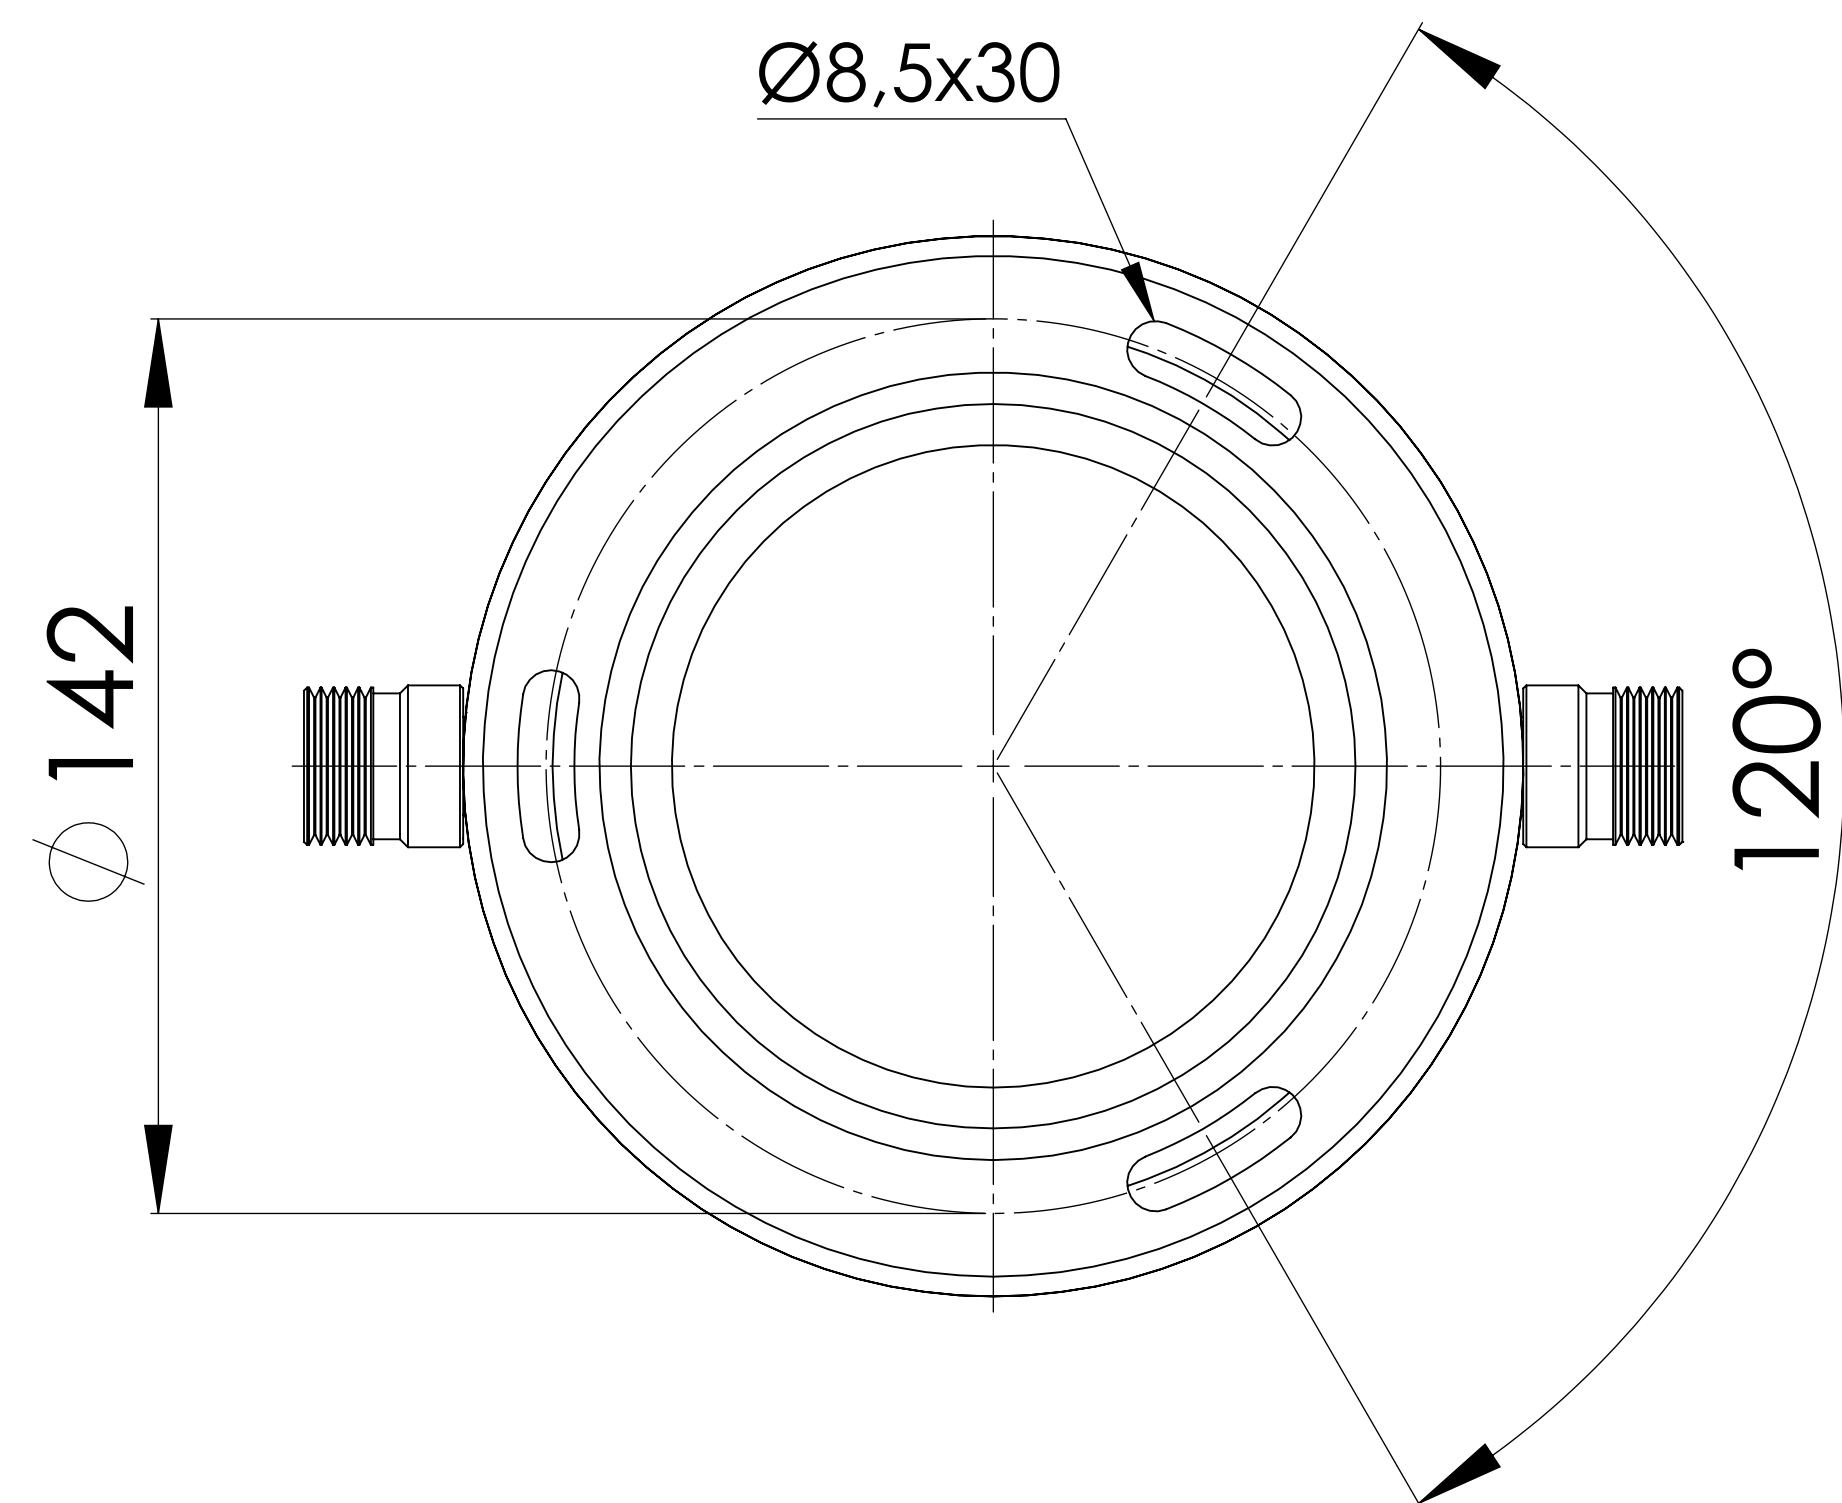

No	Assembly Codes	Qty
1	M005.000043	1

GÜVEN SOĞUTMA
ÜNİTELERİ SAN. VE TİC. A.Ş.
Add.: Hastane Mah. Hadımköy İstanbul Cd. No:78/1
34555, Arnavutköy, İstanbul, TURKEY
Tel: +90 212 771 51 12 - 771 51 13
Fax: +90 212 771 51 10
www.gvn.com.tr

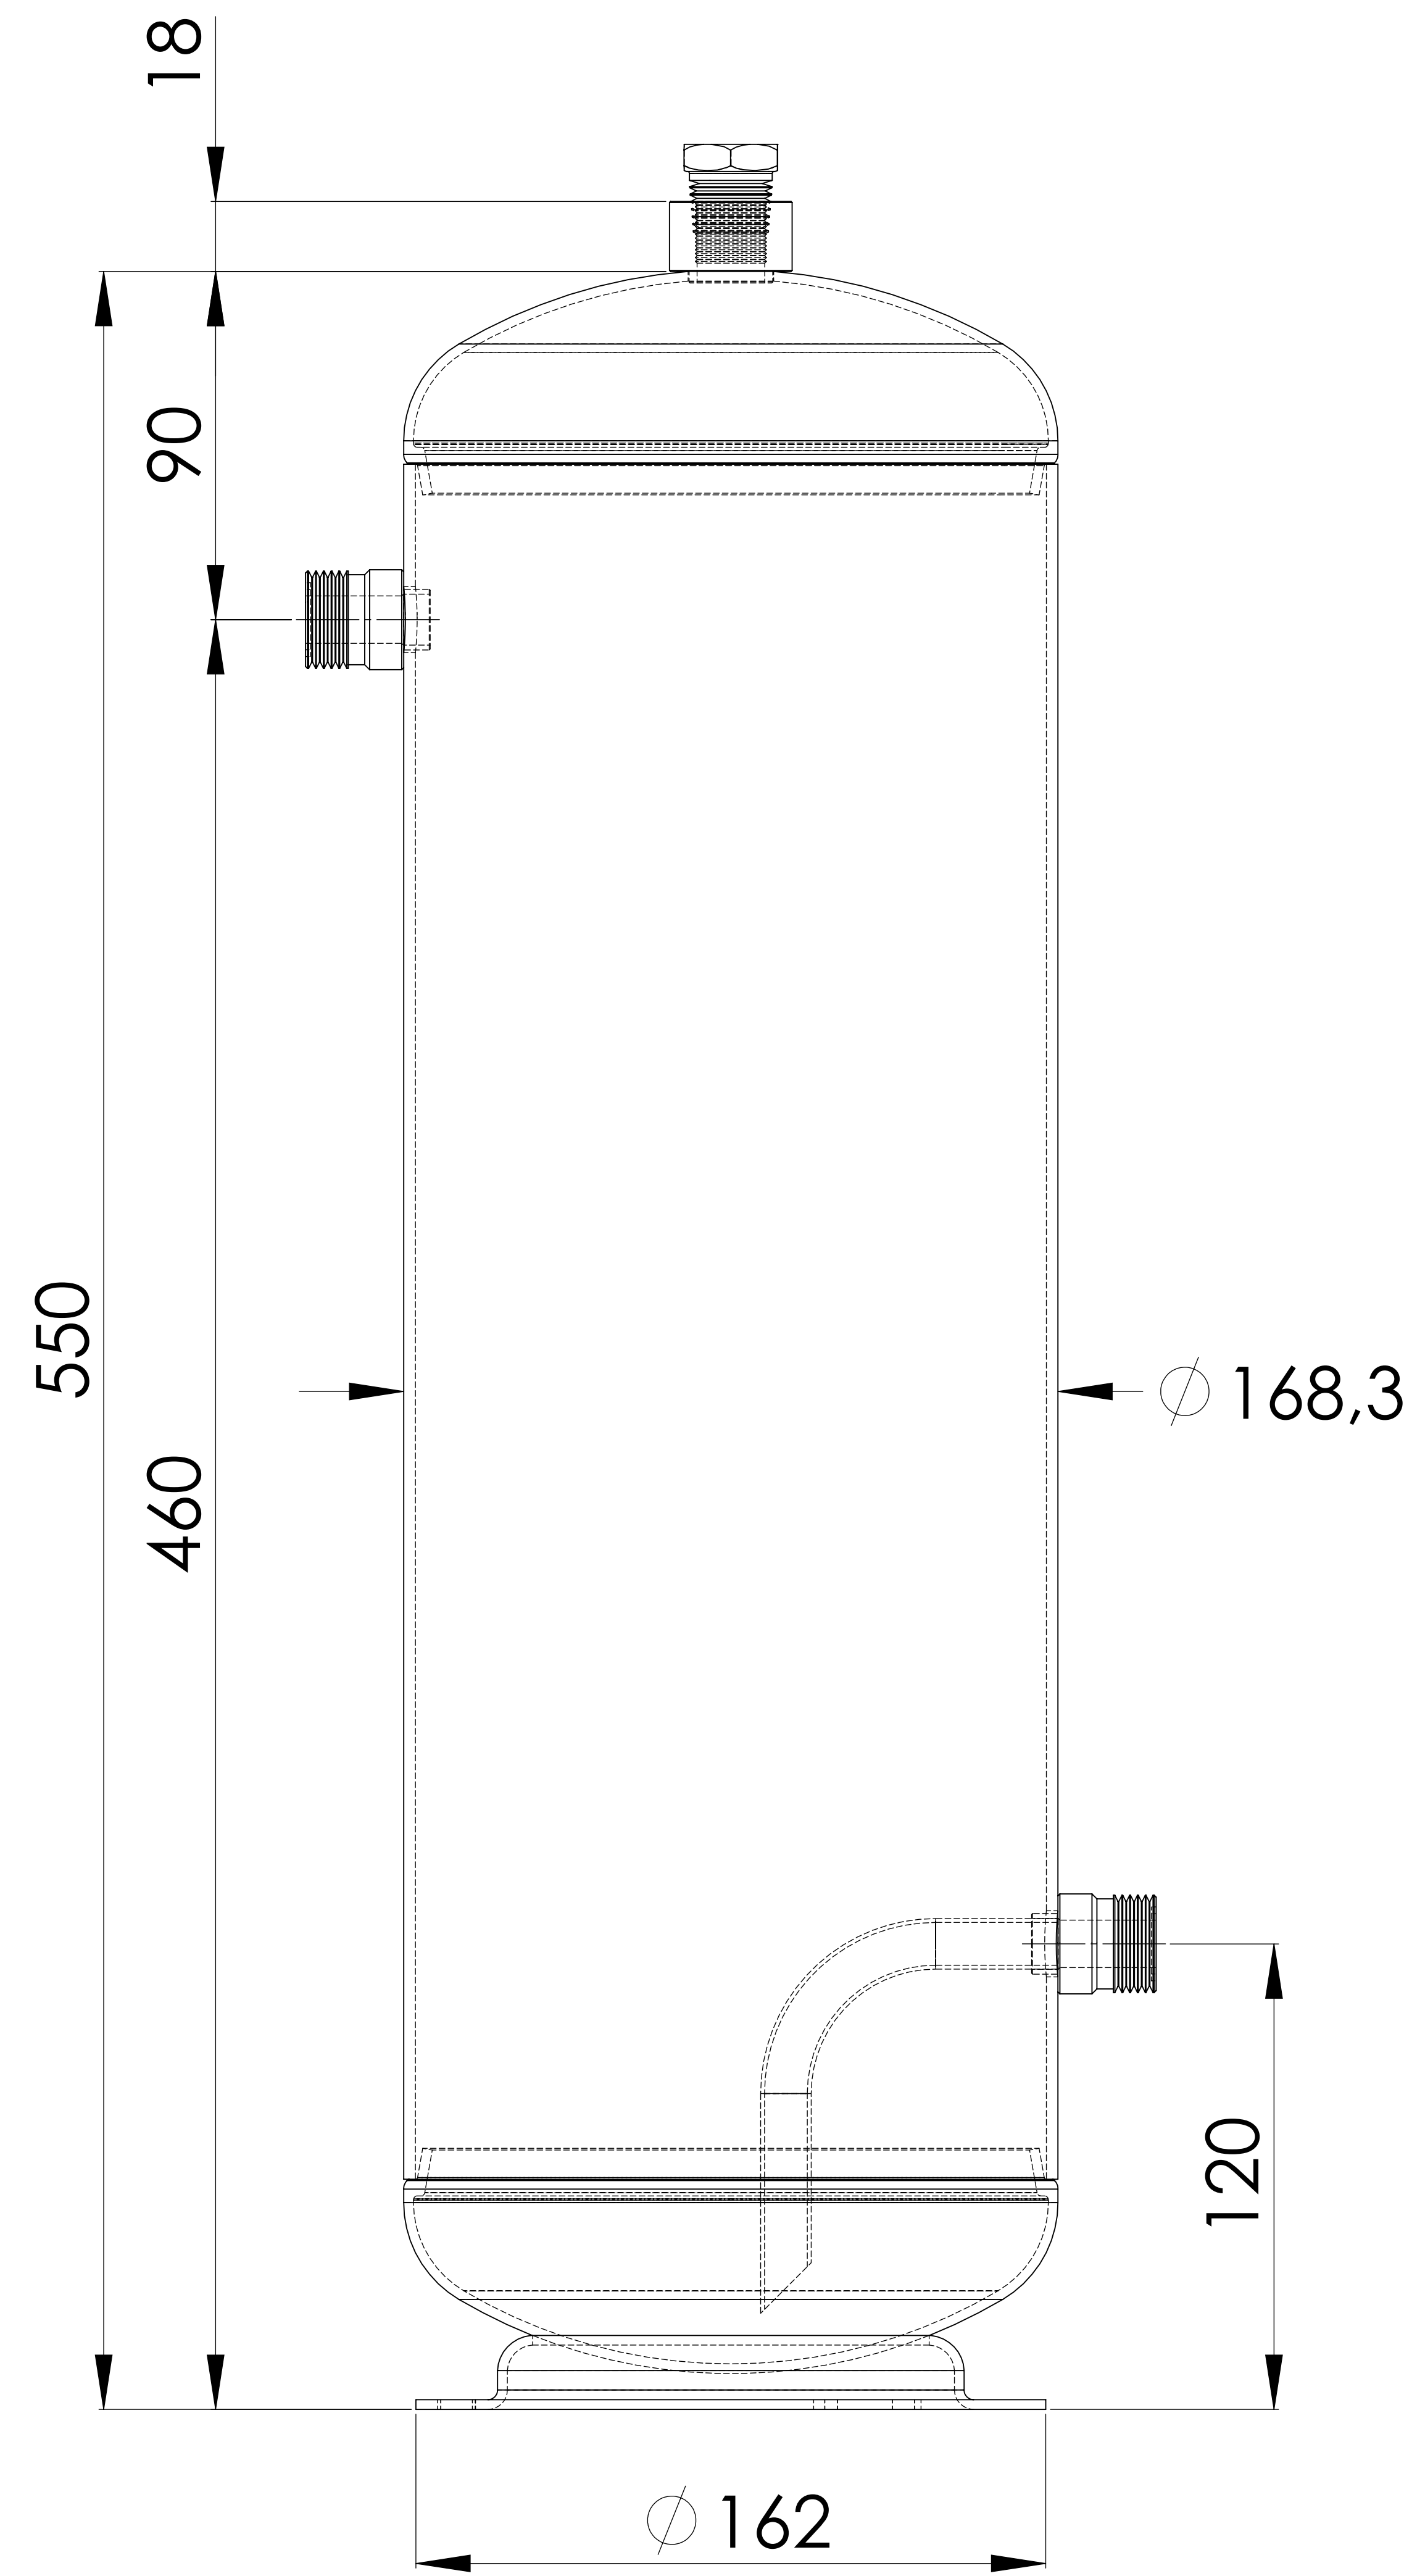

GVN STANDART PRODUCT	Customer
VERTICAL LIQUID RECEIVERS	Product
V6A.33b.10.A2.A2.F4	Code
	Customer Code

DESIGN DATA	
Capacity [Lt.]	10 Lt.
Design Pressure [PS]	33 Bar
Pneumatic Test Pressure [PT]	36 Bar
Hydraulic Test Pressure	48 Bar
Design Temperature [TS]	Min.-20C / Max.+130C
Cooler Fluid Type	HFC-CFC-HCFC
Fluid Group	2
Category	CAT II / D1
Desing Calculation	EN 14276-1/EN 13445-3
Welded Joint Efficiency	0.85
Material Group (Shell / Head)	1.2
Testing Group	3b
Corrasion Allowance	0,1 mm
Ndt	10%
Packaging Size & Weight	00*00*00 & 00 Kg.
Drawed By	Ö.TÜRKER
Approved By	D.GÜL
Date	20.06.2022
Color	RAL 5009

MATERIAL DATA					
No	Connection	Model	Code	Material	Qty
1	Inlet Connection	ROT. 1" H:25	106.060.A02.001.T25	E275- EN10297-1	1
2	Outlet Connection	ROT. 1" H:25	106.060.A02.001.T25	E275- EN10297-1	1
3	Blind Plug	NPT 1/2"Plug	106.130.F04.KTP.023	S235	1
4	Safety Valve Conn.	NPT 1/2" H:18	106.060.F04.NPT.T18	E275 EN10297-1	1
5	Pipe	Ø13x1	204.A13.010.000.120	EN10297-1 E235	1
6	Shell	Ø168,3x3 H:441	204.V06.45B.010.001	EN10217-3 P355NH	1
7	Head - Torispheric	Ø168x2,5 H:50	101.045.168.001.001	P355GH EN10028-2	1
8	Head - Torispheric	Ø168x2,5 H:50	101.045.168.001.000	P355GH EN10028-2	1
9	Skirt With	Ø162x2,5 H:18	105.004.162.001.001	DD13 EN10111	1

GENERAL NOTES			
-Max. allowable operating pressure (PS) according to the temperature range; 1)Allowable operating temperature : min. -20C° / max. +130C° PS1 = 33 Bar 2)Allowable operating temperature : min. -20C° / max. -40C° PS2 = 24 Bar -Unless otherwise specified dimensions in MM -Unless otherwise specified do not scale -Unless otherwise specified tube must be clean&free form burrs inside&outside&uitable for soldering -Unless otherwise specified do not scale indicated thickness are min. after forming or machining -Unless otherwise specified dimension tolerances according to EN 113445-4			

REVISIONS			
No	Details Of Change	Date	By
01			
02			
03			

RELATED DRAWINGS	
No	Description
01	
02	



We reserve all rights in this document and in the information contained therein.
Reproduction use or disclosure to third parties without express authority is strictly forbidden.